



## U Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

### Description:

**Model SFQ-40360311-VFVFSF-N1-M** is a broadband quadrature mixer that covers the frequency range of 40 to 60 GHz. The typical conversion loss of the quadrature mixer is 11 dB with an LO driving power of +15 dBm. The typical LO to RF port isolation is 30 dB. Since the IF port of the quadrature mixer is DC coupled, the mixer can be used as a phase detector. In addition, the mixer can be readily configured into an image rejection mixer or single sideband modulator by adding an IF quadrature coupler.



### Features:

- Compact Package
- Low Conversion Loss
- High Port Isolations
- IF Port DC Coupled for Phase Detection

### Applications:

- Phase Detection
- Speed and Ranging Radar Systems
- Communication Systems
- Test Equipment

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
RF Frequency	40 GHz		60 GHz
LO Frequency	40 GHz		60 GHz
LO Pumping Power	+13 dBm	+15 dBm	+18 dBm
IF Frequency	DC	14.0 GHz	20.0 GHz
Conversion Loss		11 dB	
I/Q Phase Unbalance		±15°	
I/Q Amplitude Unbalance		±1.0 dB	
LO to RF Port Isolation	20 dB	30 dB	
LO to IF Port Isolation		15 dB	
RF to IF Port Isolation		20 dB	
IP1dB		+4 dBm	
IP3dB		+13 dBm	
Combined RF & LO Power			+20 dBm
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C






## U-Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

### Mechanical Specifications:

Item	Specification
RF Port	V (F)
LO Port	V (F)
IF-I Port	SMA (F)
IF-Q Port	SMA (F)
Case Material	Aluminum
Finish	Gold Plated
Weight	0.68 Oz
Size	0.8" (L) 0.8" (W) X 0.39" (H)
Outline	UH-235-4C

### Typical Conversion Loss vs. Frequency


LO Power: 14 dBm; RF Power: -20dBm

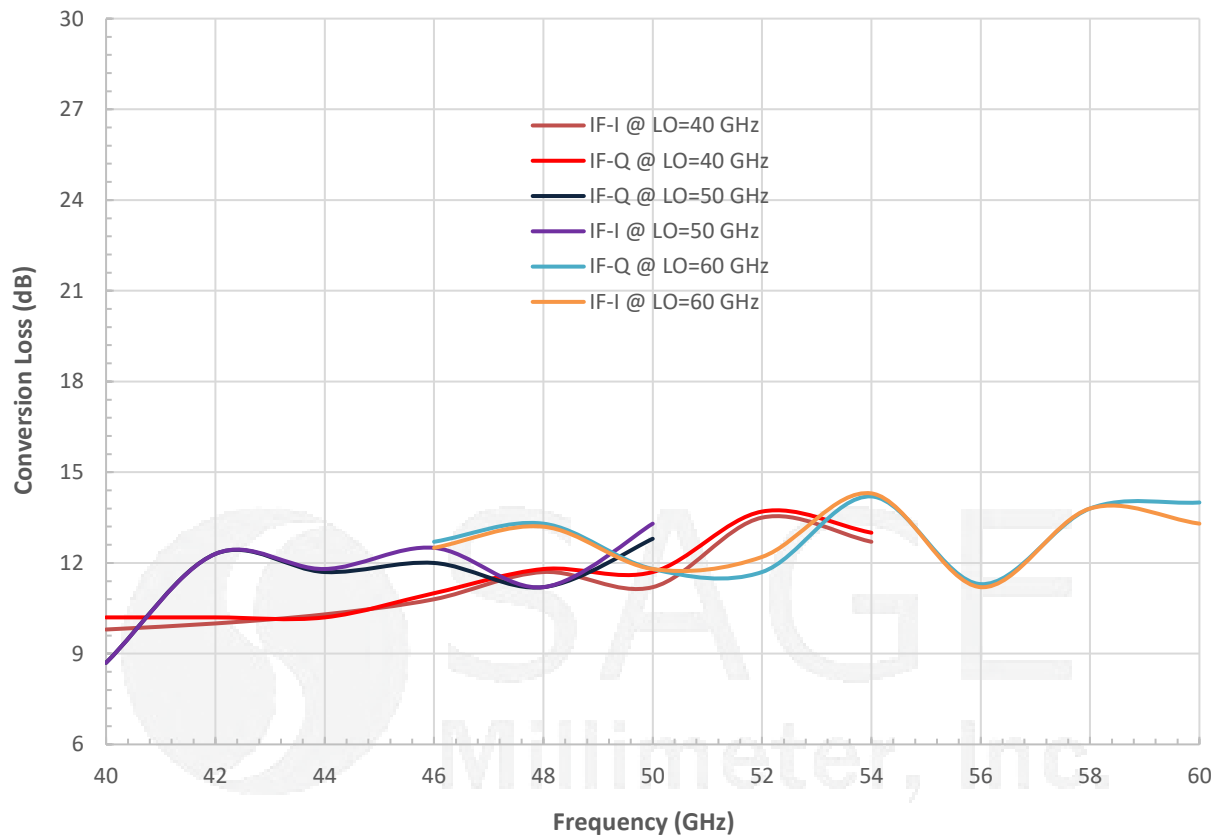



## U-Band Quadrature Mixer or Phase Detector, 40 to 60 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches [millimeters])

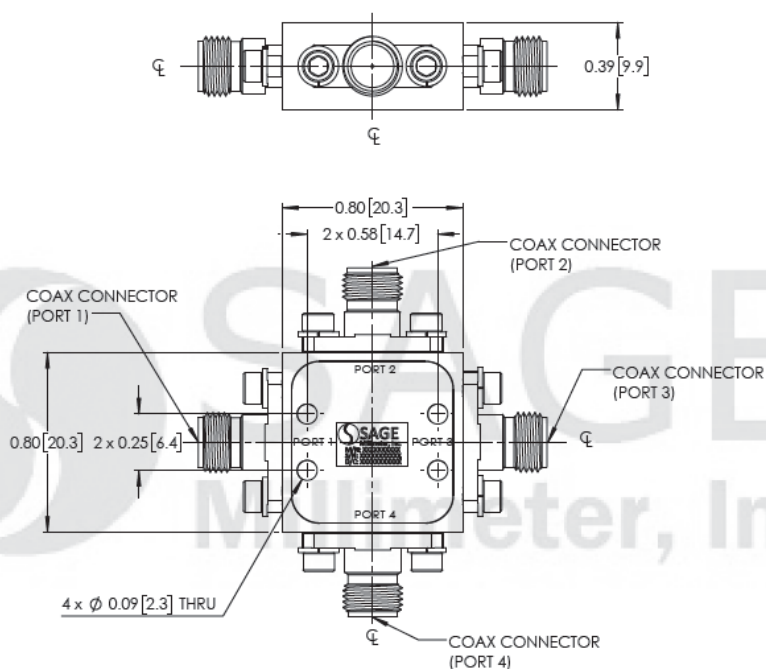

**Note:**

- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- The I/Q mixer can be configured as an image rejection mixer or used as an I/Q up-converter, single sideband modulator and phase detector.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Exceeding absolute maximum ratings will damage the device.
- The mixer is a static sensitive device. Always follow ESD rules when working with the device.
- The IF ports are DC coupled. Use DC blocks if necessary. **Do not apply an external bias voltage to the IF port.**
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

