



A Tallysman *Accutenna*™ TW3400/TW3402 GPS/GLONASS Antenna

The TW3400/TW3402 employs Tallysman's unique *Accutenna*™ technology covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency band (1574 to 1606 MHz). They are especially designed for precision industrial, agricultural and military applications. . They provide truly circular response over the antennas' entire bandwidth thereby producing superior multipath signal rejection.

The TW3400/TW3402 feature a highly circular dual-feed wideband patch element, with a two stage Low Noise Amplifier, comprised of one input LNA per feed, a mid section SAW to filter the combined output, and a final output gain stage. This configuration provides excellent axial ratio that is constant across the full frequency band. An optional tight pre-filter is available on the TW3402 to protect against saturation by high level sub-harmonic and L-Band signals.

The TW3400/TW3402 is housed in a permanent mount industrial grade weather-proof enclosure. Two options for pole mounting are available an L-bracket (P/N#23-0040-0) or a pipe mount (P/N#23-0065-0).


Applications

- High Accuracy & Mission Critical Global Positioning
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- Fleet Management & Asset Tracking



TW3400 Dimensions (mm)

Flat radome is shown, Conical Radome also available

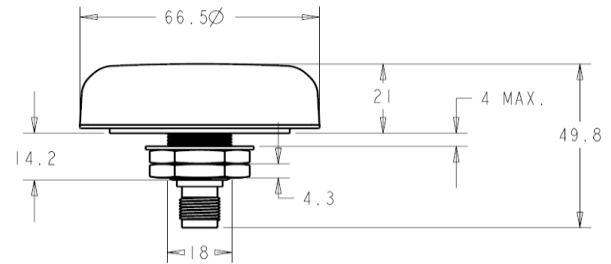

Features

- Great axial ratio: 1 dB typ.
- Low noise LNA: 1 dB
- High rejection SAW filter
- High gain LNA: 28 dB typ.
- Low current: 10 mA typ.
- Wide voltage input range: 2.5 to 16 VDC
- IP67 weather proof housing

Benefits

- Excellent circular polarisation
- Excellent multipath rejection
- Excellent signal to noise ratio
- Great out of band signal rejection
- Increased system accuracy
- Ideal for harsh environments
- RoHS and REACH compliant



TW3400/TW3402 GPS/GLONASS Antenna

Specifications

Antenna

Architecture	Dual, Quadrature Feeds
1 dB Bandwidth	30 MHz
Antenna Gain (with 100mm ground plane)	4.25 dBic
Axial Ratio (over full bandwidth)	<1 dB @zenith., 3 dB max.

Electrical

Filtered LNA Frequency Bandwidth	1574 to 1606 MHz
Polarization	RHCP
LNA Gain	28 dB min., 1575.42 to 1606 MHz
Gain flatness	+/- 2 dB, 1575 to 1605 MHz
Out-of-Band Rejection	<1500 MHz >32 dB (TW3400) >50dB (TW3402)
	<1550 MHz >25 dB >50dB
	>1640 MHz >35 dB >75dB
VSWR (at LNA output)	<1.5:1
Noise Figure	1 dB typ. (TW3400) 3.5 dB typ (TW3402)
Supply Voltage Range (over coaxial cable)	2.5 to 16 VDC nominal (12VDC recommended maximum)
Supply Current	10 mA typ.
ESD Circuit Protection	15 KV air discharge

Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21 mm H
Operating Temp. Range	-40 to +85 °C
Enclosure	Radome: EXL9330, Base: Zamak White Metal (M18x1thread)
Weight	150 g
Attachment Method	Permanent 3/4" (19mm) through hole mount
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Salt Spray	MIL-STD-810F Section 509.4

Ordering Information

TW3400 – GPS/GLONASS antenna 33-3400-xx-yy-zzzz TW3402 - 33-3402-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome, and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

106 Schneider Road, Unit 3
Ottawa ON K2K 1Y2 Canada Tel 613 591 3131 Fax 613 591 3121
sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2015 Tallysman Wireless Inc. All rights reserved. Rev 4.4