



Ka-Band Power Amplifier, 27 to 41 GHz, 25 dB Gain, 30 dBm P_{1dB}

Description:

Model SBP-2734132530-KFKF-E1-HR is a power amplifier with a small signal gain of 25 dB, and a typical P_{1dB} of +30 dBm across the frequency range of 26.5 to 41 GHz. The DC power requirement for the amplifier is +8 V_{DC}/3000 mA. The input and output port configurations are both female 2.92 mm (K) connectors. Other port configurations, such as male 2.92 mm (K) connectors and WR-28 waveguides for either the input or output port, are also available under different model numbers.



Features:

- High Output Power
- Medium Gain

Applications:

- Radar Systems
- Communication Systems
- Test Equipment

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	26.5 GHz		41 GHz
Gain		25 dB	
P _{1dB}		+30 dBm	
P _{sat}		+33 dBm	
P _{in}			+10 dBm
Input Return Loss		10 dB	
Output Return Loss		10 dB	
DC Voltage		+8 V _{DC}	+12 V _{DC}
DC Supply Current		3000 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

Mechanical Specifications:

Item	Specification
Input Port	2.92 mm (F)
Output Port	2.92 mm (F)
Bias	Solder Pin
Case Material	Aluminum
Finish	Gold Plated
Weight	1.07 lb
Size	3.15" (L) X 3.15" (W) X 3.48" (H)
Outline	BK-SC-C1-H






Ka-Band Power Amplifier, 27 to 41 GHz, 25 dB Gain, 30 dBm P_{1dB}


Typical Gain and Return Loss vs. Frequency

Bias: +8 V_{DC}/2.4A

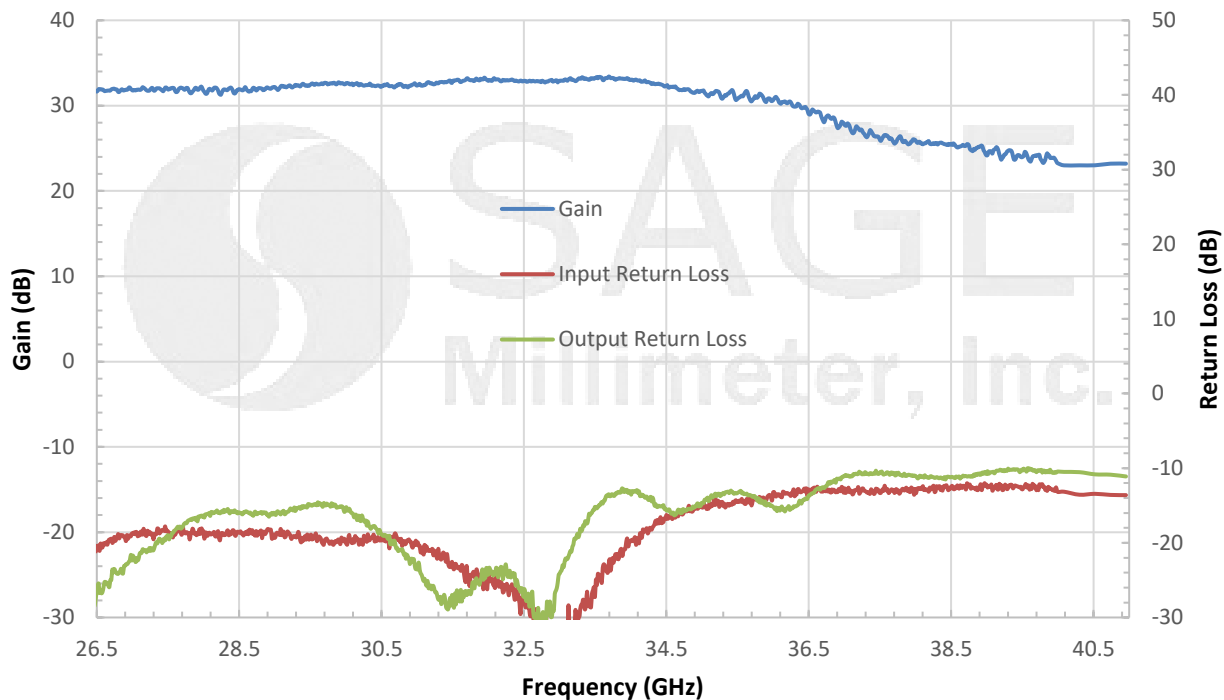

Typical P_{1dB} and Psat vs. Frequency


Bias: +8V_{DC}/2.4A

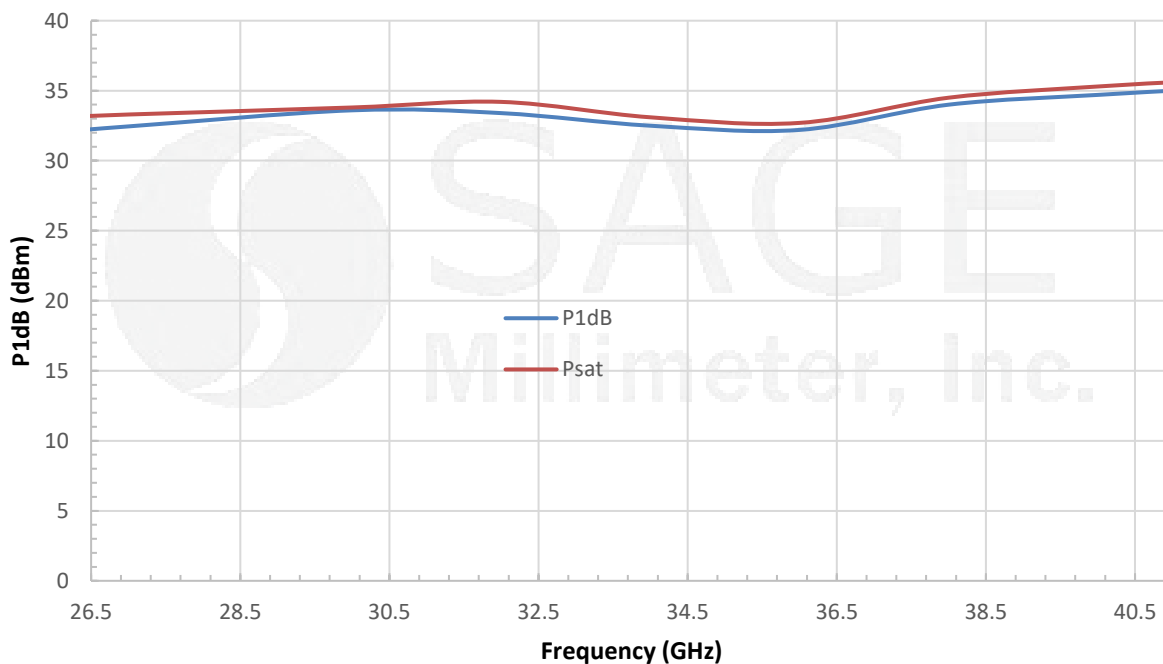



Ka-Band Power Amplifier, 27 to 41 GHz, 25 dB Gain, 30 dBm P_{1dB}

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

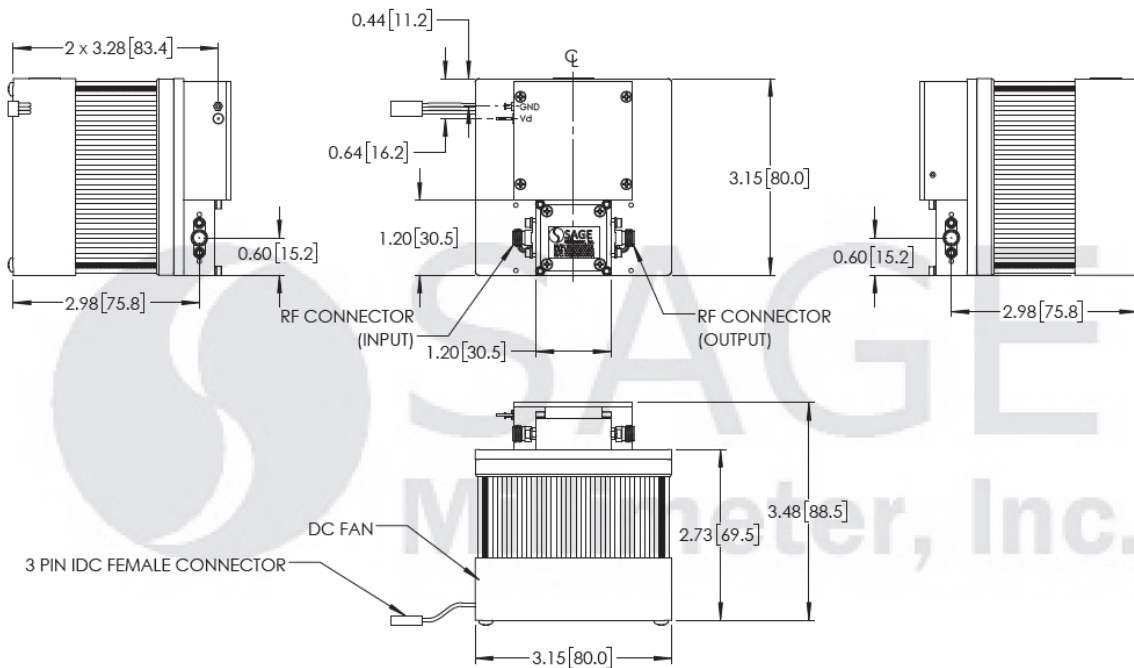

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.
- Other mechanical configurations are available under different model numbers.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The device is static sensitive. Always follow ESD rules when working with the device.
- The case temperature of the device shall never exceed +50 °C. Use proper heatsink or fan if necessary.
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

