



SPDT PIN Switch with TTL Driver, 75 to 110 GHz, Reflective

Description:

Model SKD-7531143530-1010-R1-M is a reflective PIN diode based, single pole, double throw (SPDT) switch with a TTL driver that operates from 75 to 110 GHz. The SPDT switch requires a separate -5 V and +5 V biasing in addition to the TTL control. This model has an insertion loss of 3.5 dB typical and an isolation of 30 dB nominal at its center frequency. The SPDT switch features WR-10 waveguides with UG-387/U-M anti-cocking flanges at the RF input and output and a female SMA connector for TTL control on the driver.



Features:

- Low Insertion Loss
- High Isolation

Applications:

- Radar Systems
- Communication Systems
- Sensors

Electrical Specifications:

| Parameter | Minimum | Typical | Maximum |
|---------------------------|---------|--------------------|---------|
| Frequency | 75 GHz | | 110 GHz |
| Insertion Loss | | 3.5 dB | |
| Isolation | 25 dB | 30 dB | |
| Maximum Input Power | | | +30 dBm |
| Control Signal | | TTL | |
| Switching Speed | | 100 ns | |
| Bias Voltage | | ±5 V _{DC} | |
| Bias Current | | 10 mA | |
| Specification Temperature | | +25°C | |
| Operating Temperature | 0°C | | +50°C |

Mechanical Specifications:

| Item | Specification |
|---------------|---|
| Input Port | WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange |
| Output Ports | WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange |
| Bias Ports | Feed Through Pins |
| TTL Control | SMA (F) |
| Case Material | Aluminum |
| Finish | Gold Plated |
| Weight | 0.8 Oz |
| Size | 1.10" (L) X 1.00" (W) X 0.83" (H) |
| Outline | KD-RWM-A-2 |







SPDT PIN Switch with TTL Driver, 75 to 110 GHz, Reflective

Insertion Loss & Isolation vs. Frequency

Bias: $\pm 5 V_{DC}/12 \text{ mA}$

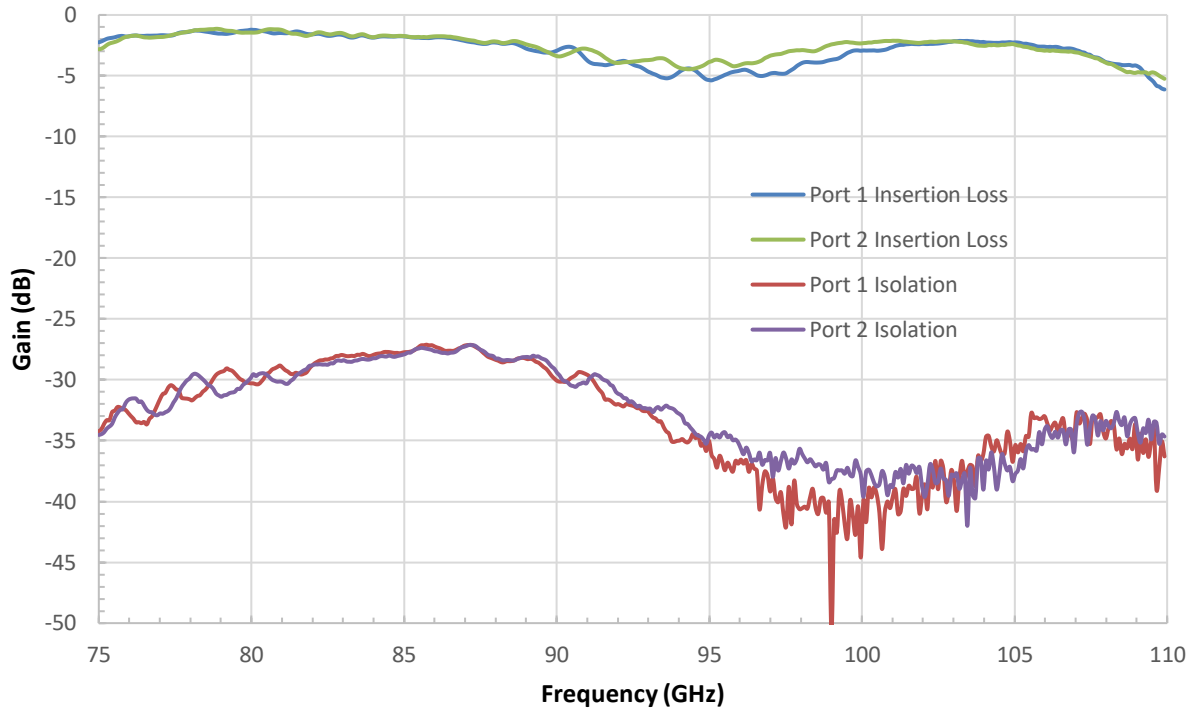

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

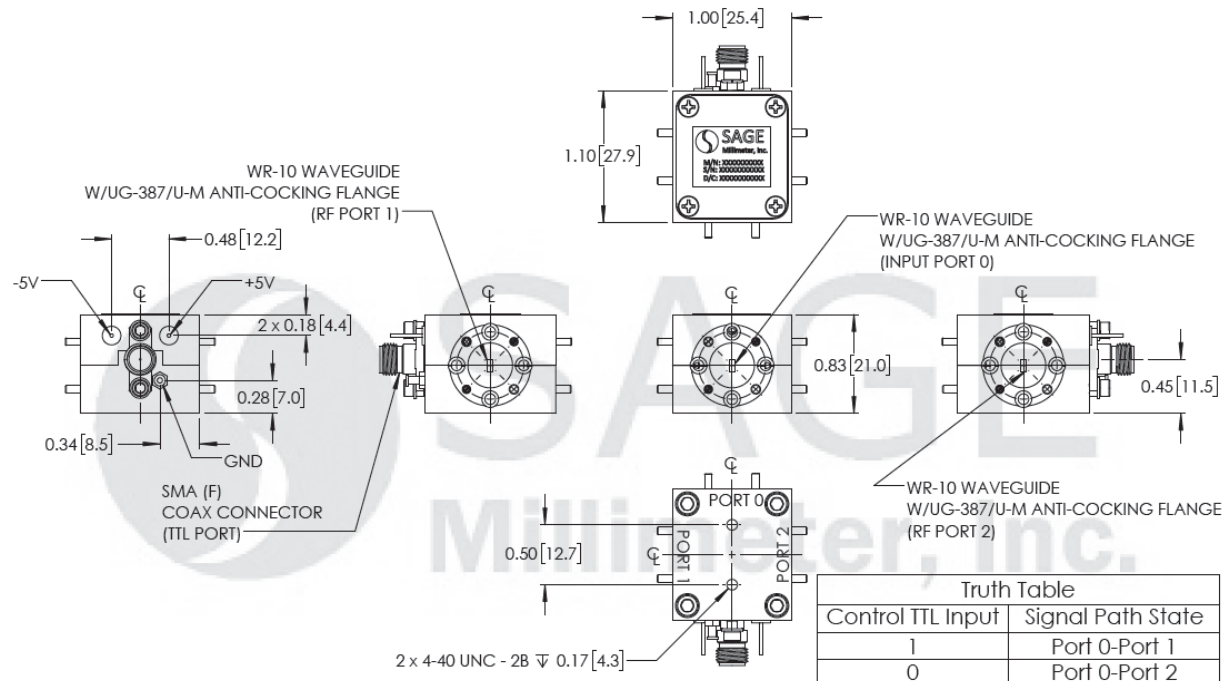



SPDT PIN Switch with TTL Driver, 75 to 110 GHz, Reflective

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit slightly.
- All testing was performed under +25 °C case temperature.
- Other mechanical configurations are available under different model numbers.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Exceeding absolute maximum ratings shown will damage the device.
- The switch is a static sensitive device. Always follow ESD rules when working with the switch.
- Any foreign objects in the waveguide will cause performance degradation and possible device damage.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**

