

AC Power Switchable Power Amplifier

S-Band: 3.1 - 3.5GHz

X-Band: 9 - 11GHz



Product Description

The RAMP0311GAD is reconfigurable dual-band (S- and X-Band) GaN power amplifiers (PAs), covering frequency band 2.7 - 3.9GHz and 9 - 11GHz. High Power Added Efficiency (PAE) 47% for S-Band, and 32% for X-Band.

The power output of this amplifier is 43dBm typical for both frequency band. The typical small signal gain is 49dB with a flatness of ± 3 dB. This excellent performance is achieved through the use of GaN devices. This power amplifier works with typically 110/220VAC power supply.

The power amplifier's input and output connectors are SMA.

Features

- Wideband EMC Solid State Power Amplifier
- Small Signal Gain 49dB Typical
- Output Saturation Power 43dBm Typical
- Supply Voltage 110/220 VAC
- 50 Ohm Matched Input/Output
- Overcurrent Protection

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications ($T_A = +25^\circ\text{C}$)

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		3 – 3.5			9 - 11		GHz
Small Signal Gain		49.1			44.5		dB
Gain Flatness		+/-3			+/-3		dB
Gain Variation Over Temperature (-40°C to +70°C)		+/-3			+/-3		dB
Input Return Loss		-12			-20		dB
*Output 1dB Compression Point (P1dB)		39			39		dBm
*Saturated Output Power (Psat)		43.6			43.5		dBm
Supply Current (Vcc = 110VAC)		0.35	2.2		0.35	2.2	A
3 rd Harmonics @ P1dB		-35			-60		dBc
RF ON and OFF Speed		80			80		us
Power Added Efficiency (PAE)		47			32		%
Weight			2.9				lbs.
Impedance			50				Ohms
Input / Output Connectors					SMA Female		
Package					Screw Sealed (Standard)		
					Hermetically Sealed (Optional)		

* P1dB, P3dB and Psat power test signal: 200 μ s pulse width with 10% duty cycle.

* For average CW power testing or increased duty cycle, a 5dB back off from Psat is required.

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	110VAC to 220VAC
*RF Input Power (RFIN)	Psat – Large Signal Gain

Bias Up Procedure

1. Connect input and output with 50 Ohm source/load.
(In band VSWR < 1.9:1 or >10dB return loss.)

2. Connect Power Cable

3. Turn On Back Panel AC Power Supply Switch

4. Press Front Panel Power Switch to Power Display

Bias Down Procedure

1. Press Front Panel Power Switch to Power Off Display

2. Turn Off Back Panel AC Power Supply Switch

3. Remove Power Cable (If Moving Equipment)

4. Disconnect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-30°C to +70°C (Ambient Temperature)
Storage Temperature	-55°C to +125°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +70°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.


**For vibration testing details please see additional information section.

Typical Performance Plots

Gain 2.7GHz to 3.9GHz

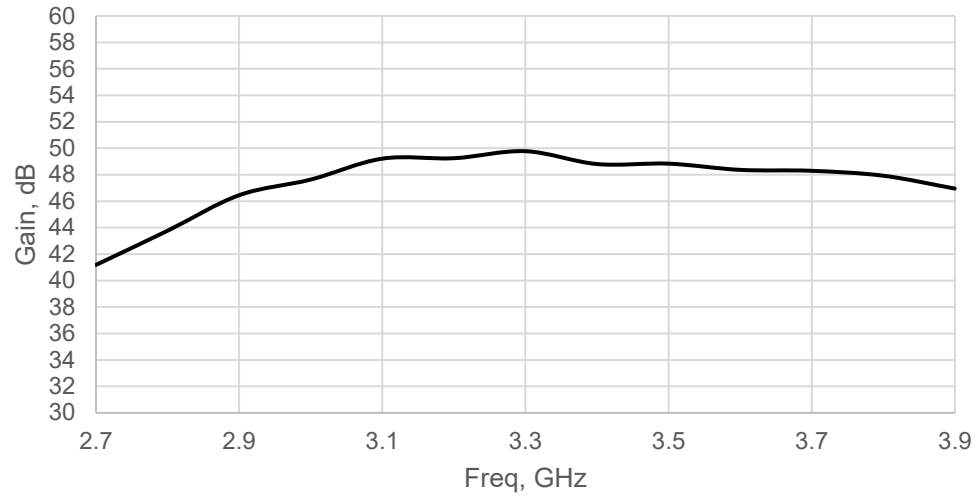


Gain 8GHz to 12GHz

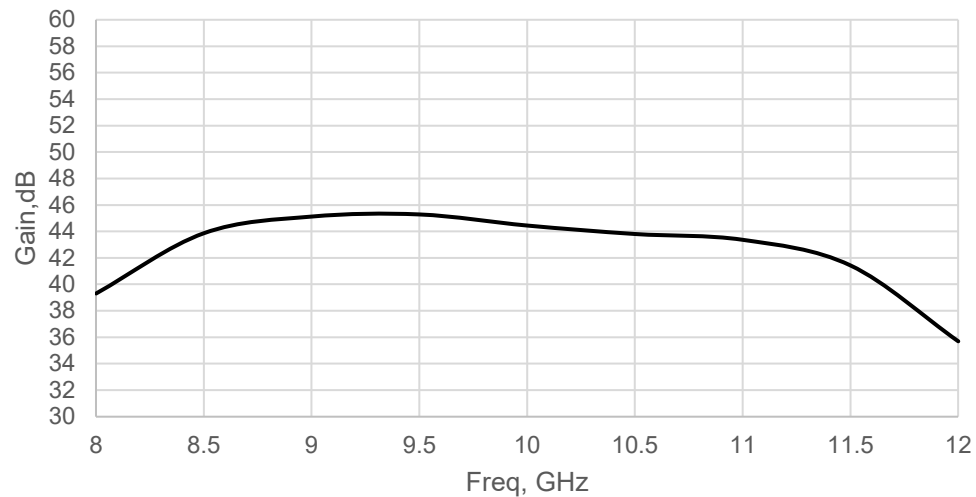


Typical Performance Plots

Psat 2.7GHz to 3.9GHz

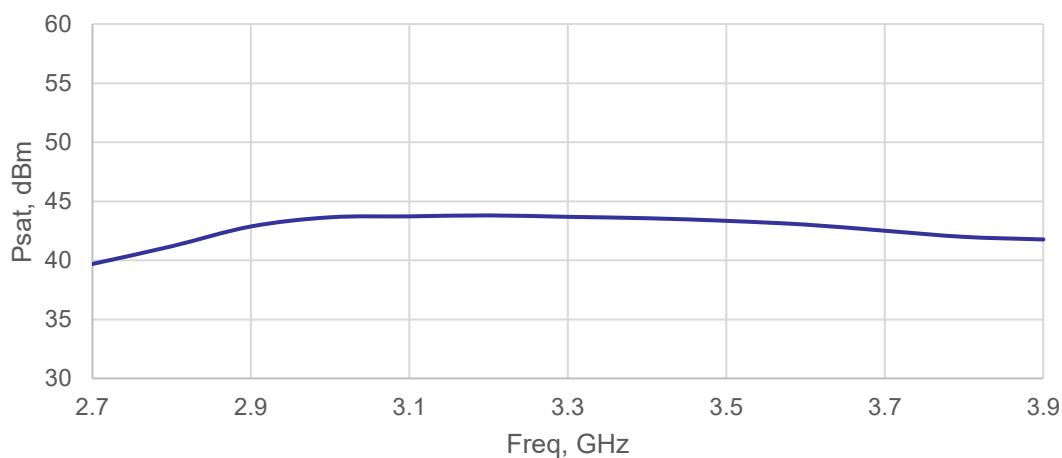

Psat 8GHz to 12GHz

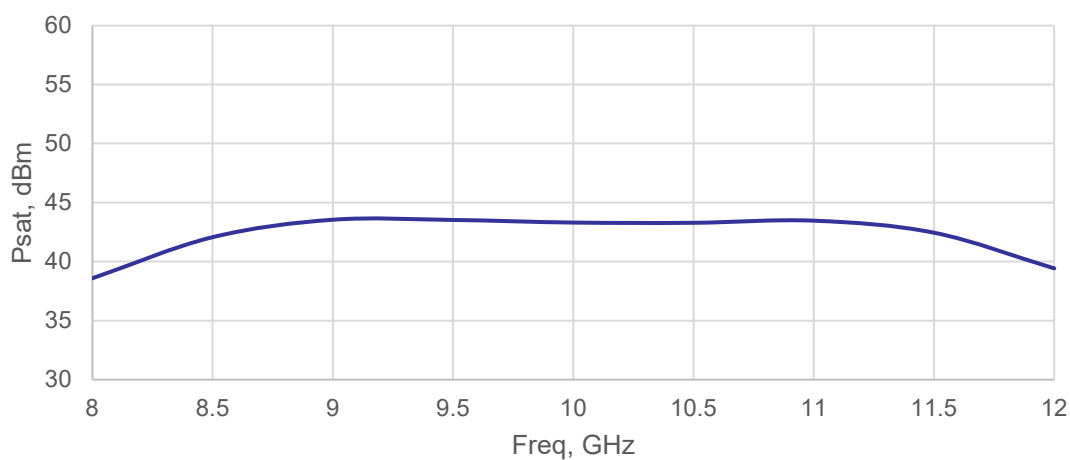

Protection Connector Table

Female D-Sub on the housing
 Part Number: 173-E15-213R001


Pin #	Name	Function	Initial State	Description	Applied
1	Reset	Control		Resets PA when logic <u>LOW</u> is applied and released	Yes
2	Drain Disable	Control	LOW	Applying logic <u>HIGH</u> disables drains of amplifiers	Yes
3	Gate Disable	Control	LOW	Applying logic <u>HIGH</u> disables gates of amplifiers	Yes
4	Frequency Selection	Control	LOW	Applying logic <u>HIGH</u> to select X-Band Operation Applying logic <u>LOW</u> to select S-Band Operation	Yes
5	Temp Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when amplifier is driven over temperature	Yes
6	Current Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when drain current limit is reached	Yes
7	ID Imbalance	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> when an imbalance in the drain current of the combining branches occurs	No
8	GND	Ground	GND	Ground	Yes
9	VDC	VDC	NA	Power Supply for Amplifier	Yes
10	VDC	VDC	NA	Power Supply for Amplifier	Yes
11	VDC	VDC	NA	Power Supply for Amplifier	Yes
12	Temp Signal	Indicator	NA	PA carrier case temperature is represented by voltage	Yes
13	+5V	Power Supply	+5V	+5V DC is supplied for reference	Yes
14	GND	Ground	GND	Ground	Yes
15	GND	Ground	GND	Ground	Yes

Notes:

- HIGH/LOW voltages are standard TTL signals 0.0V-0.8V = LOW. 2V-5V = HIGH. Input current is 10uA.
- Matching connector and cable will be shipped with the product.
- Applied=Yes means the feature is included. Applied=No means the feature is not included with this model.
- 5V reference supply can source 700mA.
- Indicator output signals can source 24mA.


Outline Drawing

All dimensions are in millimeters [inches]

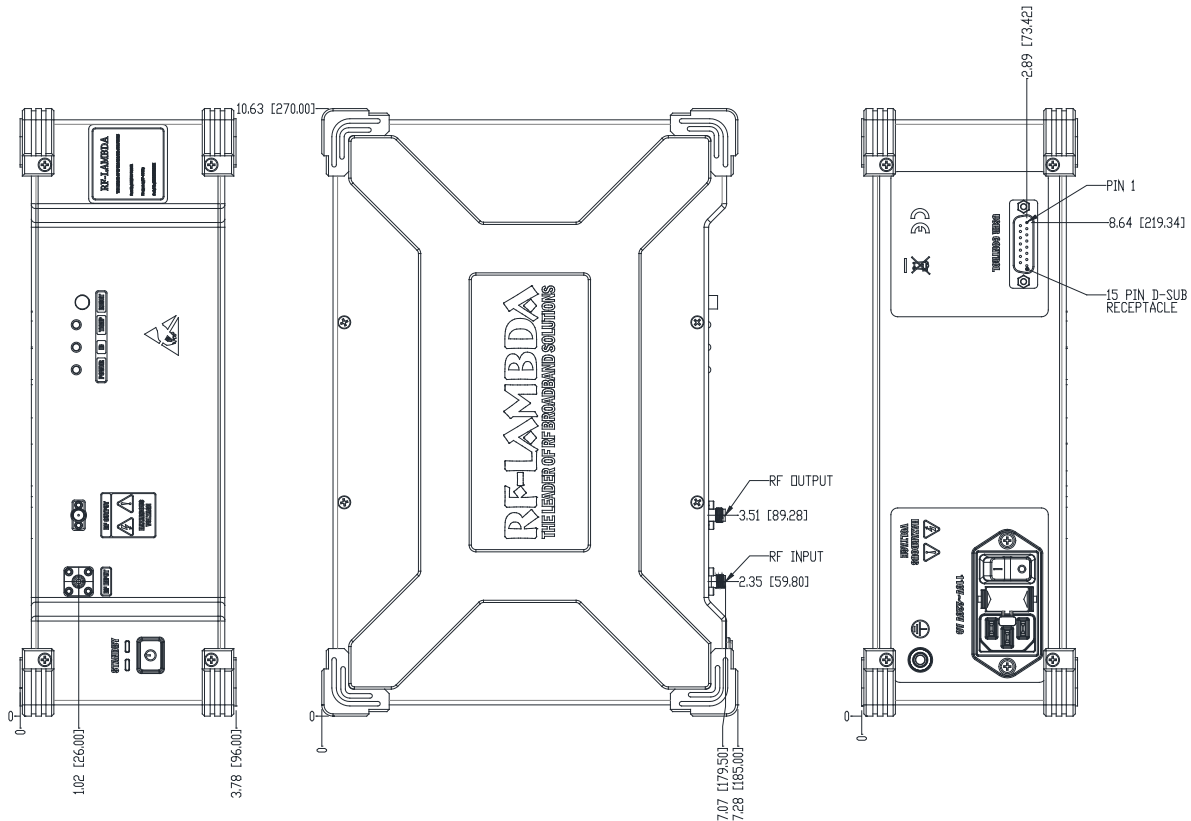

Notes:

1. Package Material: Aluminum and Copper
2. Plating: Black
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.2 [0.008] unless otherwise specified.
5. Heat sink required during operation (sold separately). Matching heatsink is listed on our website. If customer would like to use their own cooling method, please make sure the amplifier will operate under the specs that listed in page 2 of this datasheet.



Additional Information

Documentation

Webpage

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Heatsink Lookup Specifications

https://rflambda.com/search_heatsink.jsp

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RAMP0311GAD	Input connector SMA and Output connector SMA	AC Power S, X Dual Band 3.1-3.5GHz & 9-11GHz Switchable Power Amplifier



Each amplifier is shipped in a well protected package.

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.