


Main Specifications

Impedance: 50Ω
 Frequency range: DC~18GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 1000V
 Durability: ≥500


Material/Plating

Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PTFE & PEI

TNCA(m) to TNCA(m)

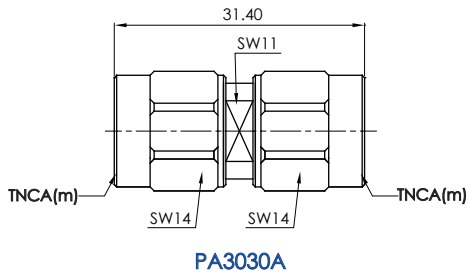

TNCA(f) to TNCA(f)

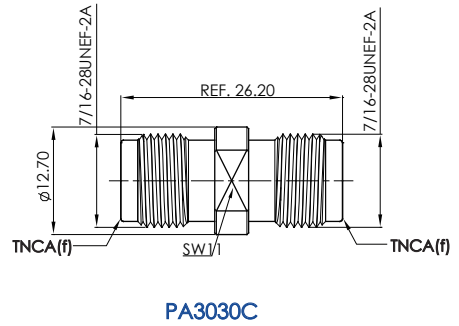


Main Specifications

Impedance: 50 Ω
 Frequency range: DC~18GHz
 VSWR: ≤ 1.15
 Dielectric withstanding voltage (V.R.M.S.): 1000V
 Durability: ≥ 500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PTFE & PEI

N(m) to N(m)

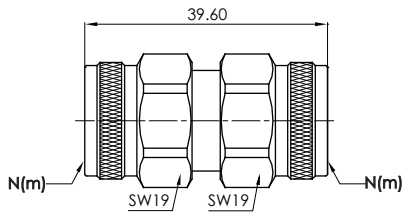


PA5151A

N(m) to N(f)

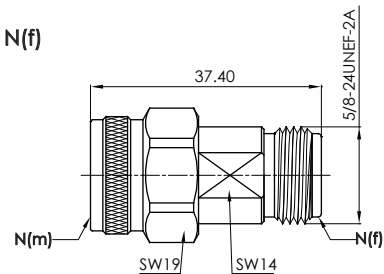


PA5151B

N(f) to N(f)






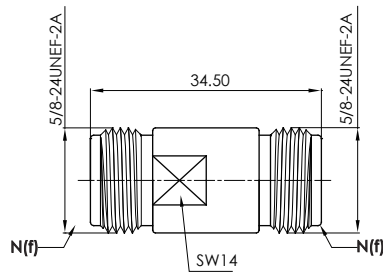


PA5151C

N(f) Waterproof to N(m) 4 Hole Flange

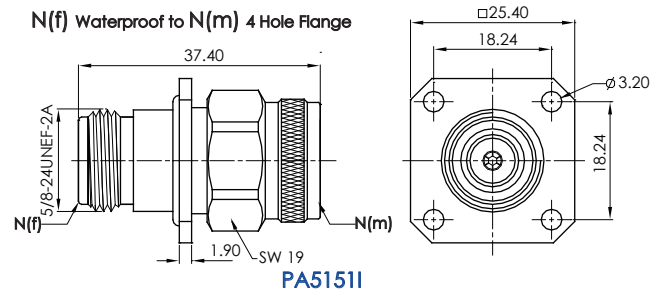

PA5151I
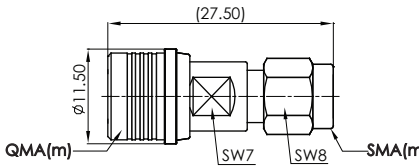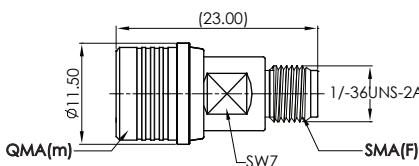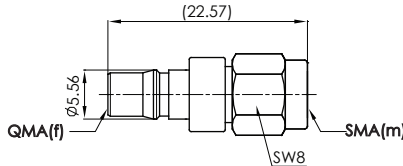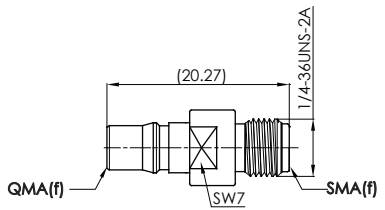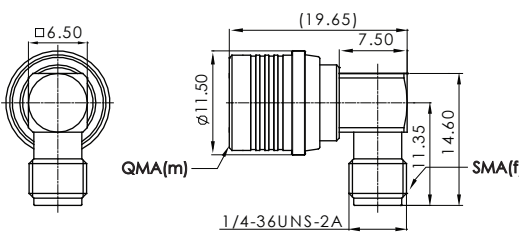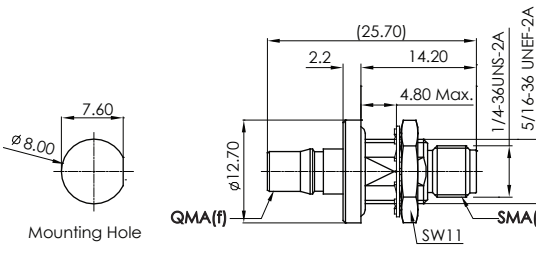
<p>Main Specifications</p> <p>Impedance: 50Ω</p> <p>Frequency range: DC~18GHz</p> <p>Dielectric withstanding voltage(V.R.M.S.): 1000V</p> <p>Durability: ≥500</p> <p>VSWR: ≤1.15 @ DC~6GHz ≤1.30 @ 6~18GHz</p>	<p>Material/Plating</p> <p>Body: Brass Albaloy</p> <p>Center Conductor: Brass/Beryllium copper Gold</p> <p>Insulators: PTFE</p>
<p>QMA(m) to SMA(m)</p>  <p style="text-align: center; color: blue;">ANO261-211-1029</p>	<p>QMA(m) to SMA(f)</p>  <p style="text-align: center; color: blue;">ANO261-212-1031</p>
<p>QMA(f) to SMA(m)</p>  <p style="text-align: center; color: blue;">ANO262-211-1032</p>	<p>QMA(f) to SMA(f)</p>  <p style="text-align: center; color: blue;">ANO262-212-1030</p>
<p>Right Angle QMA(m) to SMA(f)</p>  <p style="text-align: center; color: blue;">ANO261-212-2132</p>	<p>QMA(f) to Waterproof Bulkhead SMA(f)</p>  <p style="text-align: center; color: blue;">ANO262-212-1070-1</p>

DC -18 GHz N To 2.4mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~18GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage (V.R.M.S.): 1000V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

N(m) to 2.4mm(m)

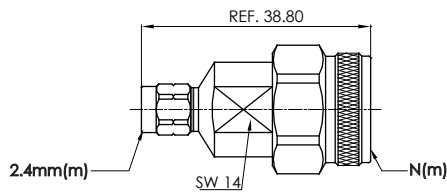


PA5122A

N(m) to 2.4mm(f)

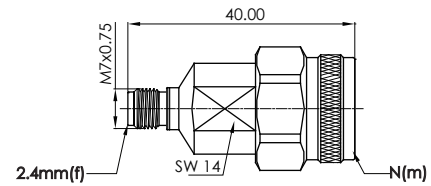


PA5122B

N(f) to 2.4mm(f)

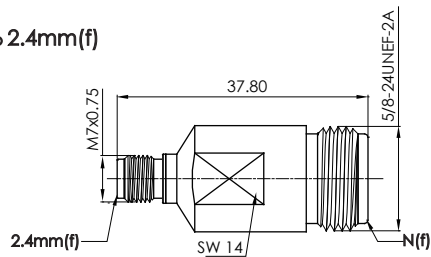

PA5122C

N(f) to 2.4mm(m)

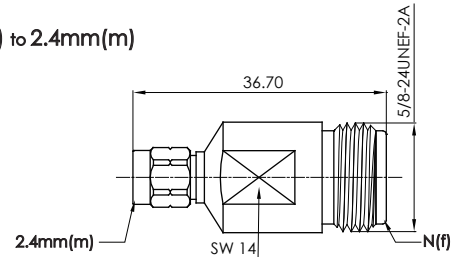

PA5122D


Main Specifications

Impedance: 50Ω
 Frequency range: DC~18GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage (V.R.M.S.): 1000V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

N(m) to 2.92mm(m)

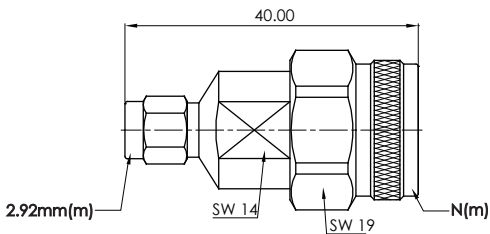


PA5129A

N(m) to 2.92mm(f)

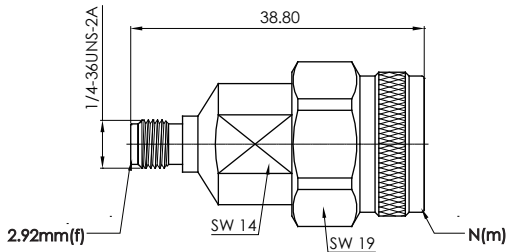


PA5129B

N(f) to 2.92mm(f)

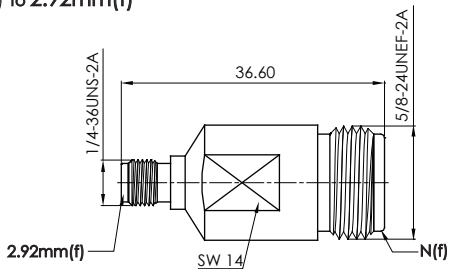

PA5129C

N(f) to 2.92mm(m)

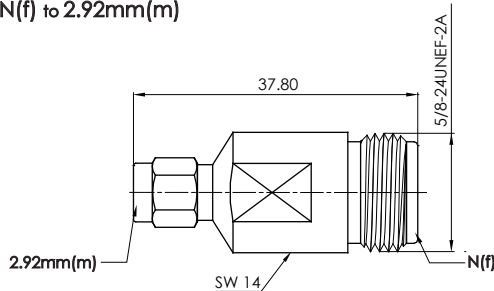

PA5129D

DC -18 GHz N To 3.5mm Adapters




Main Specifications

Impedance: 50 Ω
 Frequency range: DC~18GHz
 VSWR: ≤ 1.15
 Dielectric withstanding voltage (V.R.M.S.): 1000V
 Durability: ≥ 500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

N(m) to 3.5mm(m)

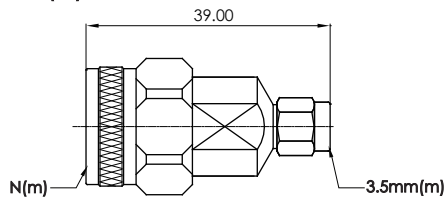


PA5125A

N(m) to 3.5mm(f)

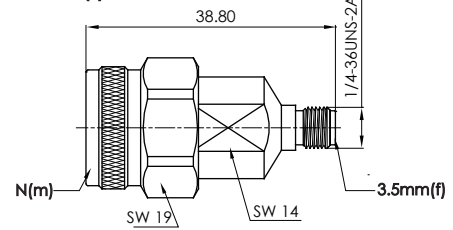


PA5125B

N(f) to 3.5mm(f)

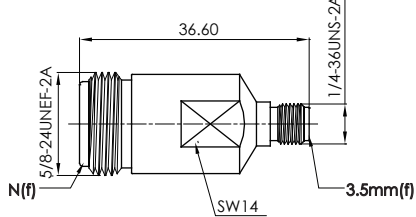

PA5125C

N(f) to 3.5mm(m)

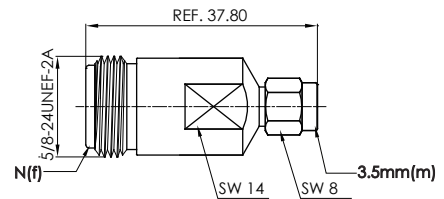

PA5125D


Main Specifications

Impedance: 50 Ω
 Frequency range: DC~18GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 1000V
 Durability: ≥500


Material/Plating

Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI


N(m) to SMA(m)

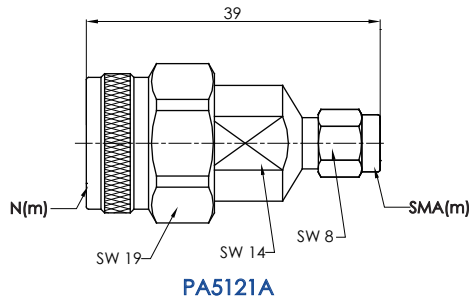

N(m) to SMA(f)

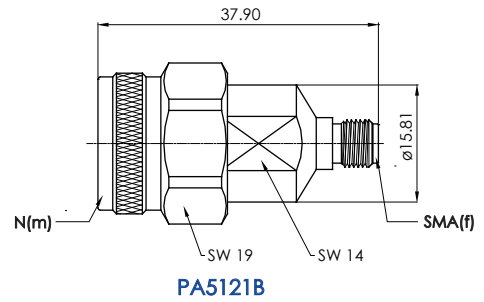

N(m) to SMA(m)

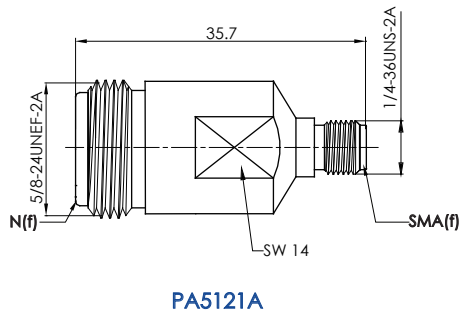

N(m) to SMA(f)

