

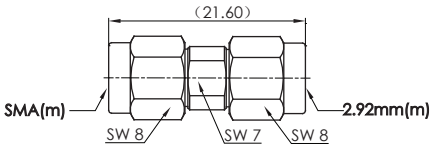
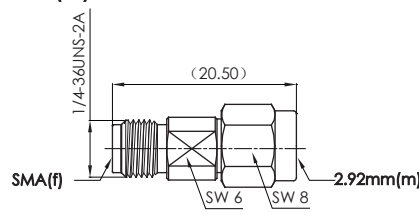






DC-27 GHz SMA to 2.92mm Adapters

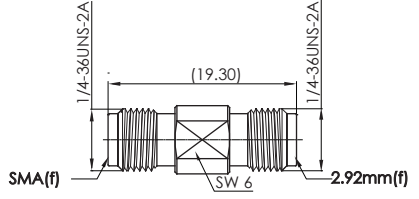

<p>Main Specifications</p> <p>Impedance: 50Ω</p> <p>Frequency range: DC~27GHz</p> <p>VSWR: ≤1.10 @ DC~18GHz ≤1.15 @ 18~27GHz</p> <p>Dielectric withstanding voltage(V.R.M.S.): 1000V</p> <p>Durability: ≥500</p>	<p>Material/Plating</p> <p>Body: Stainless steel Passivated</p> <p>Center Conductor: Beryllium copper Gold</p> <p>Insulators: PTFE&PEI</p>
<p>SMA(m) to 2.92mm(m)</p>  <p style="text-align: center;">PA2921A</p>	<p>SMA(f) to 2.92mm(m)</p>  <p style="text-align: center;">PA2921B</p>
<p>SMA(f) to 2.92mm(f)</p>  <p style="text-align: center;">PA2921C</p>	<p>SMA(m) to 2.92mm(f)</p>  <p style="text-align: center;">PA2921D</p>

DC-27 GHz 3.5mm to SMA Adapters

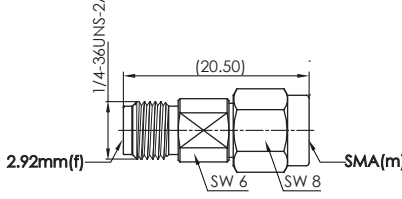
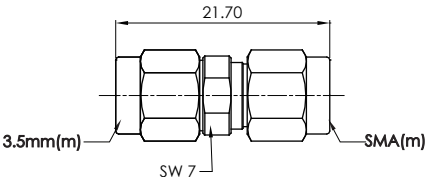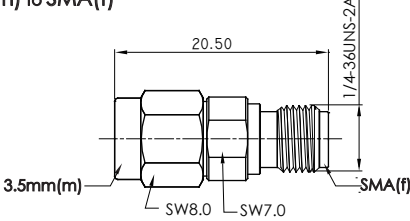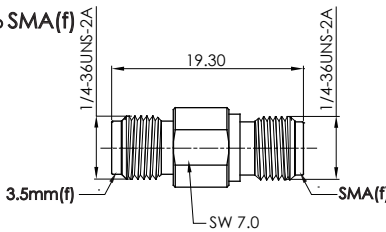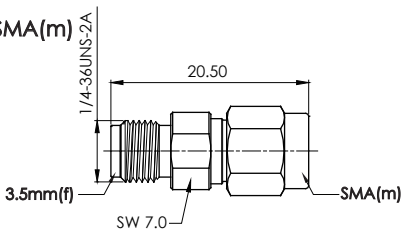
<p>Main Specifications</p> <p>Impedance: 50Ω</p> <p>Frequency range: DC~27GHz</p> <p>VSWR: ≤1.15</p> <p>Dielectric withstanding voltage(V.R.M.S.): 1000V</p> <p>Durability: ≥500</p>	<p>Material/Plating</p> <p>Body: Stainless steel Passivated</p> <p>Center Conductor: Beryllium copper Gold</p> <p>Insulators: PTFE & PEI</p>
<p>3.5mm(m) to SMA(m)</p>  <p>PA2521A</p>	<p>3.5mm(m) to SMA(f)</p>  <p>PA2521B</p>
<p>3.5mm(f) to SMA(f)</p>  <p>PA2521C</p>	<p>3.5mm(f) to SMA(m)</p>  <p>PA2521D</p>
Empty space for additional specifications or notes	