

DC-50 GHz 2.4mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~50GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 750V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

2.4mm(m) to 2.4mm(m)

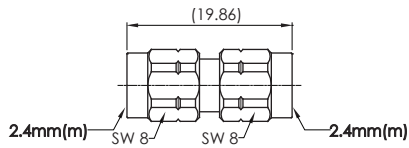


PA2222A

2.4mm(m) to 2.4mm(f)

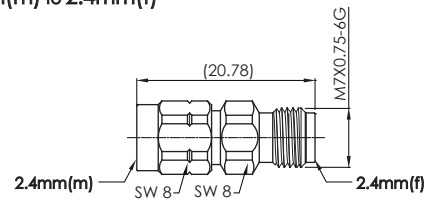


PA2222BA

2.4mm(f) to 2.4mm(f)

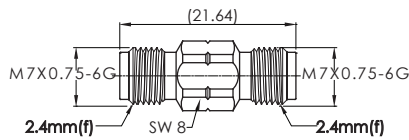

PA2222CA

2.4mm(f) to 2.4mm(f) Bulkhead

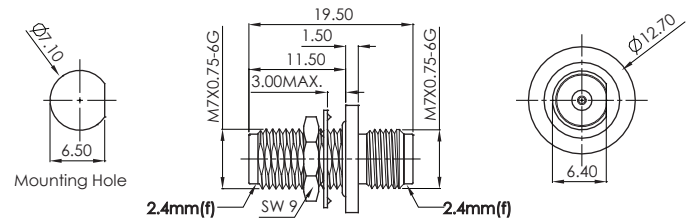

PA2222E

DC-50 GHz 2.4mm to 1.85mm Adapters




Main Specifications

Impedance: 50Ω
 Frequency range: DC~50GHz
 VSWR: ≤1.15
 Dielectric withstanding voltage(V.R.M.S.): 750V
 Durability: ≥500

Material/Plating


Body: Stainless steel Passivated
 Center Conductor: Beryllium copper Gold
 Insulators: PEI

2.4mm(m) to 1.85mm(m)

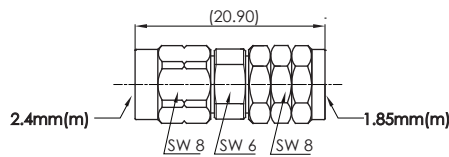


PA6222A

2.4mm(f) to 1.85mm(m)

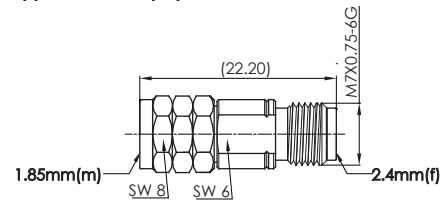


PA6222B

2.4mm(f) to 1.85mm(f)

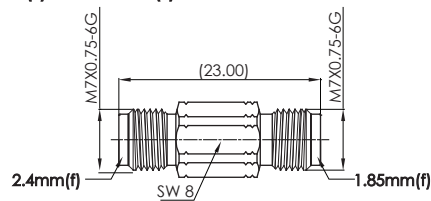

PA6222C

2.4mm(m) to 1.85mm(f)

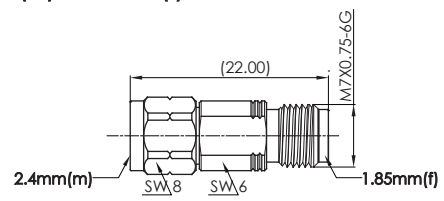


PA6222D

DC-50 GHz
NMD2.4mm Adapters




NMD2.4mm(f) to 2.4mm(f)

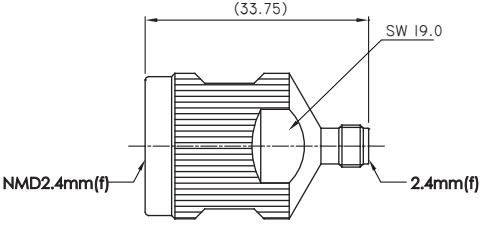


PA6822C

NMD2.4mm(f) to 2.92mm(f)

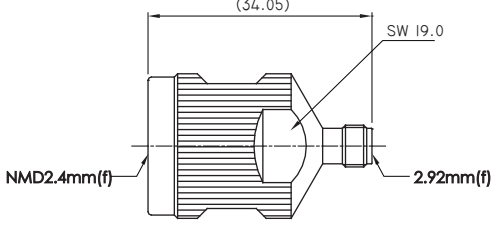


PA6829C

NMD2.4mm(f) to NMD2.92mm(m)

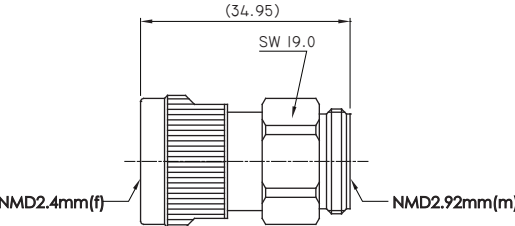

PA6864B

NMD2.4mm(f) to NMDmm(m)

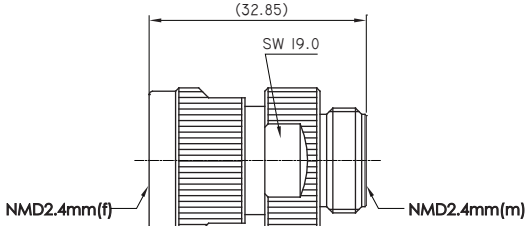

PA6868B