

Ultra Wide Band Benchtop AC Power Amplifier 18GHz~47GHz



Features

- Solid State Power Amplifier
- Gain: 52dB Typical
- Output Power: +31.5dBm Typical
- Convenient AC power supply

Typical Applications

- Wireless Infrastructure
- Military and Aerospace
- Test and Measurement

Electrical Specifications, $T_A = +25^\circ\text{C}$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	18 – 30			30 – 47			GHz
Gain		50			48		dB
Gain Flatness		±7			±5		dB
Gain Variation Over Temperature (-45 ~ +85)		±3			±3		dB
Noise Figure		13			13		dB
Input Return Loss		9			8		dB
Output Return Loss		10			10		dB
Output 3dB Compression Point (P3dB)		31.5			31.5		dBm
Output Third Order Intercept (IP3)		34			33		dBm
Supply Current	250						mA
Isolation S12	79	85		76	86		dB
Input Max Power (No Damage)	Psat – Gain			Psat – Gain			dBm
Weight	1000						g
Impedance	50						Ohms
Input / Output Connectors	2.4mm-Female (2.92mm female optional)						
Finish	Black Paint						
Material	Aluminum / Copper						

* P1dB, P3dB and Psat power test signal: 200 μ s pulse width with 10% duty cycle.

* For average CW power testing or increased duty cycle, a 5dB back off from Psat is required unless water/oil cooling system is applied.

Absolute Maximum Ratings	
Supply Voltage	110~220VAC
RF Input Power (RFIN) Pin_max = Psat - Gainsat	Psat – Gain

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves

Biasing Up Procedure	
Step 1	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 2	Turn on AC power
Step 3	Enable RF output
Power OFF Procedure	
Step 1	Turn off RF output power
Step 2	Turn Off AC power
Step 3	Disconnect input and output

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-45°C~+55°C (Case Temperature less than +85°C)
Storage Temperature	-50°C~+125°C
Thermal Shock	-45°C → +85°C (5 Cycles / 10 hours)
Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Ordering Information	
Part No	Description
RAMP18G47GD	18GHz~47GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.


Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?


Each RF - Lambda amplifier will go through power and temperature stress testing. Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Typical Performance Plots


Gain

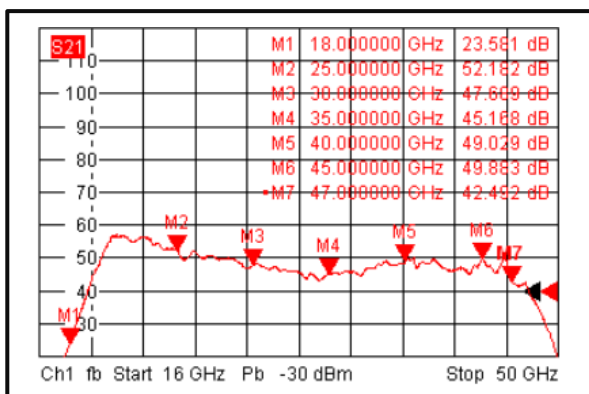


Input Return Loss

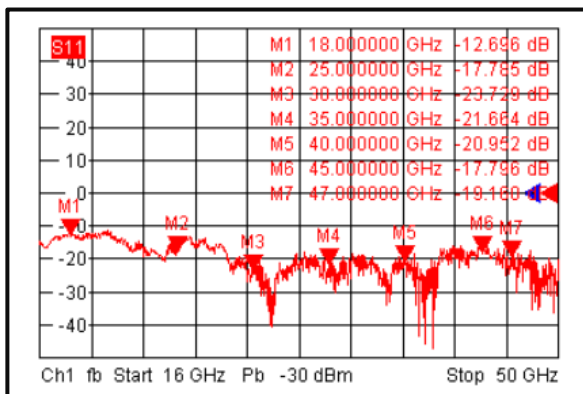

Isolation


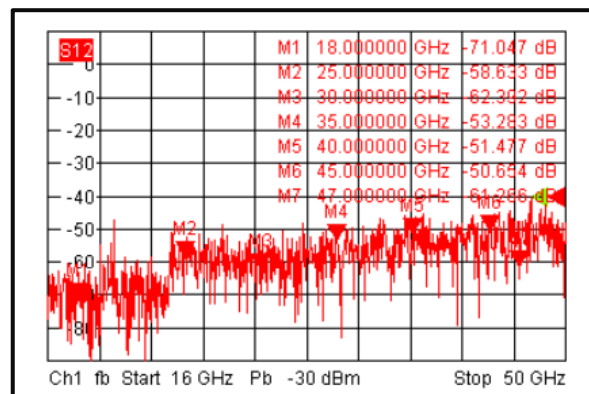


Output Return Loss

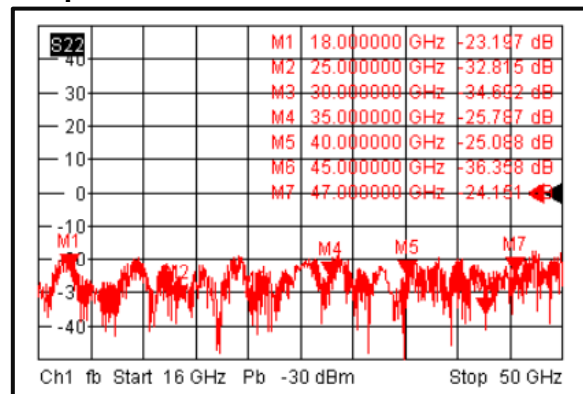


Note: Input/output return loss measurements include attenuators to protect equipment


Gain vs. Output Power

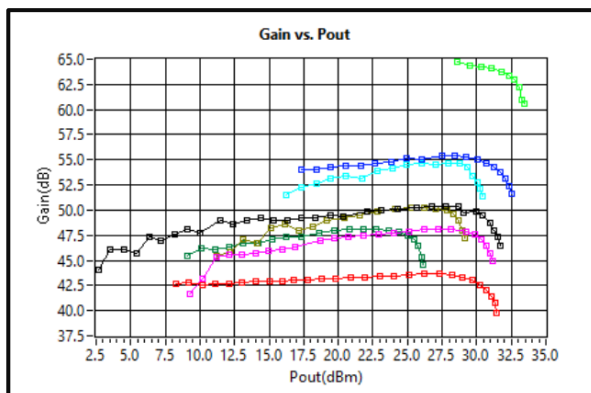

Pin vs. Pout

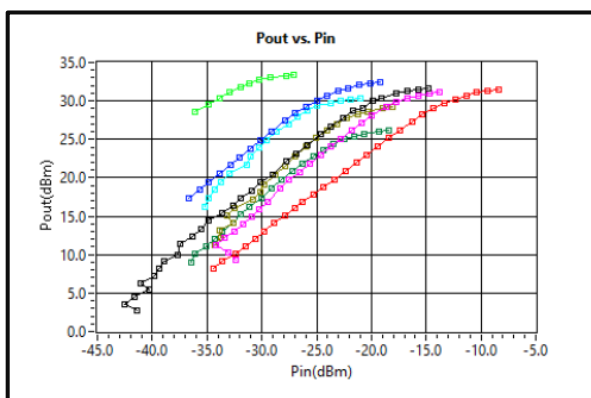


Saturation Power vs. Frequency

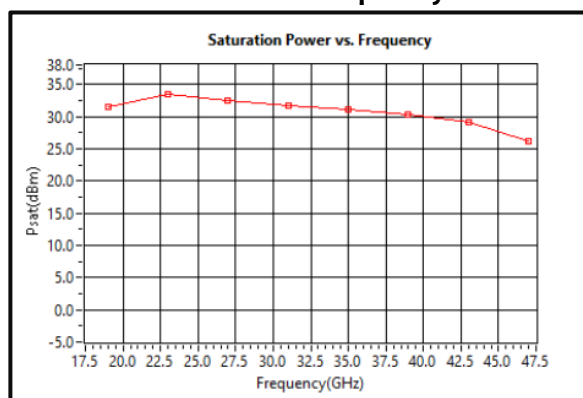

Outline Drawing:

All Dimensions in mm

Tolerances ± 0.1

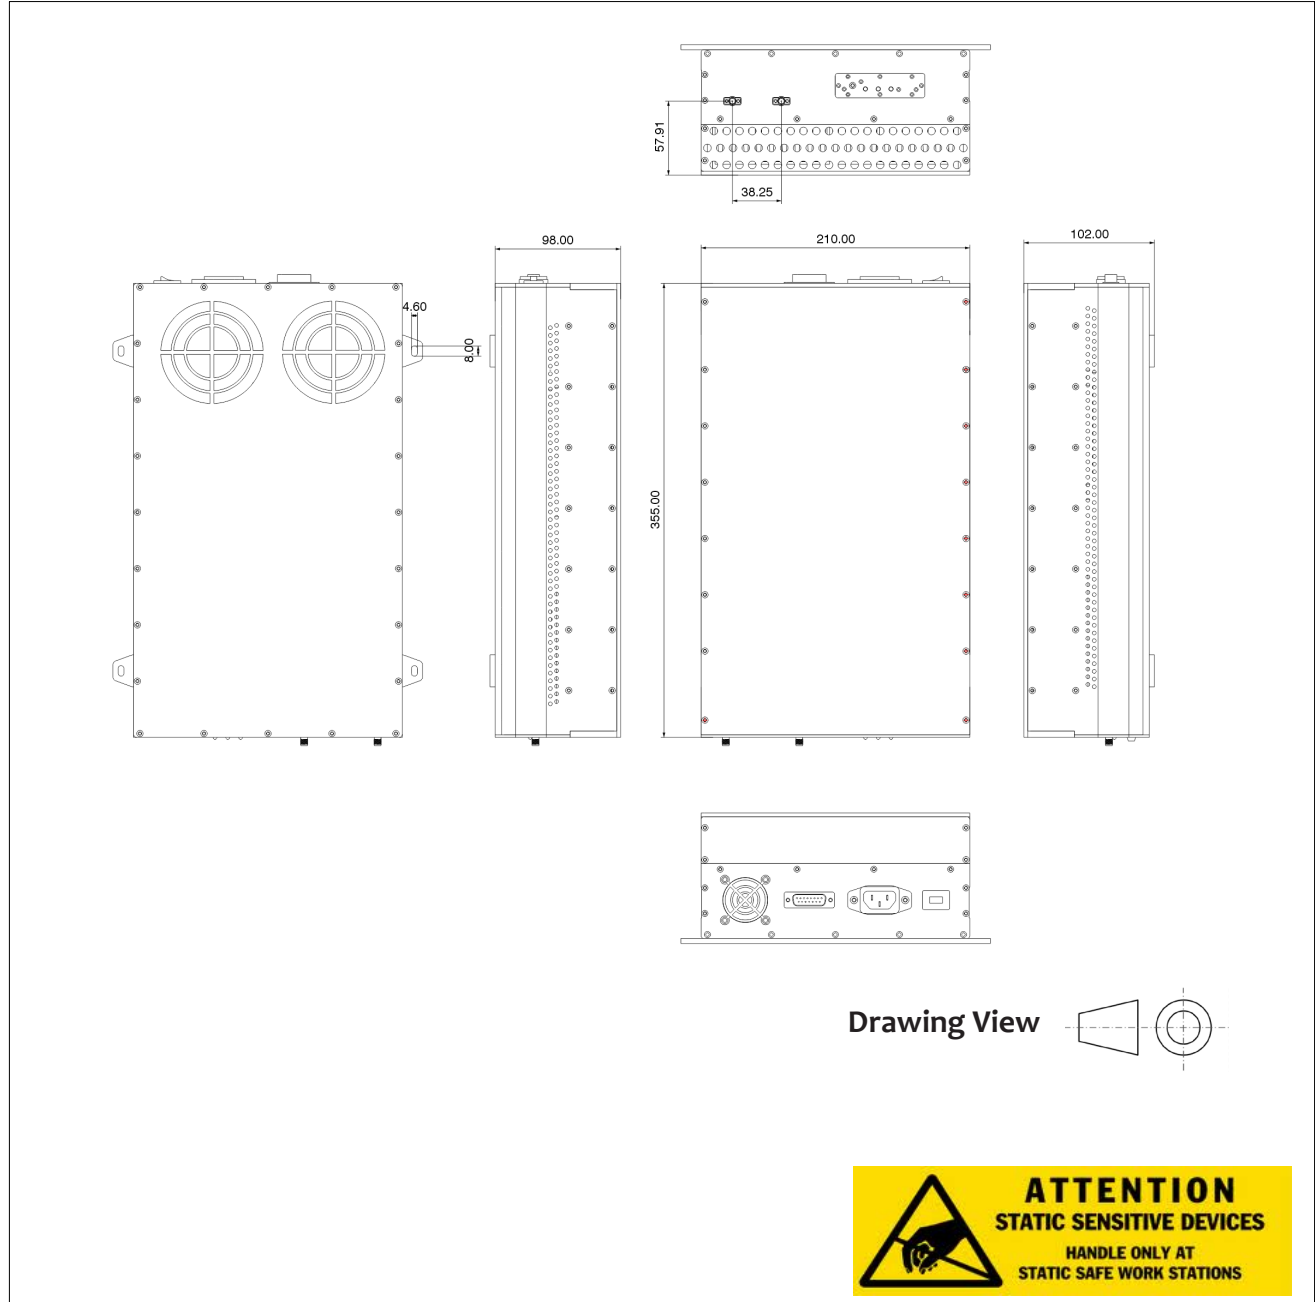

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.