

DAT60KUL – 22GHz LOW-LOSS DIGITAL WIDEBAND MICROWAVE ATTENUATOR







The industry standard in affordable stand-alone digital RF attenuators!

Features List

Max input power: +26.0dBm


Attenuation: 0-60dBStep Size: 0.5dB

Frequency: 1GHz – 22GHzInsertion loss: < 10dB Typical

Dimensions: 2.75" x 1.25" x 2.15"

Differsions, 2.75 x 1.25 x 2.15

- Premium gold microwave SMA connectors
- Micro-USB powered and controlled (virtual COM serial port - 115.2Kbps)
- Manual controls and display for standalone usage
- Aggressive pricing for unbeatable value in RF test environments
- Audio, LED, and OLED display user feedback
- Simple control GUI for PC host
- Optional Ethernet connection
- 6GHz and 12GHz models also available

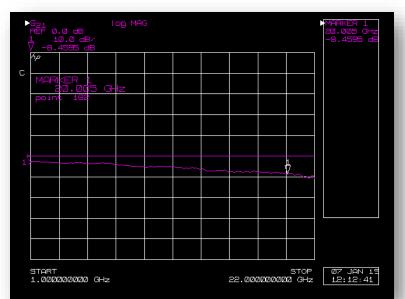



More information: www.dsinstruments.com/downloads/





