

Wideband Power Amplifier 2GHz-6GHz



Product Description

RFLUPA02G06GC-B is a wideband power amplifier with a frequency range of 2 to 6GHz.

The power output of this amplifier is 51dBm typical. The typical small signal gain is 60dB with a gain variance of ± 8 dB. This excellent performance is achieved by using GaN devices.

The power amplifier's input connector is SMA, and output is a N-Type connector.

The operating temperature of this product is within -40 to +85°C.

Features

- Wideband Solid State Power Amplifier
- Small Signal Gain 60dB Typical
- Output Saturation Power 51dBm Typical
- Supply Voltage +48VDC
- 50 Ohm Matched Input/Output
- Drain Overvoltage Protection
- Drain Overcurrent Protection

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications ($T_A = +25^\circ\text{C}$)

Parameter	Min	Typ	Max	Units
Frequency Range		2 – 6		GHz
Small Signal Gain		60		dB
Gain Variance		+/-8		dB
Gain Variation Over Temperature (-40°C to +70°C)		+/-3		dB
Input Return Loss		-7		dB
*Saturated Output Power (Psat)		51		dBm
Supply Current ($V_{CC} = +48\text{VDC}$)		2	11.5	A
IM3		-28		dBc
RF Off Speed		500		nS
RF On Speed		2		uS
Power Added Efficiency (PAE)		20		%
Weight		6.6		lbs.
Impedance		50		Ohms
Input / Output Connectors		SMA / N-Type Female		
Package		Screw Sealed (Standard)		
		Hermetically Sealed (Optional)		

Note: Special screening is available with extra cost. Please inquire with sales.

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	+45VDC to +49.5VDC
*RF Input Power (RFIN)	Psat – Large Signal Gain

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load.
(In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure

1. Turn off power supply
2. Remove positive supply Connection
3. Remove RF Connection
4. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +75°C (Case Temperature)
Storage Temperature	-55°C to +125°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Notes:


- Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.
- For vibration testing details please see additional information section

Typical Performance Plots


Input Return Loss @+25°C

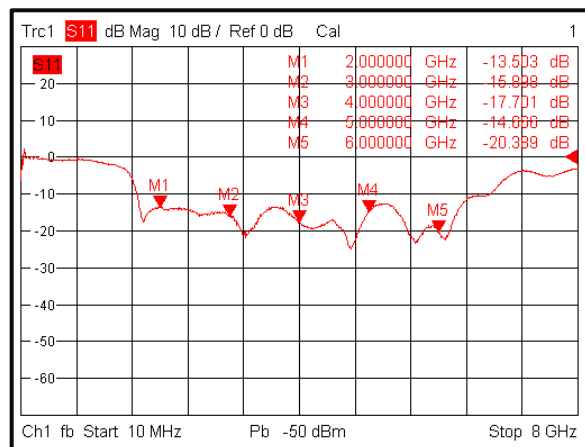


Gain vs. Frequency @+25°C

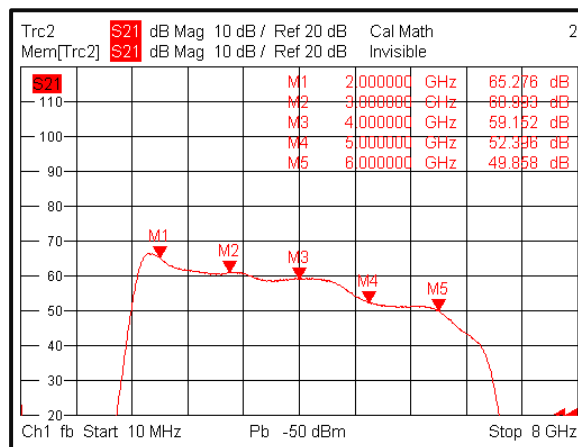


Input Return Loss @+85°C

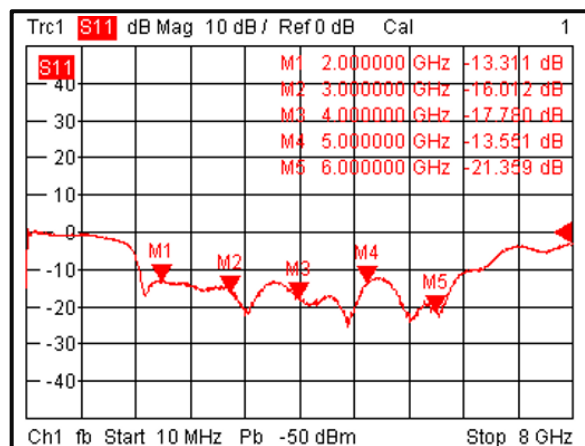


Gain vs. Frequency @+85°C

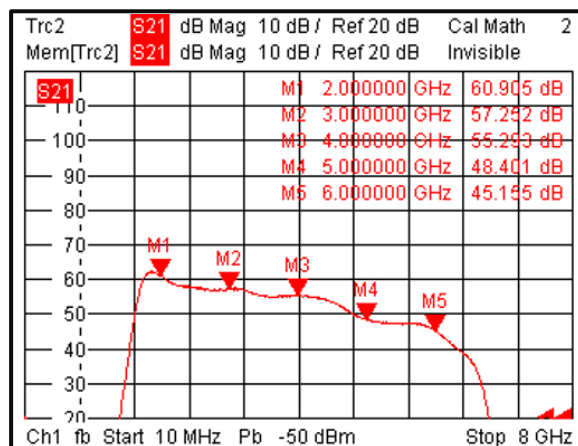

Input Return Loss @-40°C

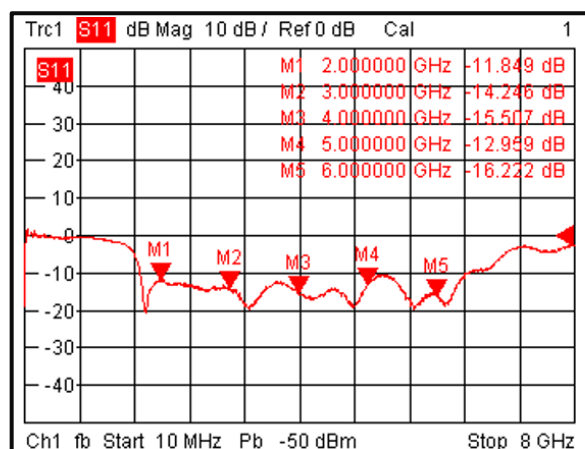


Gain vs. Frequency @-40°C

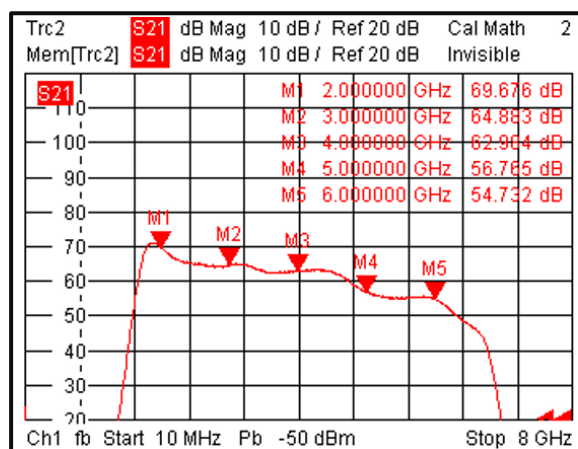


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain vs Output Power CW

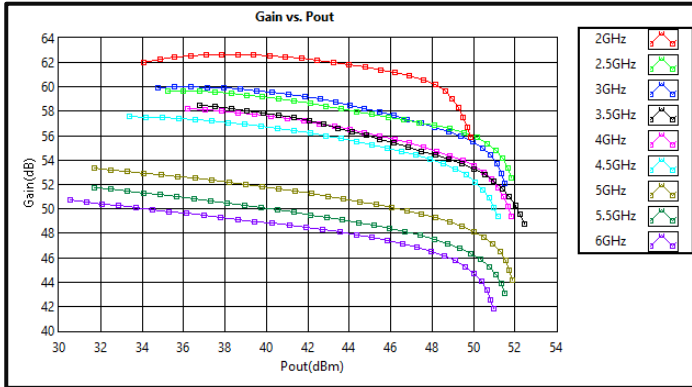


Gain vs Output Power *Pulse

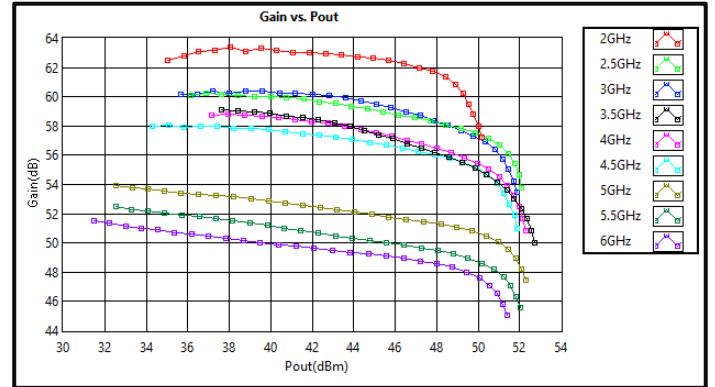


Output vs Input Power CW

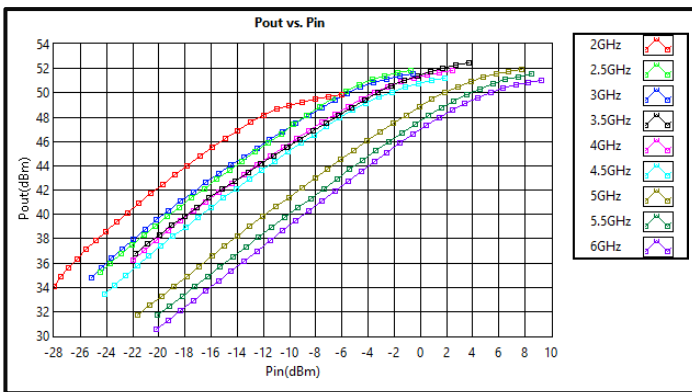


Output vs Input Power *Pulse

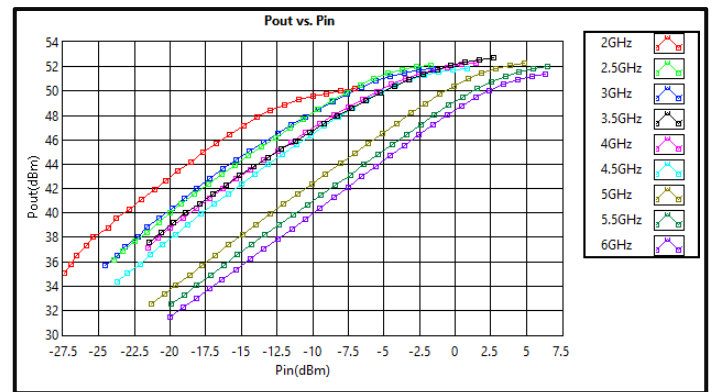

PxdB vs Frequency CW

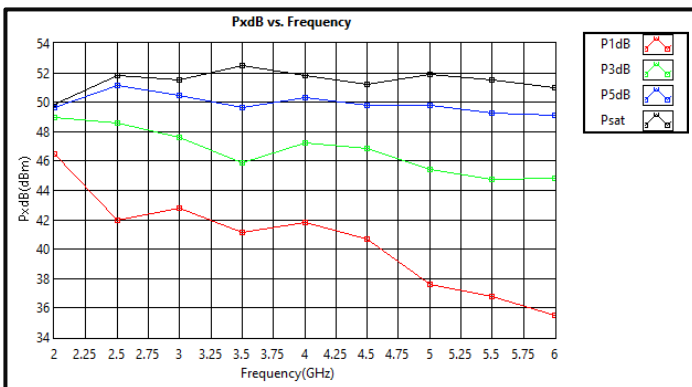


PxdB vs Frequency *Pulse

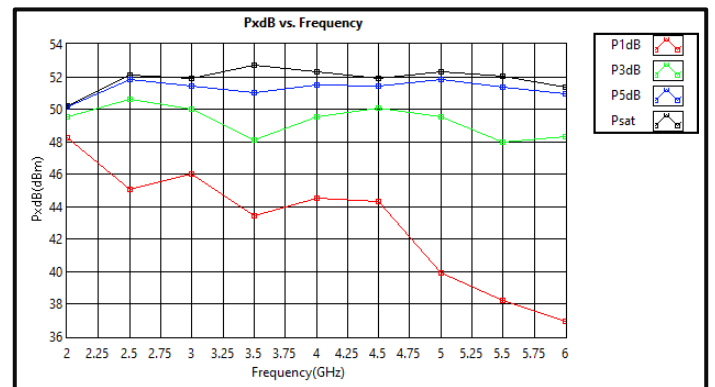


*Pulse Psat power test signal: 200μs pulse width with 10% duty cycle.

Typical Performance Plots


Left IM3 vs Output Power

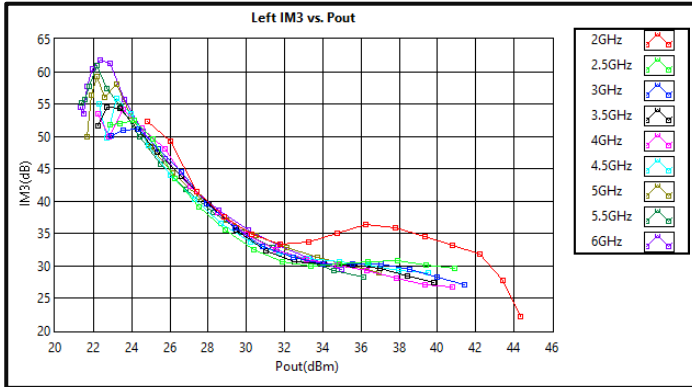


Right IM3 vs Output Power

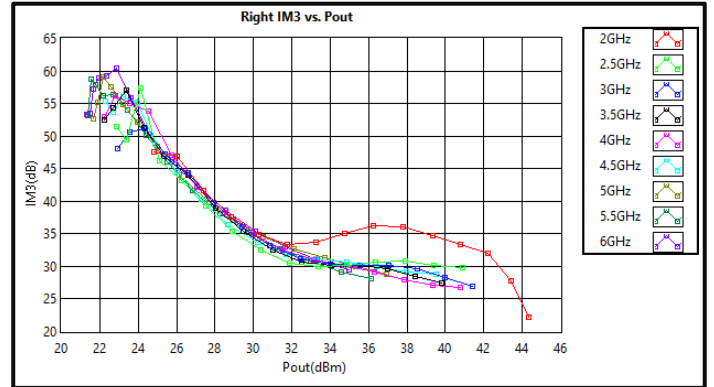


Delta IM3 vs Output Power

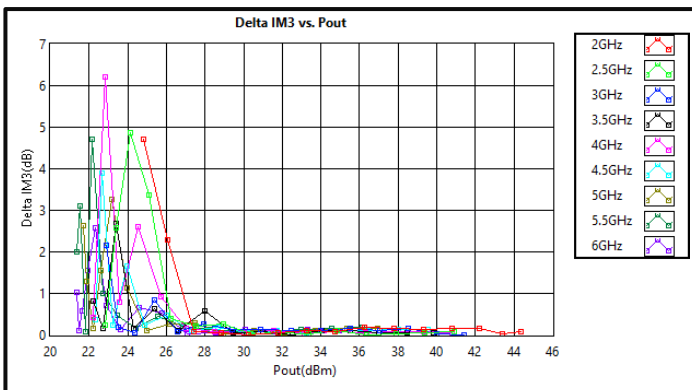


Current vs Output Power (+48VDC)

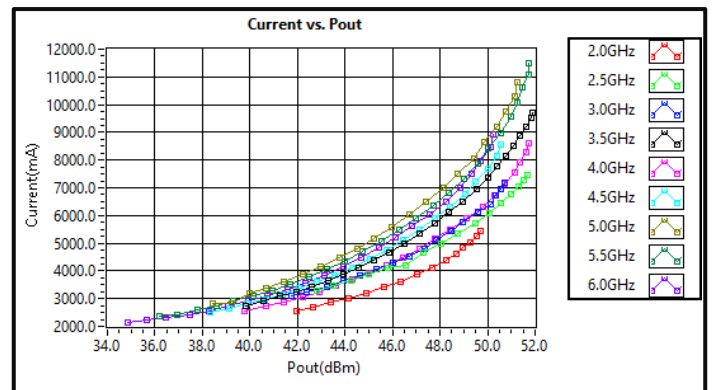

2nd Harmonic

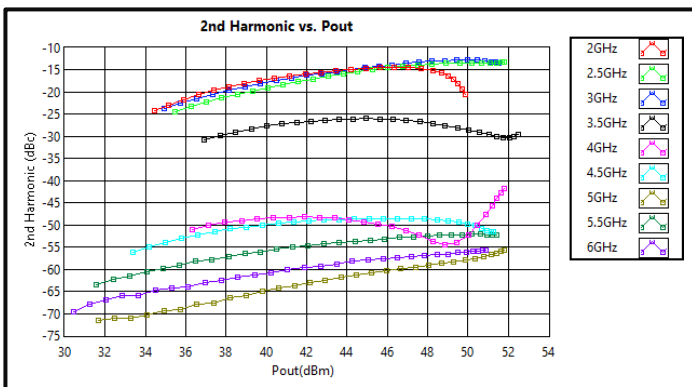


3rd Harmonic

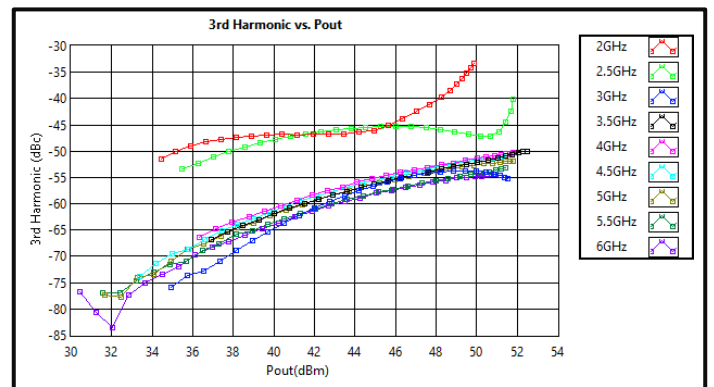


Note: IM3 test performed with 1MHz tone spacing


Blanking RF off timing: 30dBm Output Power (200 ns/div)

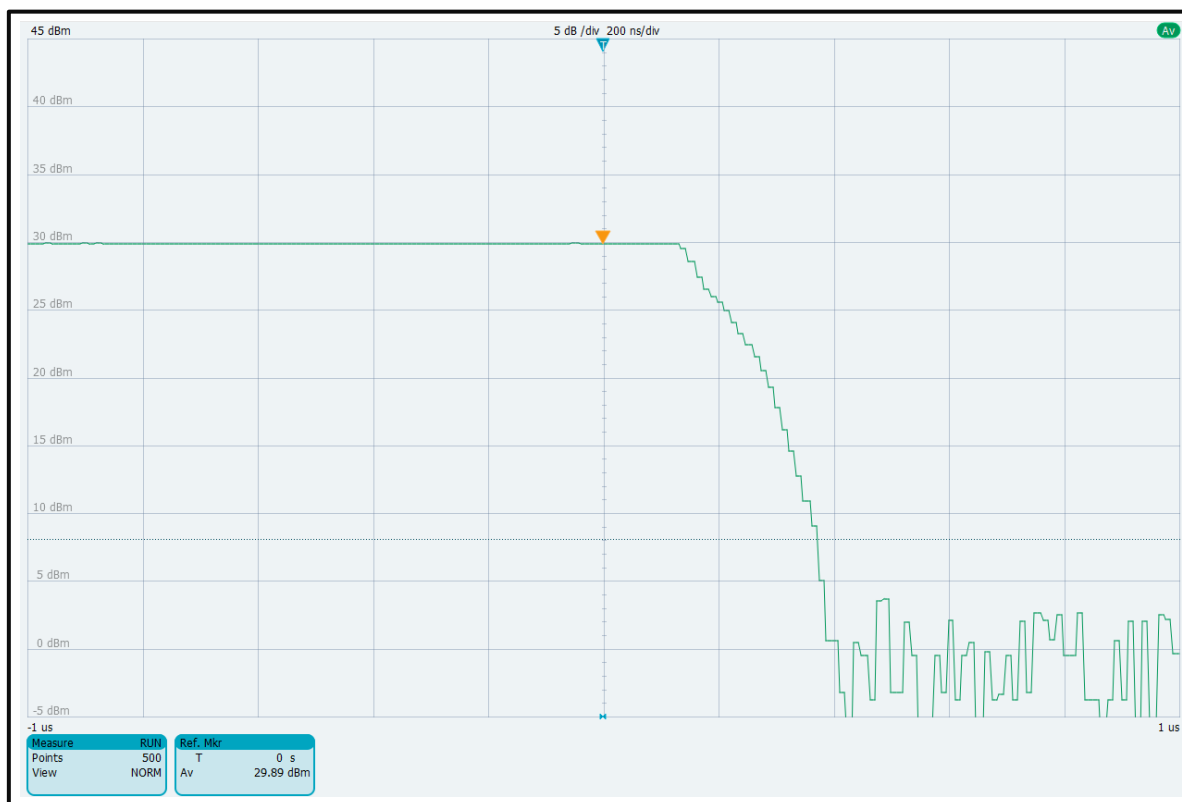


Blanking RF on timing: 30dBm Output Power (20 us/div)

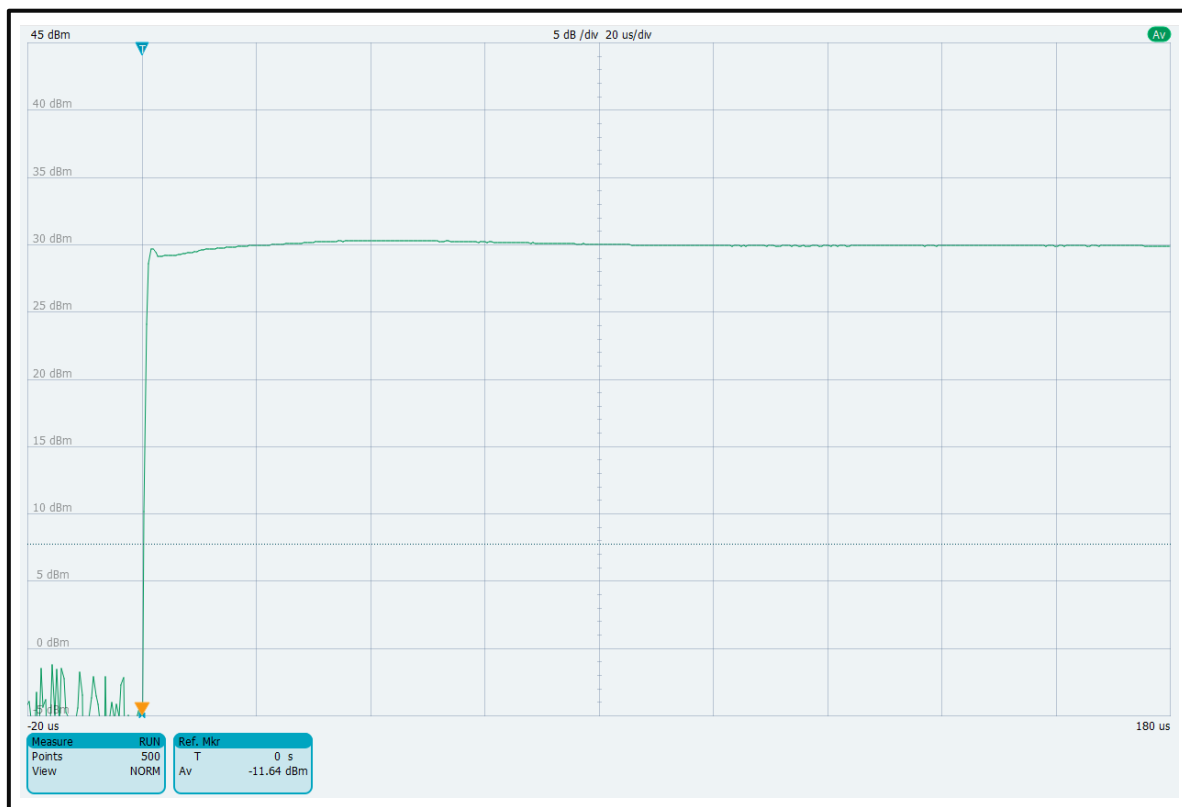


Blanking RF off timing: 40dBm Output Power (200 ns/div)

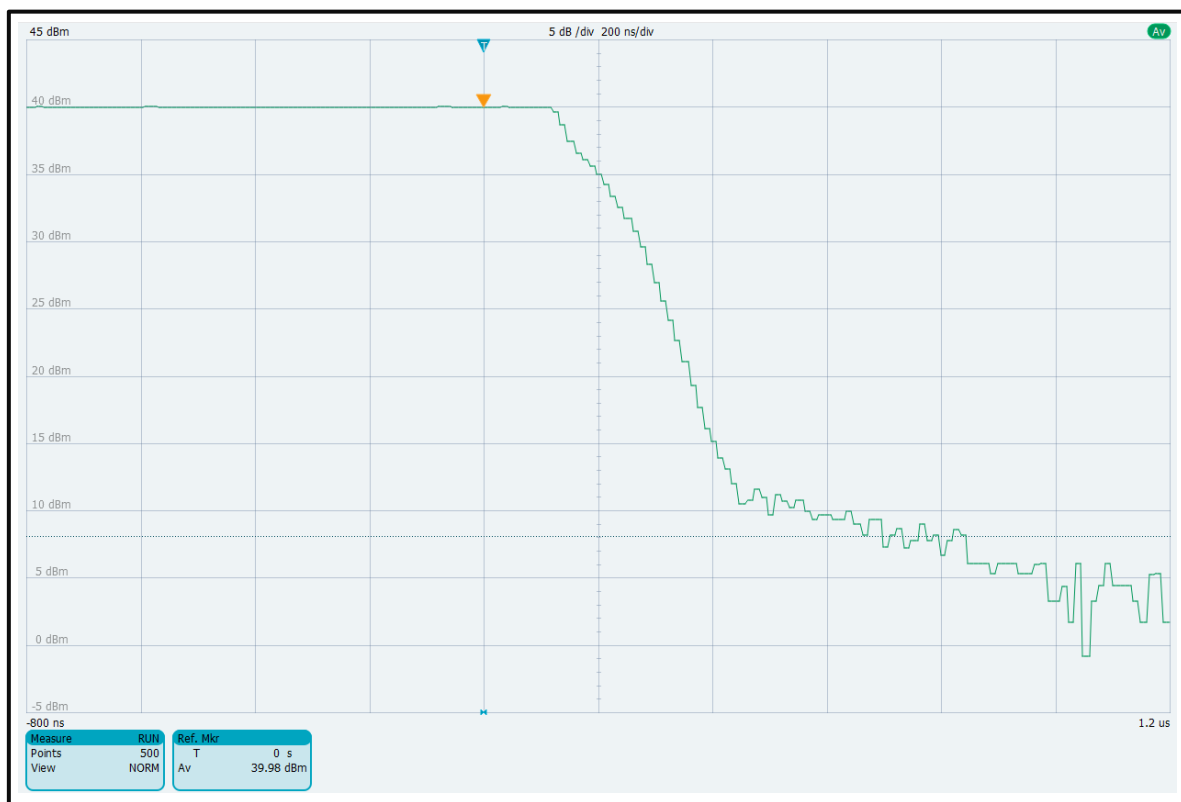


Blanking RF on timing: 40dBm Output Power (20 us/div)

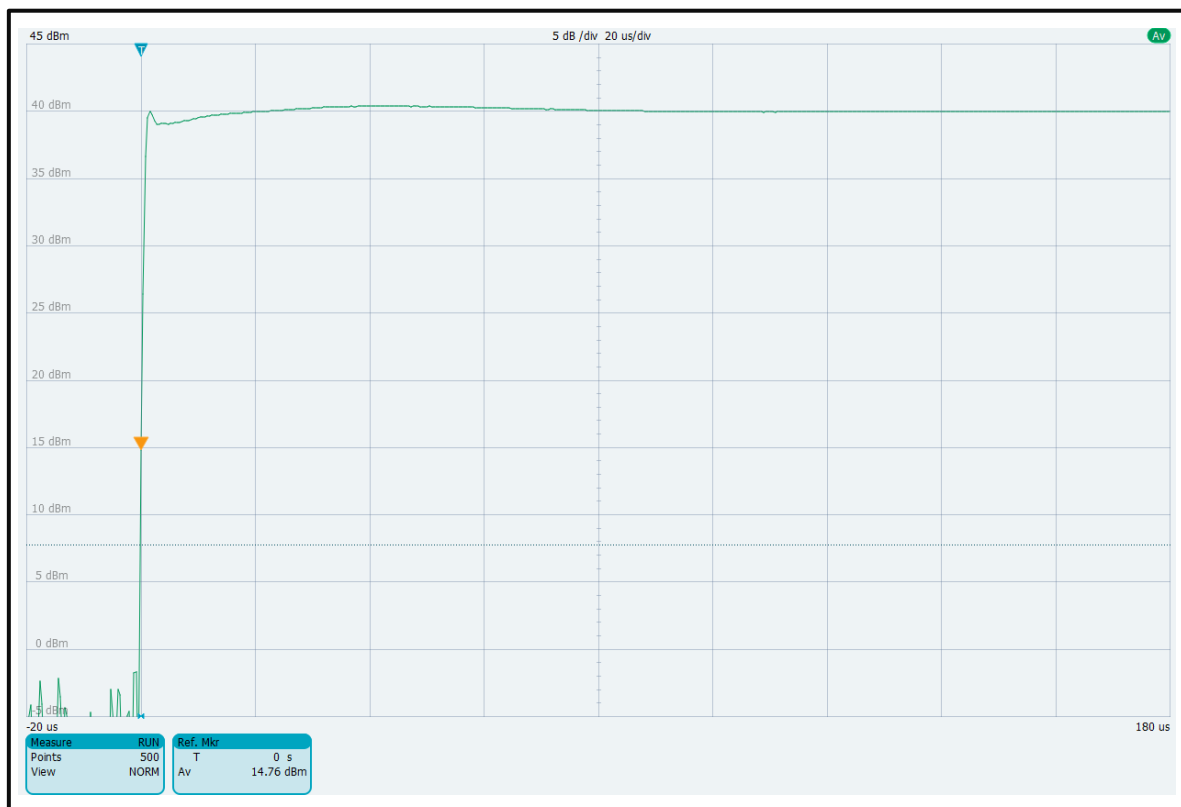

Blanking RF on timing: 30dBm Output Power (500 ns/div)

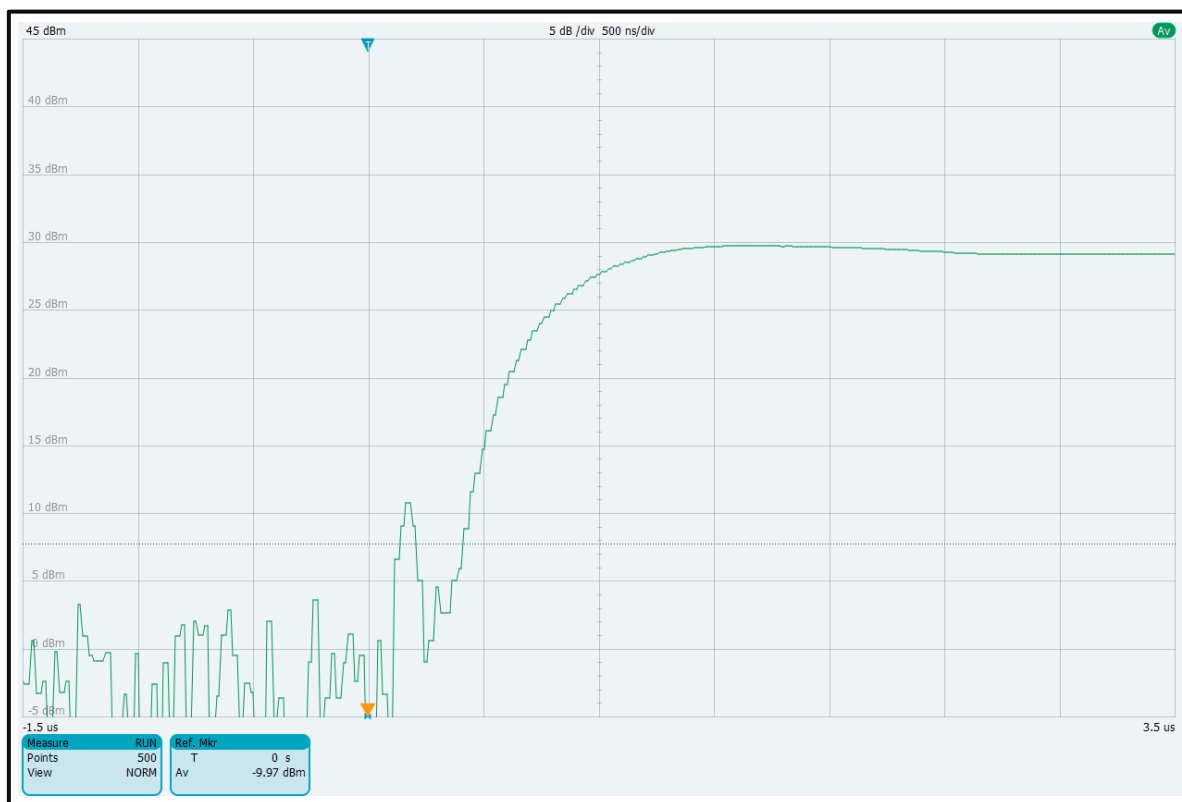


Blanking RF on timing: 40dBm Output Power (500 ns/div)

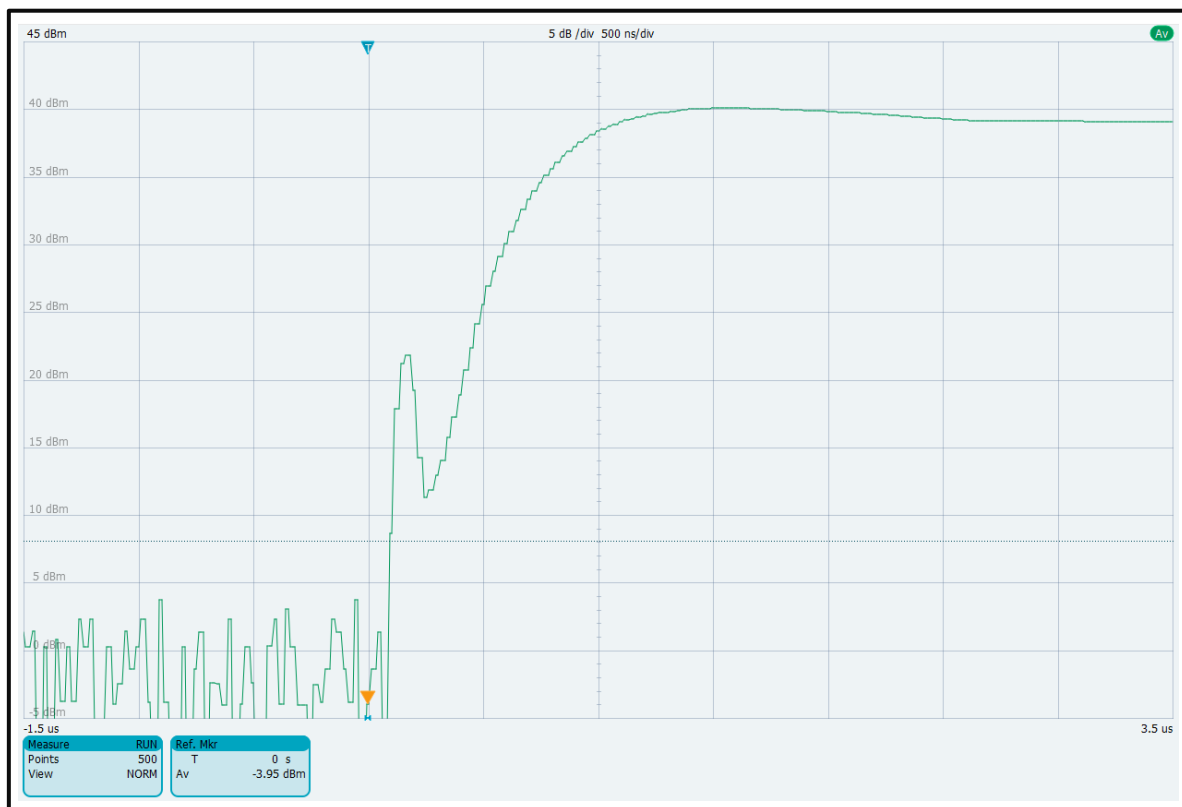

Protection Connector Table

Female D-Sub is on housing.
A mating male part number is 172-E15-103R001

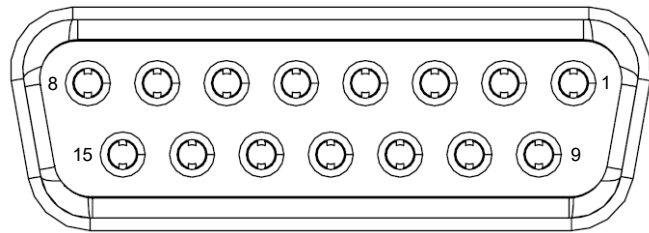


Pin #	Name	Function	Initial State	Description	Applied
1	Reset	Control	HIGH	Resets PA when logic <u>LOW</u> is applied and released.	Yes
2	Gate Disable	Control	LOW	Applying logic <u>HIGH</u> disables gates of driver amplifiers.	Yes
3	Drain Disable	Control	LOW	Applying logic <u>HIGH</u> disables drains of ALL amplifiers.	Yes
4	Input Power Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> and amplifier turned off when input RF signal maximum limit is reached.	No
5	Temperature Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> and amplifier turned off when temperature limit is reached.	Yes
6	Current Over	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> and amplifier turned off when current limit is reached by any RF components.	Yes
7	ID Imbalance	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> and amplifier turned off when current imbalance between combined RF amplifiers happens.	Yes
8	Amplifier Off	Indicator	LOW	If amplifier protection trips and turns off, logic goes <u>HIGH</u> , indicating drains and gates of amplifiers are disabled.	Yes
9	Fan Failure	Indicator	LOW	Logic will latch <u>HIGH</u> and amplifier turned off when a fan failure is detected.	No
10	Temperature Signal	Signal	ANALOG	Analog voltage between zero- and five-volts representing temperature of RF section.	No
11	VSWR	Indicator	LOW	Pin will be latched to logic <u>HIGH</u> and amplifier turned off when output reverse RF signal maximum limit is reached.	Yes
12	Input Power Monitor	Signal	ANALOG	Analog voltage between zero- and five-volts representing input signal power level.	No
13	+5V	Power Supply	+5V	+5V DC is supplied for reference.	Yes
14	Ground	Ground	GND	Ground	Yes
15	Drain Blanking	Control	LOW	Applying logic <u>HIGH</u> disables fast, drains of last stage of amplifier.	Yes

Notes:

- HIGH/LOW voltages are standard TTL signals 0.0V-0.8V = LOW. 2V-5V = HIGH. Input current is 10uA.
- Matching connector and cable will be shipped with the product.
- Applied=Yes means the feature is included. Applied=No means the feature is not included with this model.
- 5V reference supply can source 100mA.
- Indicator output signals can source 24mA.

Power Supply Connector Table

Female D-Sub is on the housing
Mating male part number: 09692100033

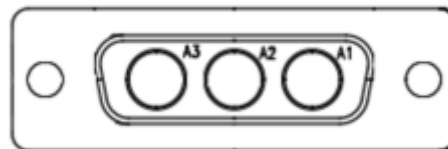


Pin #	Gender on the Housing	Function	Description	Applied
A1	Female	Ground	Ground	Yes
A2	Female	VDC	Supply Voltage	Yes
A3	Female	VDC	Supply Voltage	Yes

Notes:


- Matching connector and cable will be shipped with the product.
- If customer would like to use their own wires, 12 AWG wire is required for high current applications.
- Connector image seen as if looking at amplifier.

Outline Drawing

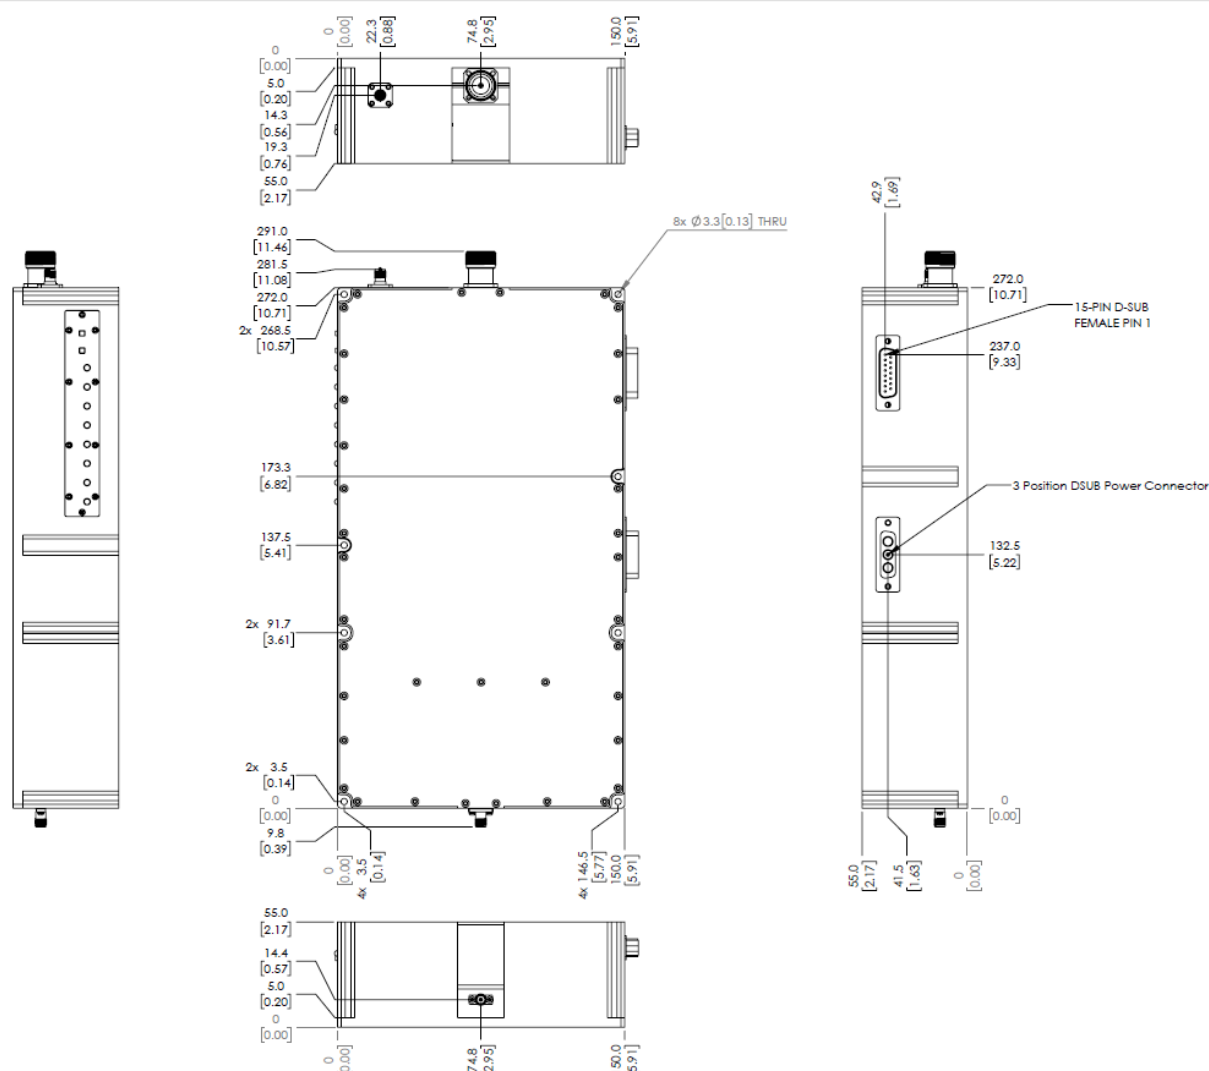

Notes:

1. Package Material: Aluminum and Copper
2. Plating: Nickel
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.25 [0.010] unless otherwise specified.
5. Heat sink required during operation (sold separately). Matching heatsink is listed on our website. If customer would like to use their own cooling method, please make sure the amplifier will operate under the specs that listed in page 2 of this datasheet.



Additional Information

Documentation

Webpage

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Heatsink Lookup Specifications

https://rflambda.com/search_heatsink.jsp

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFLUPA02G06GC-B	Input connector SMA female and Output connector N-Type female	2GHz-6GHz Power Amplifier with RF Blanking

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.