


7W ACPR Emission Compressed Linear Power Amplifier 0.7GHz-6GHz

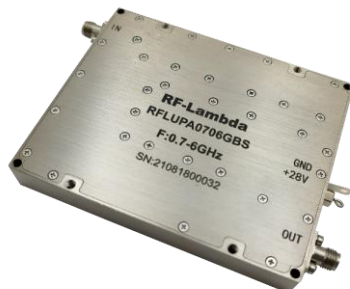

Product Description

RFLUPA0706GBS is a Linear Power Amplifier with a frequency range of 0.7 to 6GHz.

The power output of this amplifier is 39dBm typical. The typical small signal gain is 40dB with a gain flatness of ± 1.5 dB. This power amplifier works with a +28 VDC power supply.

The working temperature of this product is between - 40°C and + 85°C.

Features

- Wideband Power Amplifier
- Small Signal Gain 40dB Typical
- High P1dB +37dBm Full Band
- Output Saturation Power 39dBm Typical
- Supply Voltage +28VDC
- 50 Ohm Matched Input / Output

Typical Applications

Absolute Maximum Ratings

Parameter	Rating
Operating Voltage	+24V~29V
*RF Input Power (RFIN)	+8dBm

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load.
(In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure


1. Turn off power supply
2. Remove positive supply Connection
3. Remove RF Connection
4. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m

Typical Performance Plots

Gain@+25°C

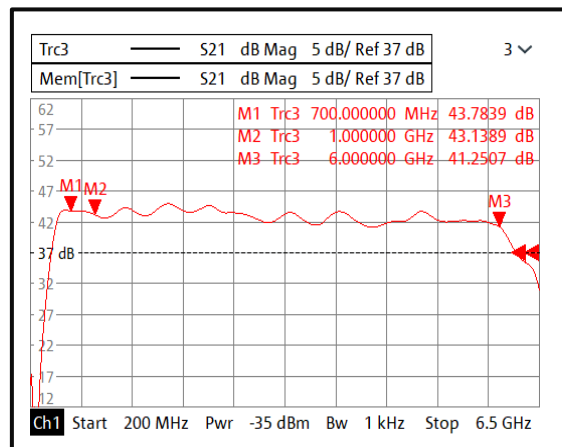


Input Return Loss@+25°C

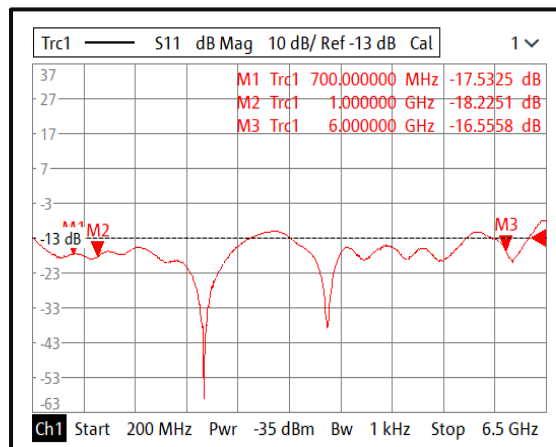


Typical Performance Plots

Gain@+85°C

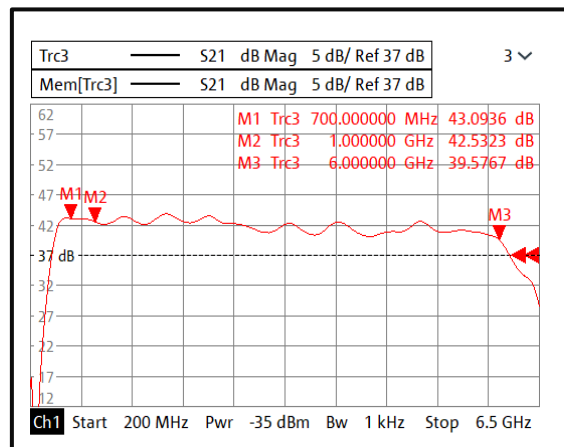


Input Return Loss@+85°C

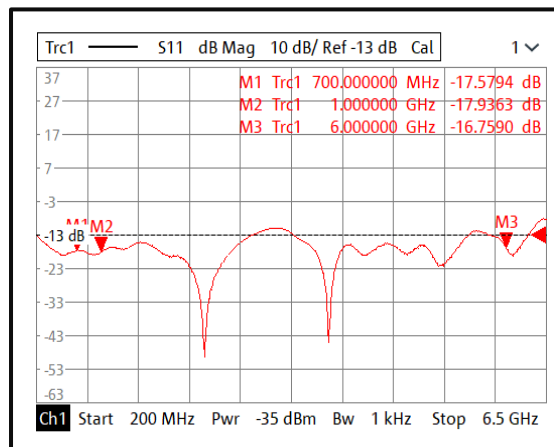


Typical Performance Plots


Gain vs. Output Power CW

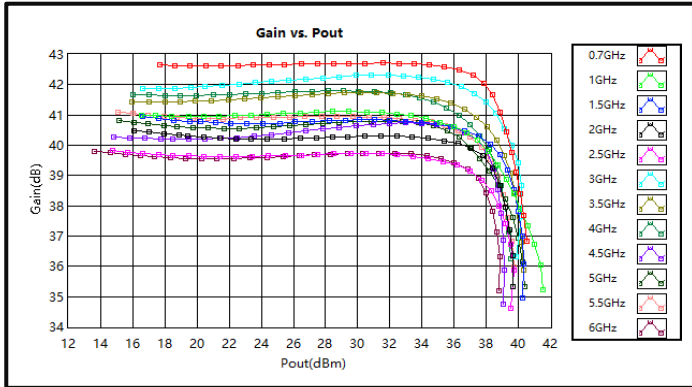

PndB vs. Frequency CW

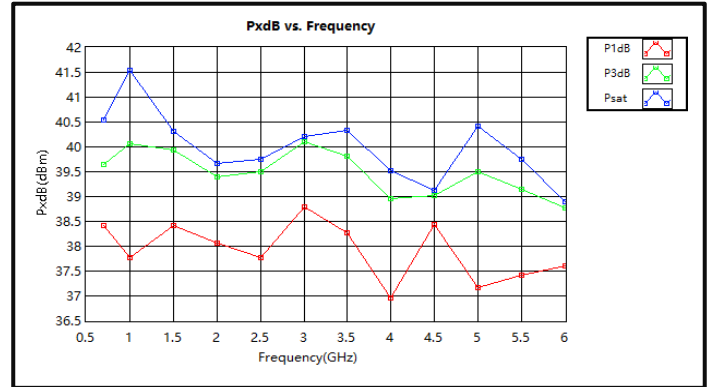


Power Added Efficiency CW

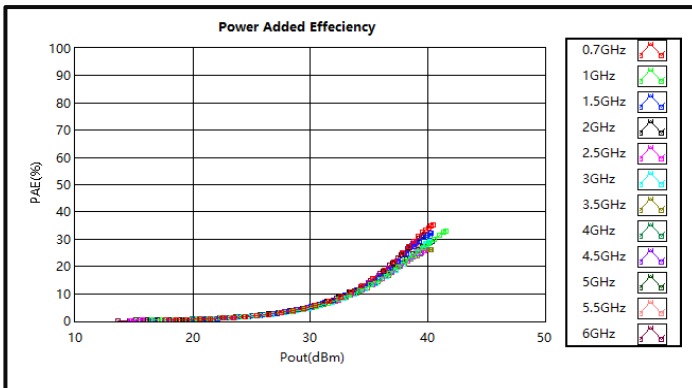


Typical Performance Plots


Left IM3 vs. Pout

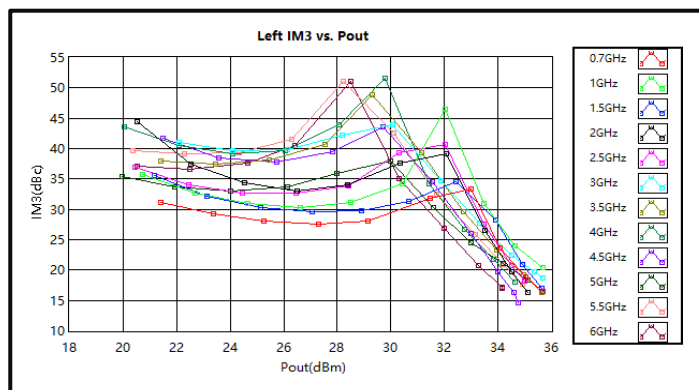

Right IM3 vs. Pout

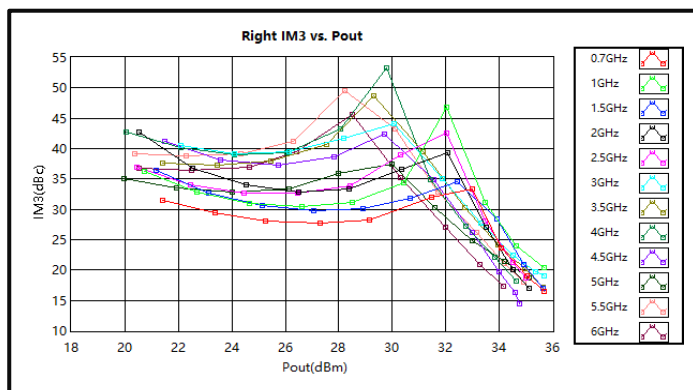


Outline Drawing

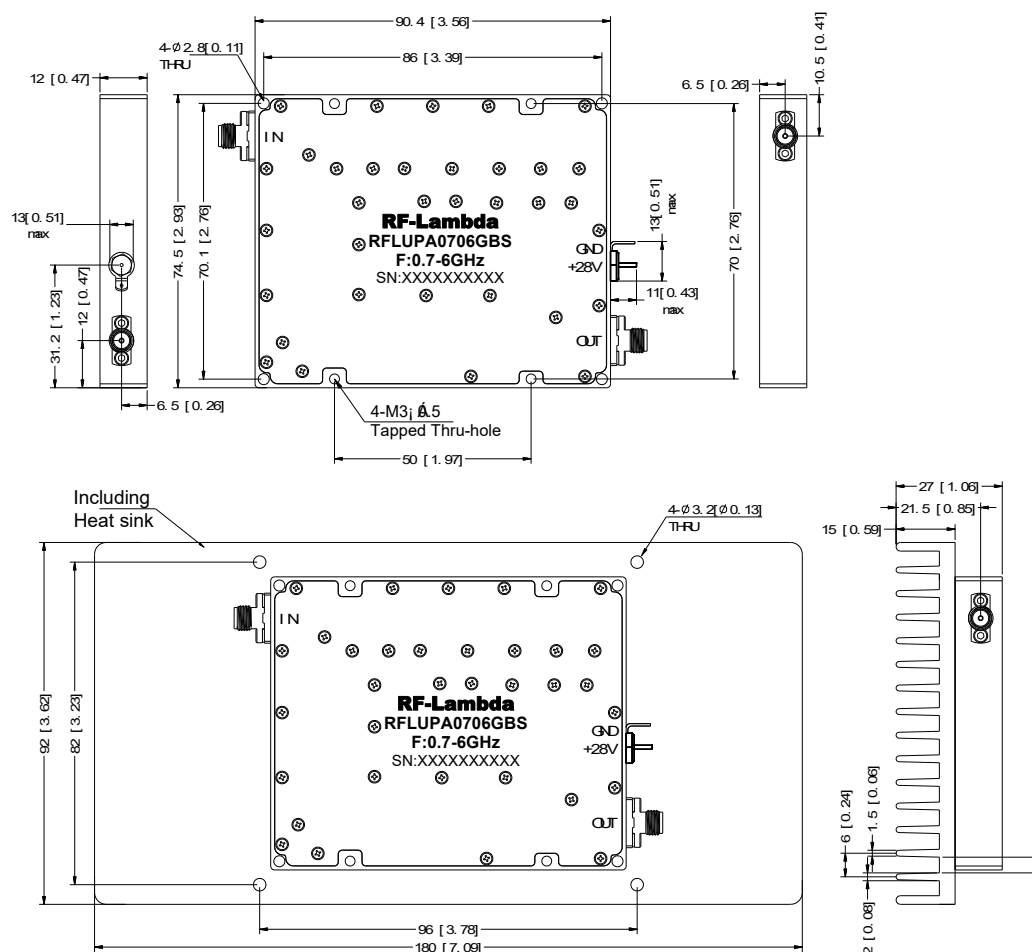

Notes:

1. Package Material: Aluminum
2. Finish: Nickel Plated
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.2 [0.008] unless otherwise specified (Excl Heat Sink).
5. Heat sink required during operation (sold separately). Matching heatsink is listed on our website. If customer would like to use their own cooling method, please make sure the amplifier will operate under the specs that listed in page 2 of this datasheet.
6. Standard torque wrench must be used to secure RF connectors.



Ordering Information

Part Number	Modification	Description
RFLUPA0706GBS	Standard	0.7GHz-6GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection