



RF-LAMBDA

The power beyond expectations

RFLUPA13G16GB

60W Power Amplifier 12.5-16GHz



- Short Haul / High Capacity Links
- High Power Amplifier
- Military & Space
- Psat: + 48dBm
- Gain: 50 dB
- Supply Voltage: +48V
- 50 Ohm Matched Input/Output



Electrical Specifications , $T_A = +25^\circ \text{C}$ $V_d = +48\text{V}$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	12.5 - 14			15 - 16			GHz
Gain		50			45		dB
Gain Flatness		±5			±4		dB
Gain Variation Over Temperature(-45 ~ +85)		±3			±3		dB
Input Return Loss		15			13		dB
Output Return Loss		15			15		dB
Saturated Output Power (Psat)		48			47		dBm
Supply Current (Idd) (Vcc=+48V)		1			1		A
Isolation S12		65			65		dB
Input Max Power(no damage)	Psat-Gain			Psat-Gain			dBm
Weight	3000						g
Impedance	50						Ohms
Input /Output Connector	SMA-Female						
Power / Control Connector	D-sub COMBO 3POS						
Finishing	Standard: Nickel 220 micron thickness						
Material	Aluminum/copper						
Package Sealing	Epoxy and Screw tight Sealing (Standard)						
	Hermetically Seal (Option with extra charge)						

* P1dB, P3dB and Psat power testing signal: 200 μ s pulse width with 10% duty cycle.

* For average CW power testing, a 5dB back off from Psat is required unless water/oil cooling system is applied.



RF-LAMBDA

The power beyond expectations

RFLUPA13G16GB

40W Wide Band Solid State Power Amplifier 12.5-16GHz

Absolute Maximum Ratings	
Supply Voltage	+50Vdc
RF Input Power (RFIN) Pin_max = Psat - Gain	Psat-Gain
Storage Temperature(°C)	-50 to +125

Note: Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves

Biasing Up Procedure	
Step 1	Connect Ground Pin
Step 2	Connect input and output with 50 Ohm source/load. (in band VSWR<1.9:1 or >10dB return loss)
Step 3	Turn On +48V DC Voltage
Power OFF Procedure	
Step 1	Turn off +48V DC Voltage
Step 2	Remove RF connection
Step 3	Remove Ground.

Environment Specifications	
Operational Temperature (°C)	-45 ~ +85(Case Temperature must be less than 85C all time)
Altitude	30,000 ft. (Epoxy Seal Controlled environment) 60,000 ft 1.0psi min (Hermetically Seal Un-controlled environment) (Optional)
Vibration	25g rms (15 degree 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40°C
Shock	20G for 11msc half sin wave, 3 axis both directions

Note: The operating temperature for the unit is specified at the package base. It is the user's responsibility to ensure the part is in an environment capable of maintaining the temperature within the specified limits

Ordering Information		
Part No	ECCN	Description
RFLUPA13G16GB	3A001.b.4.b.4	13GHz~16GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF-Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.


What is not covered with warranty?

Each of RF-Lambda amplifiers will go through power and temperature stress testing.


Due to fragile of the die, IC or MMIC, those are not covered by warranty. Any damage to those will NOT be free to repair.




Gain

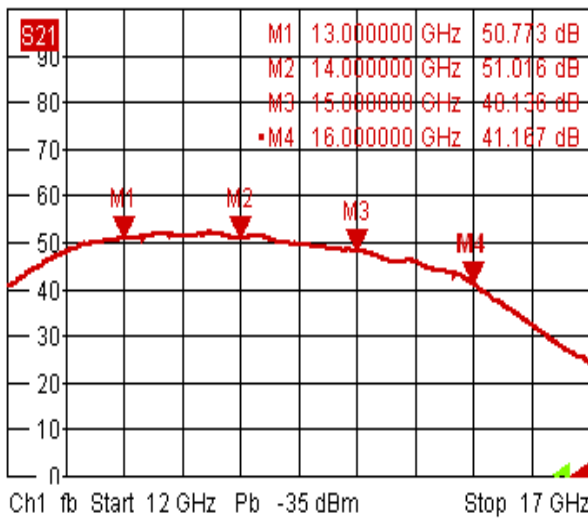


Input Return Loss

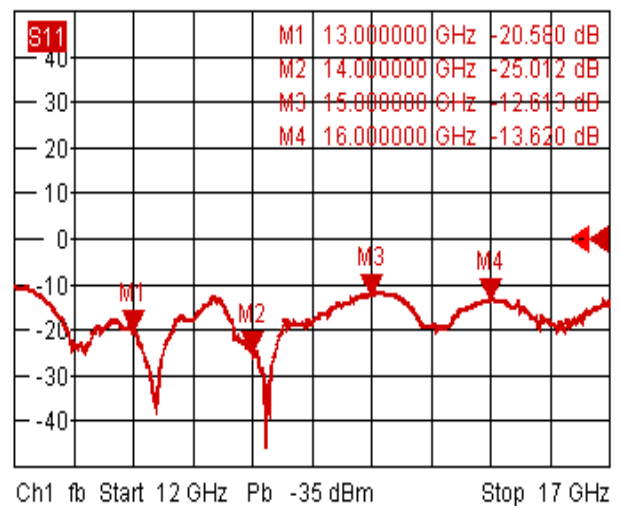

Output Return Loss

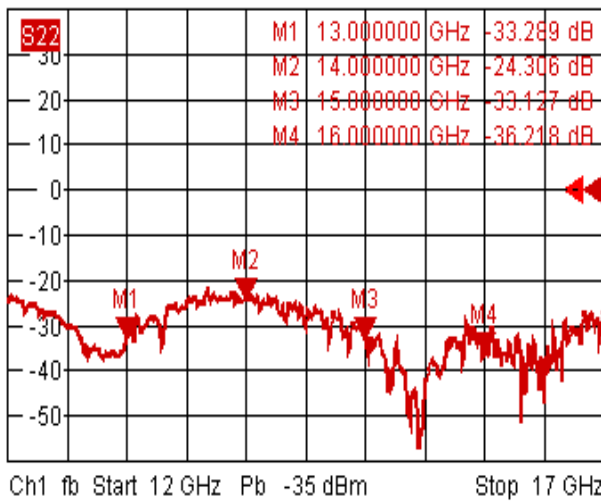

Isolation

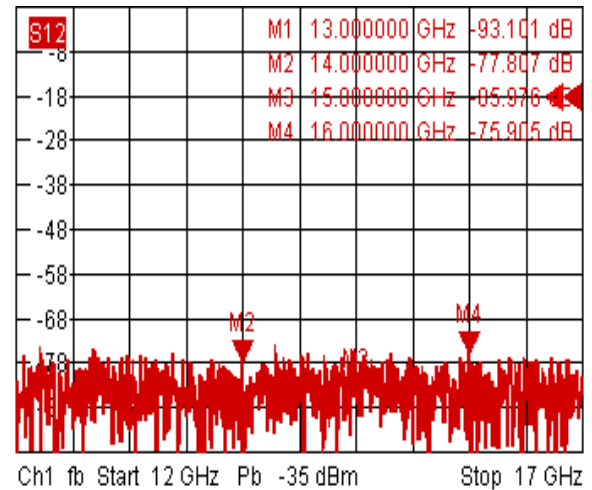

Note: Input/output return loss measurements include attenuators to protect equipment




RF-LAMBDA


The power beyond expectations

RFLUPA13G16GB



Gain vs. Output Power

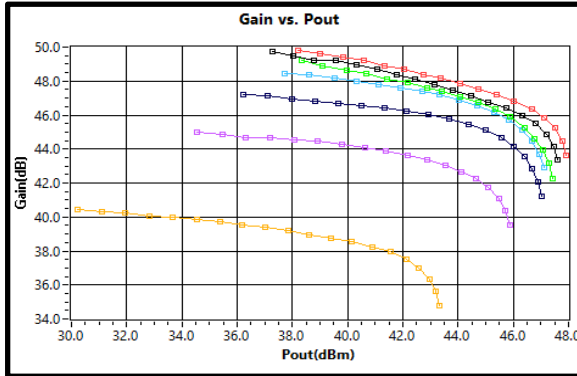

P1dB vs. Frequency

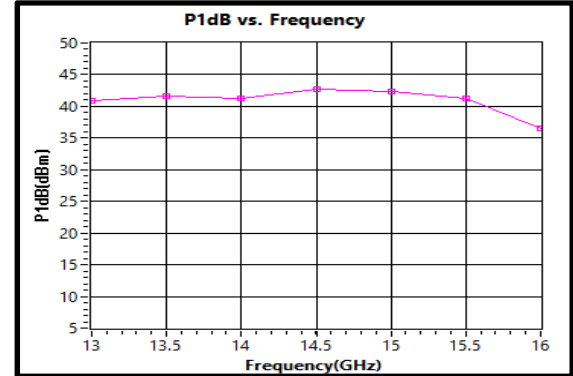


P7dB vs. Frequency

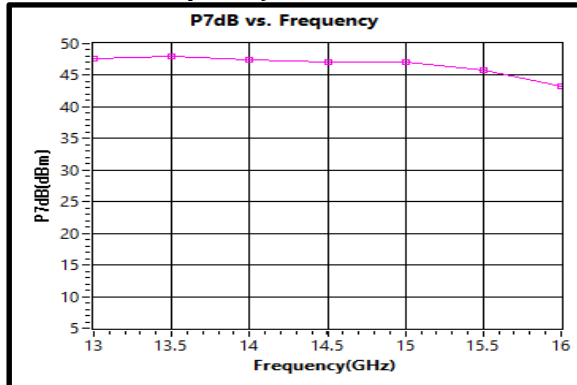

40W Wide Band Solid State Power Amplifier 12.5-16GHz



Alarm Status Panel:

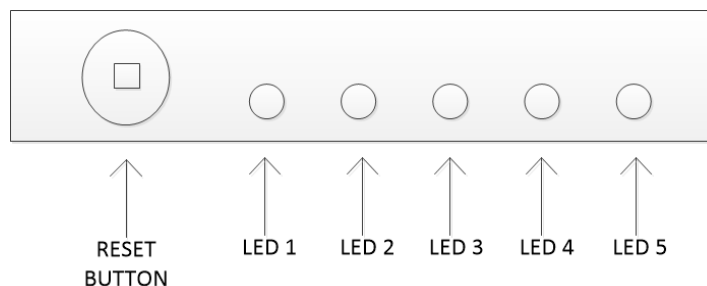

	NAME	Function	Initial State	DESCRIPTION	Applied
	RESET	Control		Manual reset button to reset PA.	Yes
LED 1	POWER	Indication	RED Color	LED will light up to <u>RED</u> color when supply power is applied	Yes
LED 2	RFIN	Indication	GREEN Color	PA will first shut down then latch this LED to <u>RED</u> color when input signal is over limit*	Yes
LED 3	VSWR	Indication	GREEN Color	PA will first shut down then latch this LED to <u>RED</u> color when output reflection is over limit*	Yes
LED 4	ID	Indication	GREEN Color	PA will first shut down then latch this LED to <u>RED</u> color when imbalance in drain current of combining branches, or Current Limit is reached*	Yes
LED 5	TEMP	Indication	GREEN Color	PA will first shut down then latch this LED to <u>RED</u> color when driven over temperature*	Yes


*LED need to be manually reset to initial state by RESET button



RF-LAMBDA

The power beyond expectations


RFLUPA13G16GB

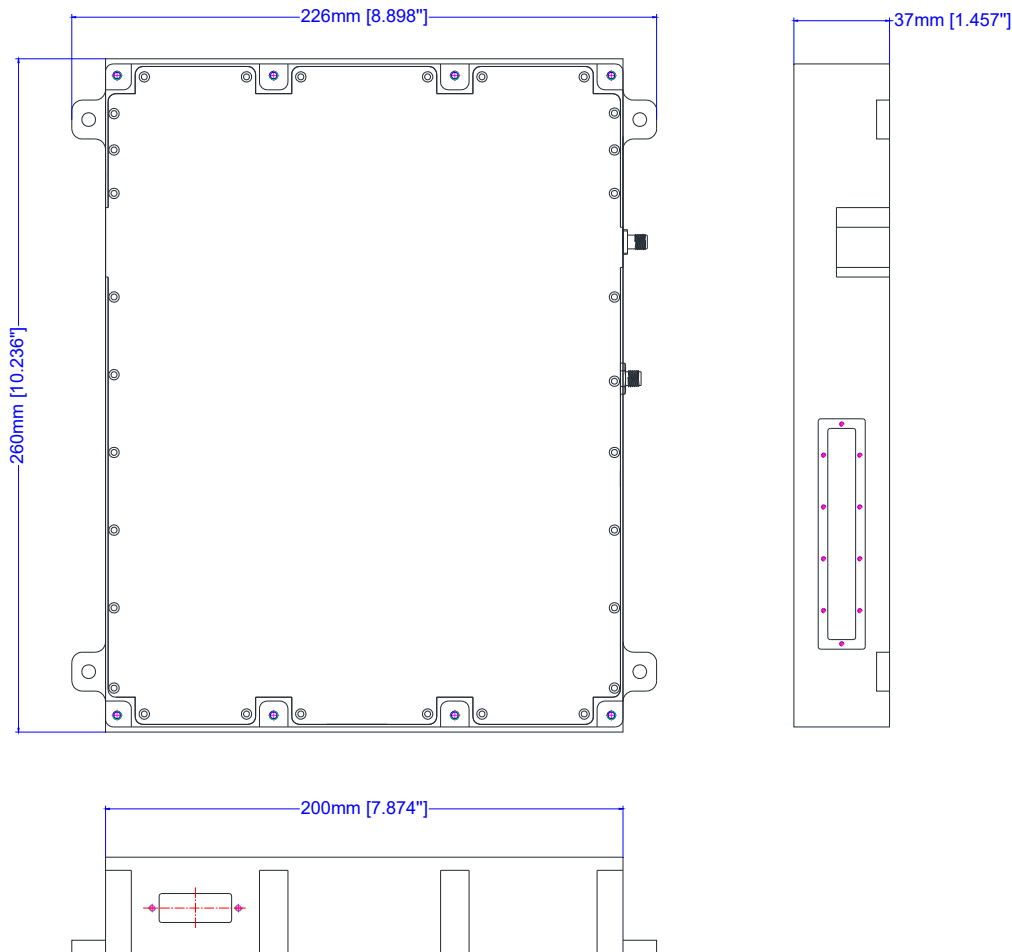

*****Heat Sink and cooling fan required during operation*****



Power Supply Connector Drawing:

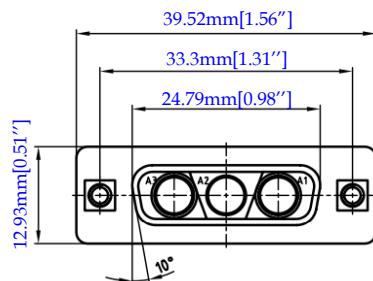





RF-LAMBDA

The power beyond expectations

RFLUPA13G16GB

Heatsink

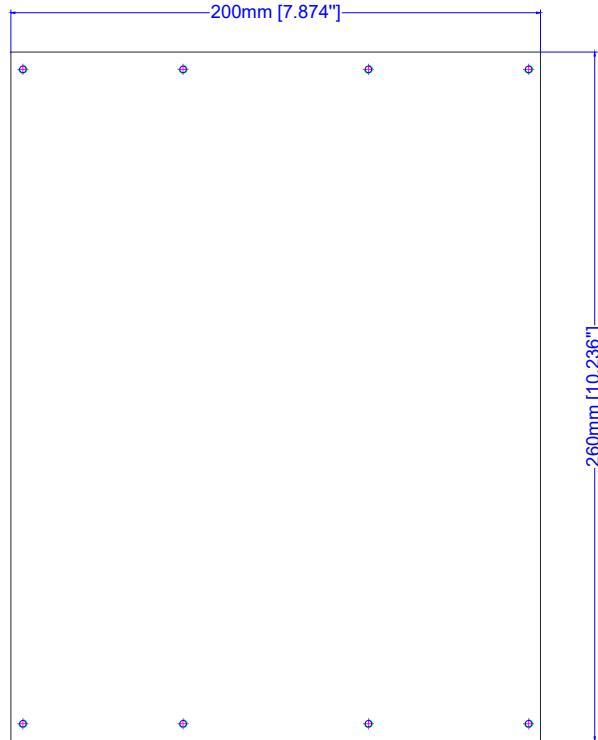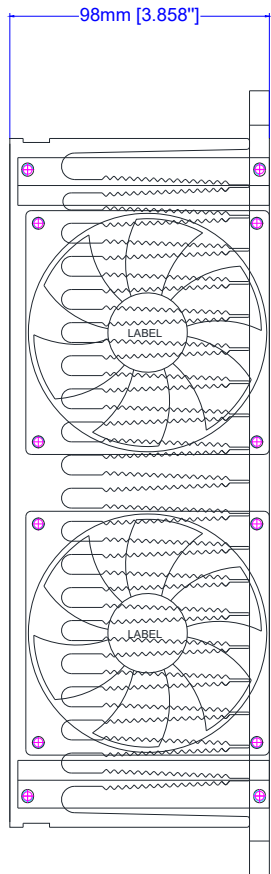

Heat Sink and cooling fan required during operation



Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.