

Ultra Low Noise Amplifier 1.2GHz-1.6GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Product Description

RLNA12G16GA is a wide band ultra low noise amplifier with a frequency range of 1.2 to 1.6GHz.

The power output of this amplifier is 19.5dBm typical. The typical gain is 41dB with a flatness of ± 0.5 dB.

The working temperature of this product is between - 40 °C and + 85 °C.

Features

- Wide Band ultra Low Noise Amplifier
- Gain 41dB Typical
- P1dB Output Power 19.5dBm Typical
- Supply Voltage +28VDC
- 50 Ohm Matched Input / Output
- Low Noise Figure +0.5dB Typical
- Gain Flatness +/-0.5dB

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Units
Frequency Range	1.2		1.6	GHz
Gain	40	41	42	dB
Gain Flatness		± 0.5		dB
Gain Variation Over Temperature (-40°C~+85°C)		± 1.0		dB
Noise Figure		0.5	0.7	dB
Input Return Loss		-15		dB
Output Return Loss		-12		dB
Output 1dB Compression Point (P1dB)	18.5	19.5		dBm
Saturated Output Power (Psat)		20.5		dBm
Output Third Order Intercept (OIP3)		35		dBm
Isolation S12		-65		dB
Supply Current(VCC=+28V)		90	150	mA
Weight		0.086 Max.		lbs.
Impedance		50		Ohms
Supply Control Connector		MICRO-D9 (Female)		
Input / Output Connectors		SMA-Female(Input)-SMA-Female(Output)		
Package		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Parameter	Rating
Operating Voltage Maximum	+33VDC
Operating Voltage Minimum	+23VDC
*RF Input Power (RFIN)	+0dBm

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure

1. Turn off power supply and remove positive supply
2. Disconnect input and output with 50 Ohm source/load. (In band VSWR < 1.9:1 or >10dB return loss.)
3. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.


**For vibration testing details please see additional information section.

Typical Performance Plots


Gain@+25°C

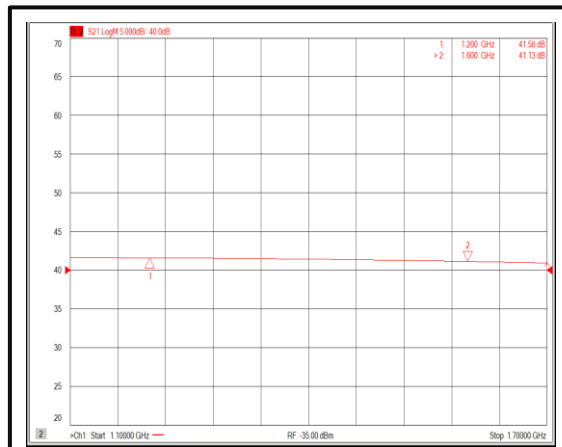


Input Return Loss@+25°C

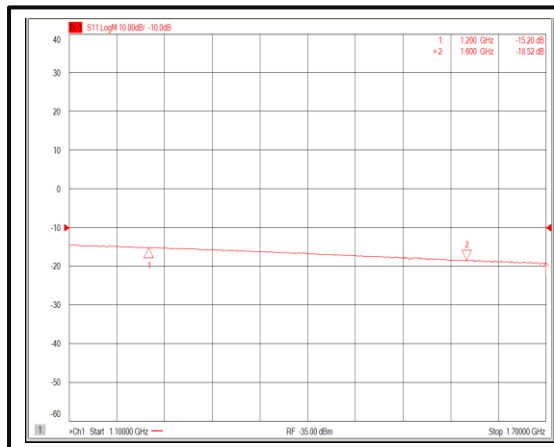


Output Return Loss@+25°C

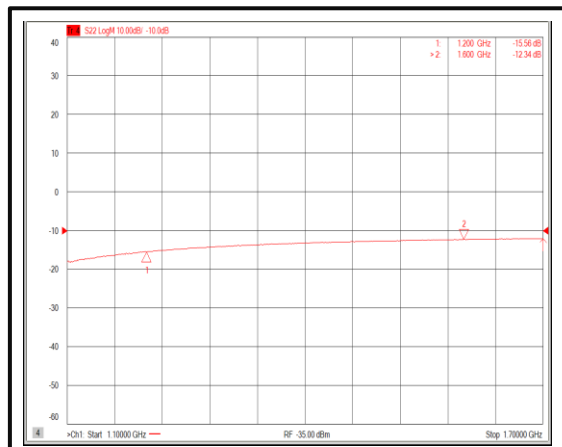


Isolation@+25°C

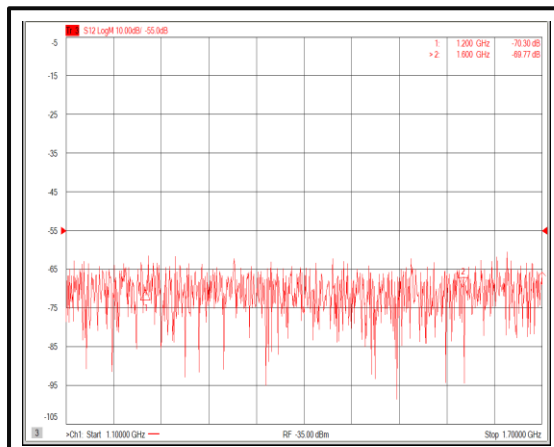

Gain@-40°C

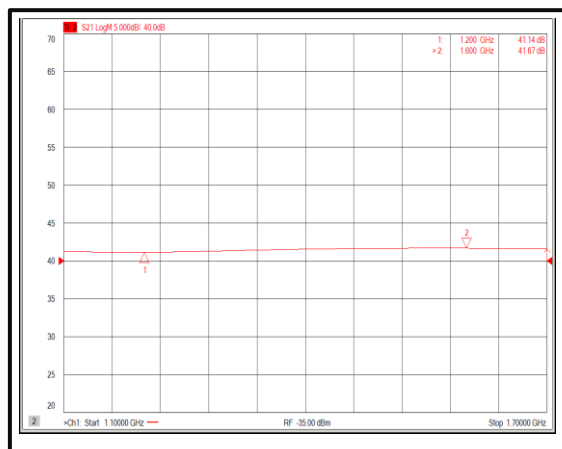


Input Return Loss@-40°C

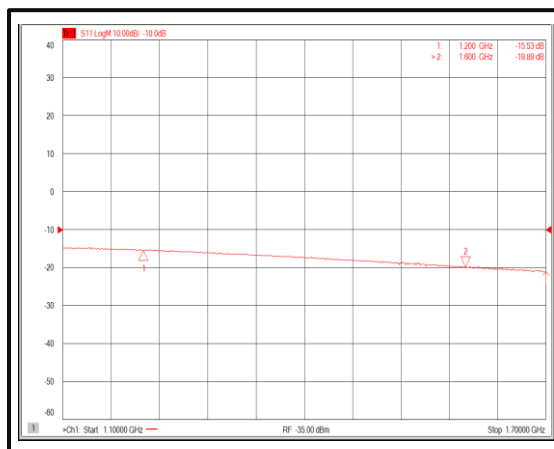


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Output Return Loss@-40°C

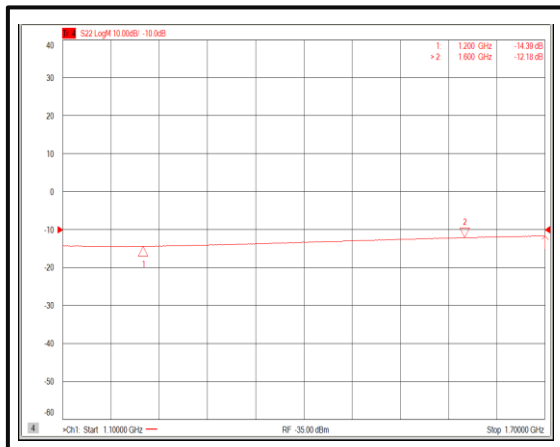


Isolation@-40°C

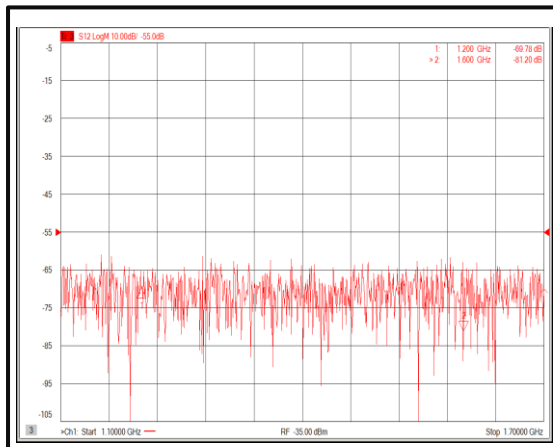


Gain@+85°C

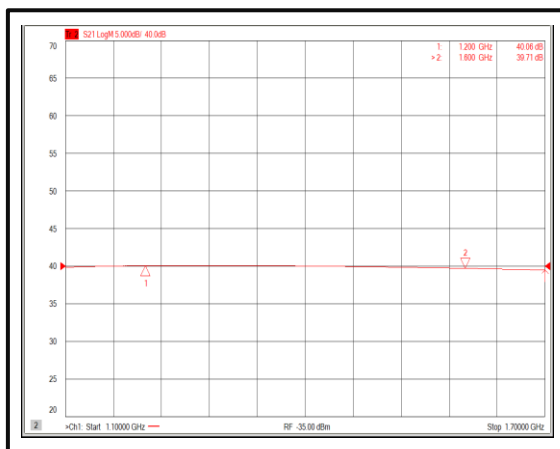


Input Return Loss@+85°C

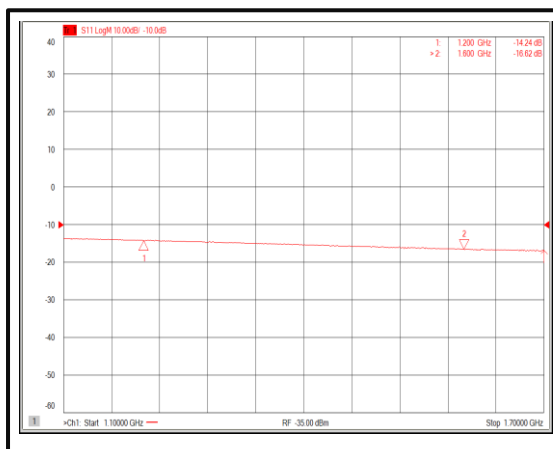

Output Return Loss@+85°C

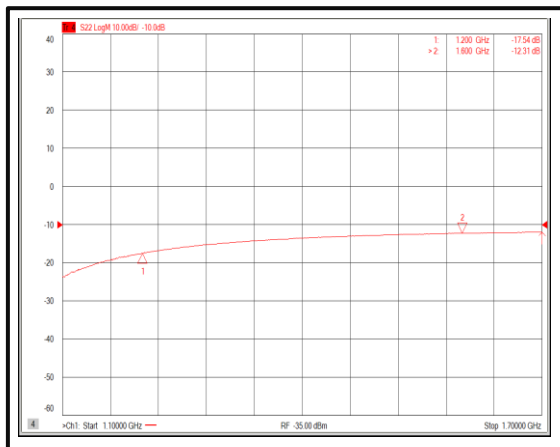


Isolation@+85°C

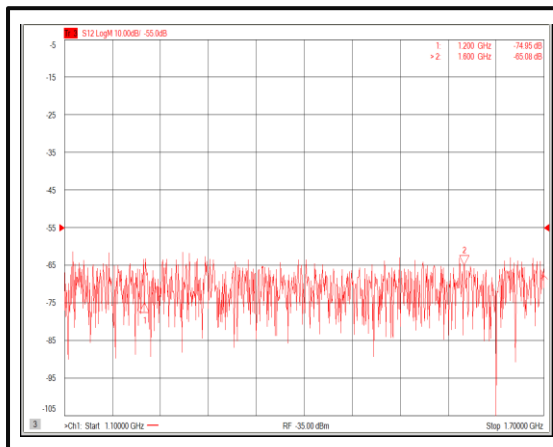


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain vs. Output Power

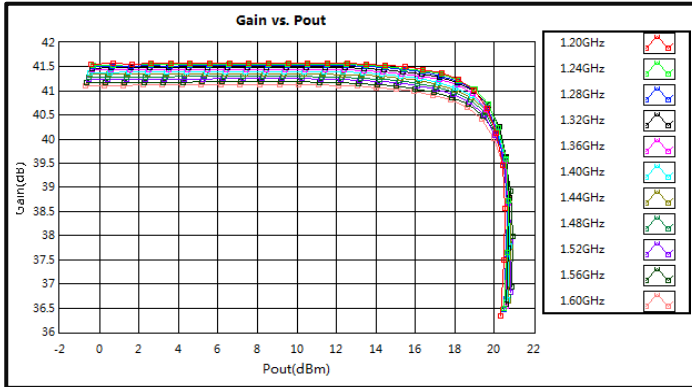


P1dB & P3dB vs. Frequency

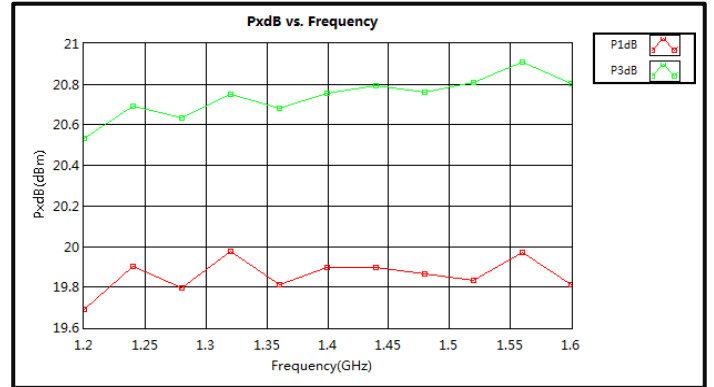


Output Third Order Intercept (OIP3)

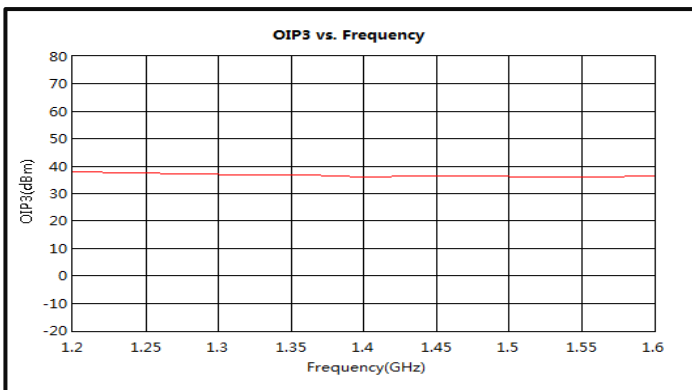


Saturation Power vs. Frequency

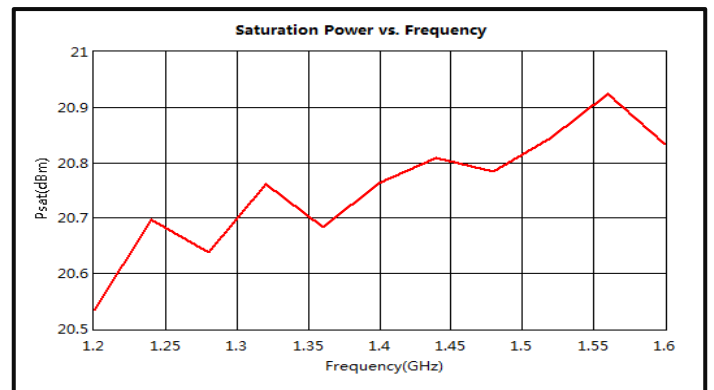

Noise Figure

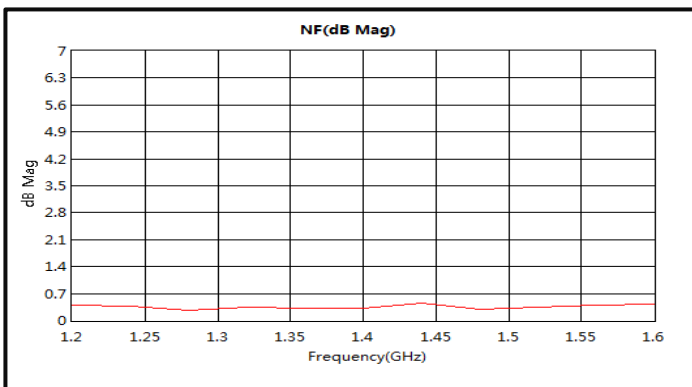


Pout vs. Pin

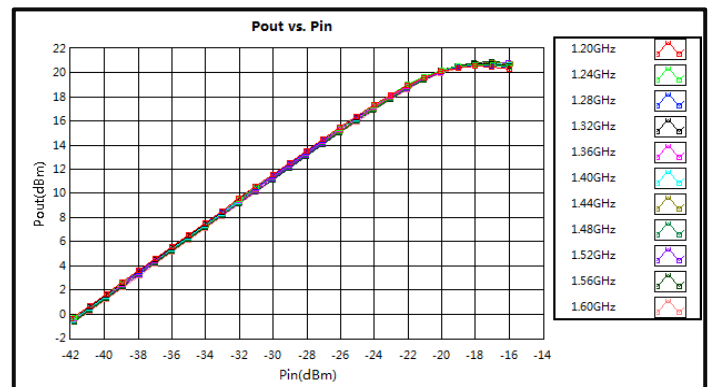


Typical Performance Plots

Current vs. Frequency

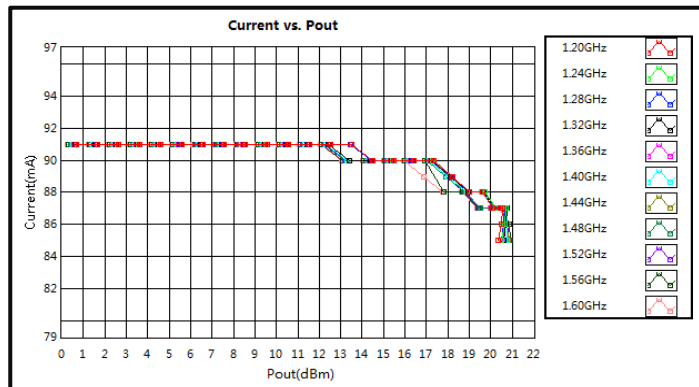


DC Interface Connector

MICRO-D9 Female is on the housing
The mating Male part number: 380-009-113L001

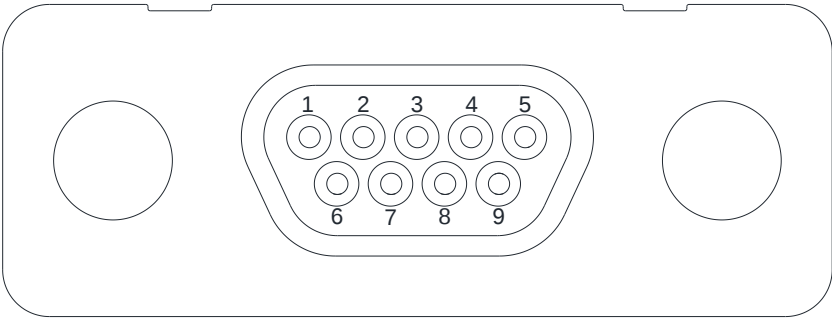

Pin #	Description	Specifications
1,2	VDD	+28VDC
4,5	GND	Ground
3,6,7,8,9	NC	/

Outline Drawing

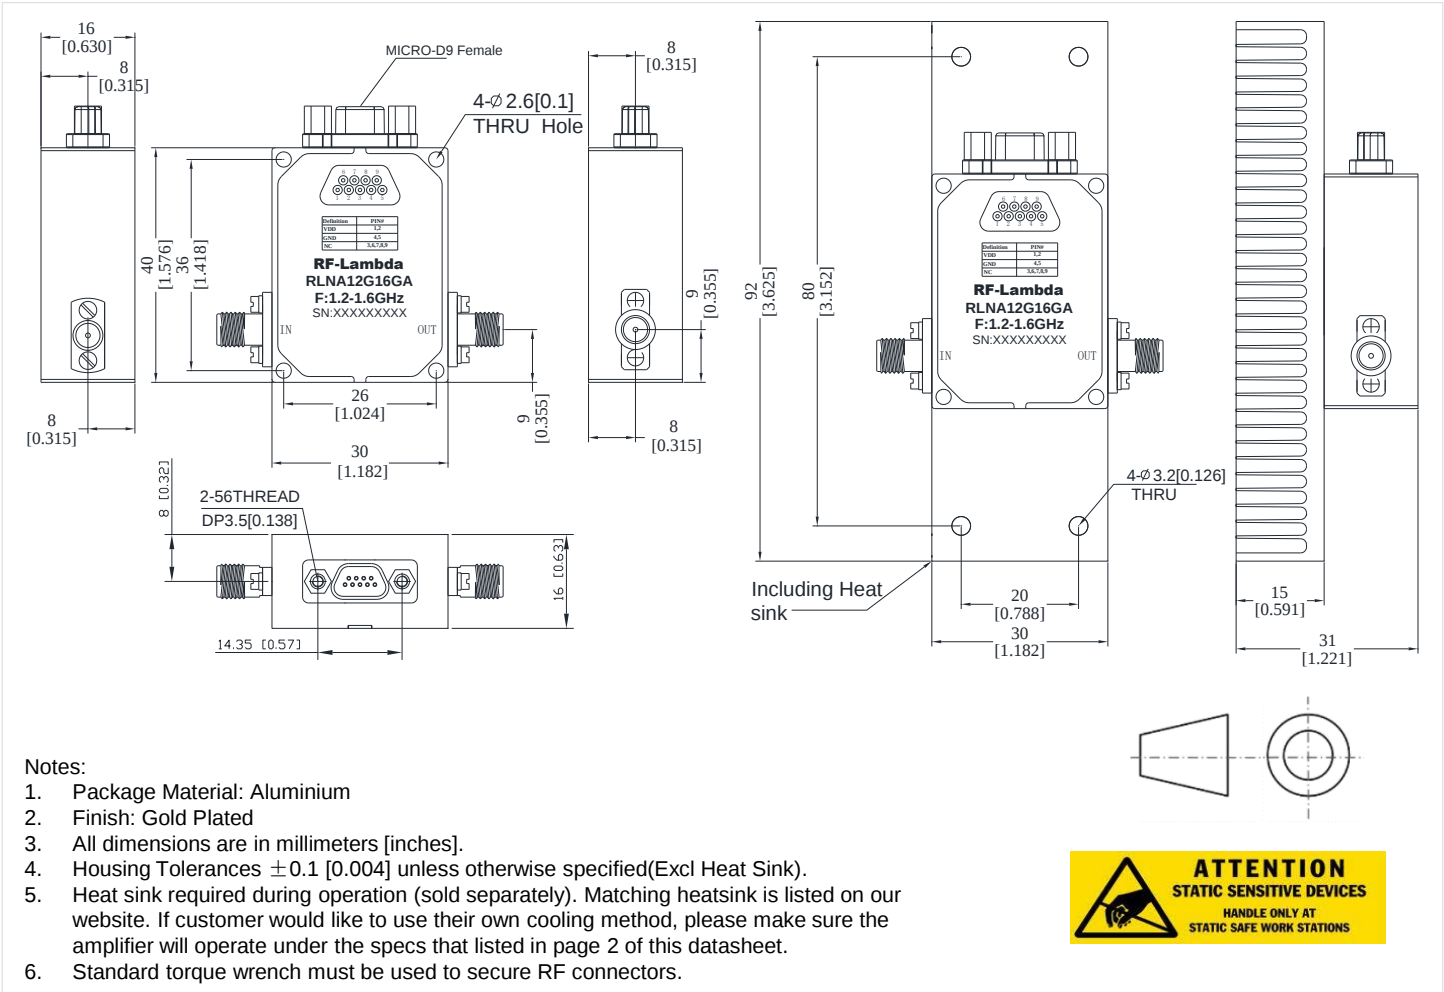

Packing List

ID	Description	QTY
1	Fig a. D-Sub cable (51321000008)	1

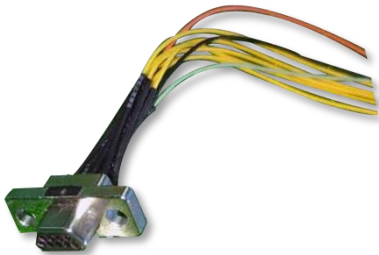


Fig a.

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Heatsink Lookup Specifications	https://rflambda.com/search_heatsink.jsp
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RLNA12G16GA	Standard	0.6GHz-2GHz Low Noise Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.