



## 1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 12"

### Description:

**Model SCW-EMEM012-F1** is a 12" long, flexible, coaxial cable with 1.35 mm (E) male connectors that cover the frequency range of DC to 90 GHz. The coaxial cable utilizes the highest quality test instrumentation grade cable and a precision manufacturing process to guarantee superior microwave performance and mechanical durability. The impedance of the cable is 50 ohms. Other lengths are offered under different models.



### Features:

- High Return Loss
- Low Insertion Loss
- Flexible and Durable

### Applications:

- Test Lab
- Sub-assemblies

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency	DC		90 GHz
Insertion Loss		5.1 dB	
Return Loss		14 dB	
Impedance		50 Ω	
Power Handling			2 W (CW)
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C


### Mechanical Specifications:

Item	Specification
Connectors	1.35 mm Male
Connector Contact Material/Plating	Beryllium Copper (BeCu)/Gold Plating Per MIL-G-45204
Connector / Cable Insulation Layer Material	Passivated Stainless Steel / PEI
Cable Jacket Material	Fluorinated Ethylene Propylene (FEP)
Cable Outer Diameter	0.057"
Length	12"
Minimum Bending Radius	0.25"
Weight	0.8 Oz
Outline	CW-EE-F10




## 1.35 mm (M) to 1.35 mm (M) Coaxial Cable, Flexible, 12"

### Typical Performance vs. Frequency

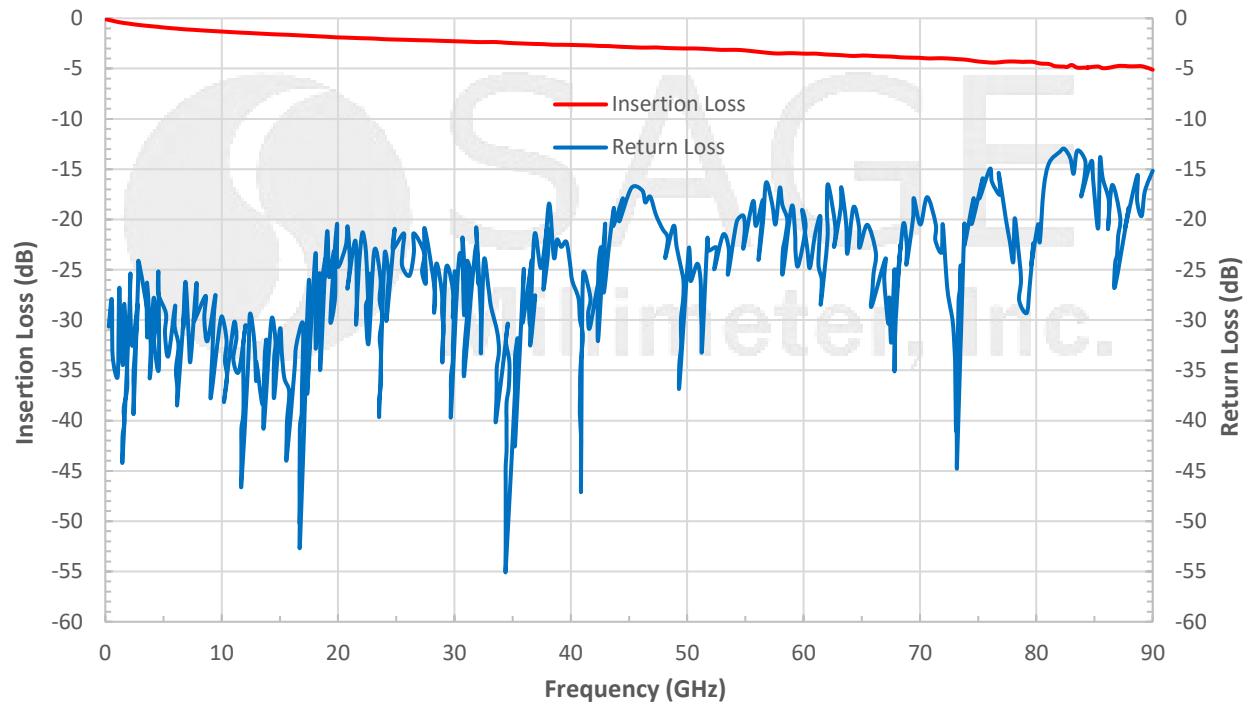

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches)

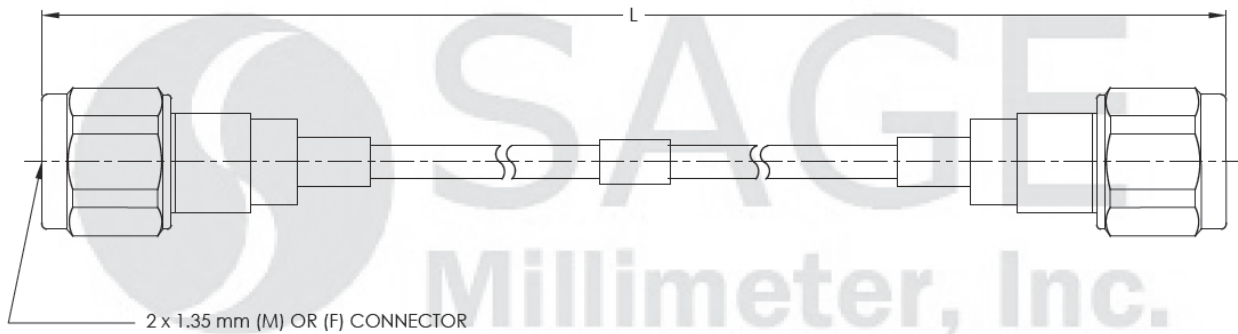

**Note:**

- Length "L" can be customizable.
- All data presented is collected from a sample lot. Actual data may vary unit to unit, slightly.
- All testing was performed under +25 °C case temperature.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

**Caution:**

- Bending the cable sharply will either cause damage or degrade the performance of the cable.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-U3, is highly recommended.**



www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505  
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com