

OEM719

Multi-frequency, backward compatible GNSS receiver supports all modern signals

High-precision GNSS, backward compatible

The multi-frequency OEM719 offers future-ready precise positioning for space-constrained applications. Advanced interference mitigation features maintain high performance in challenging environments. The OEM719 provides the most efficient way to bring powerful Global Navigation Satellite System (GNSS) capable products to market quickly. It is form factor and pin-compatible with the popular OEM615 and OEM617 receivers from Hexagon | NovAtel. With centimetre-level positioning utilising TerraStar satellite-delivered correction services, the OEM719 ensures globally available, high-performance positioning without the need for expensive network infrastructure. Anywhere. Anytime.


Built-in flexibility

The OEM719 can be configured in multiple ways for maximum flexibility. OEM7 firmware from NovAtel allows users to configure the OEM719 for their unique application needs. The OEM719 is scalable to offer sub-metre to centimetre-level positioning and is field upgradeable to all OEM7 family software options. These options include ALIGN for precise heading and relative positioning, GLIDE for decimetre-level pass-to-pass accuracy, SPAN GNSS+INS technology for continuous 3D position, velocity and attitude, and GNSS Resilience and Integrity Technology (GRIT) for advanced positioning protection. RTK delivers centimetre-level real-time positioning, or it can go base-free for centimetre and decimetre PPP solutions using TerraStar corrections.

To learn more about how our firmware solutions can enhance your positioning, visit novatel.com/products/firmware-options-pc-software/gnss-receiver-firmware-options.

Designed with the future in mind

The OEM719 can track all current and upcoming GNSS constellations including GPS, GLONASS, Galileo, BeiDou, QZSS and NavIC. It is software upgradeable to track modernised signals as they become available.

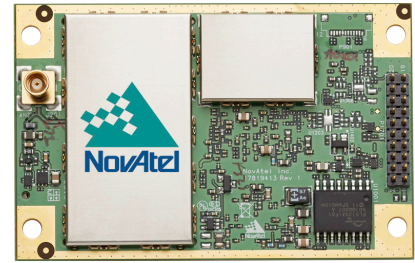

Features

- High position availability with multi-constellation, multi-frequency tracking and high data rate
- TerraStar Correction Services supported over multi-channel L-Band and IP connections
- Spoofing detection, interference detection and mitigation provided by GRIT
- RTK, GLIDE and STEADYLINE firmware options
- Simple to integrate, small form factor with 20 g vibration performance rating
- Compatible with existing OEM615 and OEM617 integrations
- SPAN GNSS+INS technology integration bridges 3D positioning through GNSS outages in difficult environments

Performance¹**Signal tracking**

GPS	L1 C/A, L1C, L2C, L2P, L5
GLONASS ²	L1 C/A, L2 C/A, L2P, L3, L5
Galileo ³	E1, E5 AltBOC, E5a, E5b, E6
BeiDou	B1I, B1C, B2I, B2a, B2b, B3I
QZSS	L1 C/A, L1C, L1S, L2C, L5, L6
NavIC (IRNSS)	L5
SBAS	L1, L5
L-Band	up to 5 channels

Horizontal position accuracy (RMS)

Single point L1	1.5 m
Single point L1/L2	1.2 m
SBAS ⁴	60 cm
DGPS	40 cm
TerraStar-L ⁵	40 cm
TerraStar-C PRO ⁵	2.5 cm
TerraStar-X ⁵	2 cm
RTK	1 cm + 1 ppm
Initialization time	< 10 s
Initialization reliability	> 99.9%

Maximum data rate

Measurements	up to 100 Hz
Position	up to 100 Hz

Time to first fix

Cold start ⁶	< 39 s (typ)
Hot start ⁷	< 20 s (typ)

Signal reacquisition

L1	< 0.5 s (typ)
L2	< 1.0 s (typ)

Time accuracy⁸ 20 ns RMS**Velocity accuracy** < 0.03 m/s RMS**Velocity limit⁹** 515 m/s**Physical and electrical****Dimensions¹⁰** 46 x 71 x 11 mm**Weight** 31 g**Power**
Input voltage 3.3 VDC ±5%**Power consumption¹¹**
GPS L1 0.9 W (typ)
GPS/GLONASS L1/L2 1.3 W (typ)
All frequencies/All constellations with L-Band 1.8 W (typ)**Antenna port power output**Output voltage 5 VDC ±5%
Maximum current 200 mA**Connectors**Main 20-pin dual row male header
Antenna input see *RF connector variants***RF connector variants**OEM719 MCX female
OEM719A MCX 90° female
OEM719B MMBX female**Communication ports**3 LVCMOS serial up to 460,800 bps
2 CAN Bus 1 Mbps
1 USB 2.0 (device) FS**Environmental****Temperature**Operating -40°C to +85°C
Storage -55°C to +95°C**Humidity** 95% non-condensing**Vibration**Random MIL-STD-810G (CH1), Method 514.7 (Cat 24, 20 g RMS)¹²
Sinusoidal IEC 60068-2-6**Bump** ISO 9022-31-06 (25 g)**Shock**Operating MIL-STD-810G (CH1), Method 516.7 (40 g)
Non-operating MIL-STD-810G (CH1), Method 516.7 (75 g)-Survival**Acceleration**

Operating MIL-STD-810G (CH1), Method 513.7 (16 g)

Compliance

FCC, ISED, CE and Global Type Approvals

Features

- Field upgradeable software
- Differential GNSS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, 3.2, 3.3, 3.4, CMR, CMR+, RTCA and NOVATELX
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Receiver Autonomous Integrity Monitoring (RAIM)
- GLIDE and STEADYLINE smoothing algorithms
- Outputs to drive external LEDs
- 2 Event inputs
- 1 Event output
- Pulse Per Second (PPS) output

Firmware solutions

- ALIGN
- GNSS Resilience and Integrity Technology (GRIT)
- SPAN GNSS+INS technology
- RTK
- RTK ASSIST
- TerraStar Correction Service
- API

Optional accessories

- VEXXIS GNSS-500 and GNSS-800 series antennas
- Compact GNSS antennas
- Mechanical mounting rails
- OEM7 Development Kit
- NovAtel Application Suite

1. Typical values. Performance specifications subject to GNSS system characteristics, Signal-in-Space (SIS) operational degradation, ionospheric and tropospheric conditions, satellite geometry, baseline length, multipath effects and the presence of intentional or unintentional interference. 2. Hardware ready for L5. 3. E1bc and E6bc support only. 4. GPS-only. 5. Requires a subscription to a TerraStar data service. Subscriptions available from NovAtel. 6. Typical value. No almanac or ephemerides and no approximate position or time. 7. Typical value. Almanac and recent ephemerides saved and approximate position and time entered. 8. Time accuracy does not include biases due to RF or antenna delay. 9. Export licensing restricts operation to a maximum of 515 meters per second, message output impacted above 500 m/s. 10. On the OEM719A, the MCX connector extends an additional 2.06 mm (0.081") from the board (71 mm dimension). 11. Typical values using serial port communication without interference mitigation. Consult the OEM7 User Documentation for power supply considerations. 12. Requires mechanical mounting rails to meet 20g; 7.7 g without rails.

Contact Hexagon | NovAtel

sales.nov.ap@hexagon.com 1-800-NOVATEL (U.S. and Canada) or 403-295-4900 | China: 0086-21-68882300 | Europe: 44-1993-848-736 | SE Asia and Australia: 61-400-883-601. For the most recent details of this product: novatel.com

ALIGN, GLIDE, NovAtel, OEM7, RTK ASSIST, SPAN, STEADYLINE, TerraStar and VEXXIS are trademarks of NovAtel, Inc., entities within the Hexagon Autonomy & Positioning division, their affiliated entities, and/or their licensors. All other trademarks are properties of their respective owners.

©2022 NovAtel Inc. All rights reserved. NovAtel is part of Hexagon. NovAtel makes no representation or warranty regarding the accuracy of the information in this publication. This document gives only a general description of the product(s) or service(s) offered by NovAtel, and, except where expressly provided otherwise, shall not form part of any contract. Such information, the products and conditions of supply are subject to change without notice.