

Wide Band Solid State Power Amplifier 1GHz - 8GHz



Product Description

RFLUPA01G08GC is a wideband solid state power amplifier with a frequency range of 1 to 8GHz.

The power output of this amplifier is 46dBm typical. The typical small signal gain is 54dB with a gain flatness of ± 2.0 dB. This power amplifier works with a +28VDC power supply.

The power amplifier's input and output connectors are SMA.

The operating temperature of this product is -40 to +70°C.

Features

- Wideband Solid State Power Amplifier
- Gain: 54dB typical
- Output power +46dBm typical
- Supply Voltage: +28V
- 50 Ohm Matched Input/Output
- Overtemperature Protection
- Overcurrent Protection

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications, TA = +25°C, Vcc = +28V

Parameter	Min.	Typ.	Max.	Units
Frequency Range	1		8	GHz
Gain	48	54		dB
Gain Flatness		± 2.0		dB
Gain Variation Over Temperature(-40°C~+70°C)		± 2.0		dB
Input VSWR		1.3	2.0	: 1
Output 1dB Compression Point (P1dB)		42		dBm
Saturated Output Power (Psat)	44.5	46		dBm
Supply Current (Vcc=+28V)		5	10	A
Power Added Efficiency (PAE)		10		%
Turn On/Off Speed (Switch Disable)	ON	50		ns
	OFF	60		ns
Turn On/Off Speed (Drain Disable)	ON	30		us
	OFF	200		us
Turn On/Off Speed (Gate Disable)	ON	250		us
	OFF	100		us
Weight	Net	1.63		lbs.
	Including Heat sink	7.17		lbs.
Impedance		50		Ohms
Input / Output Connectors		SMA-Female		
Package Sealing		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Parameter	Rating
Operating Voltage	+30V
RF Input Power	Psat – Large Signal Gain

Bias Up Procedure

1. Connect Ground Pin
2. Connect input and output
3. Connect +28V biasing

Bias Down Procedure


1. Turn off +28V biasing
2. Remove RF connection
3. Remove Ground.

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +70°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +70°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Typical Performance Plots


Gain @ +25°C

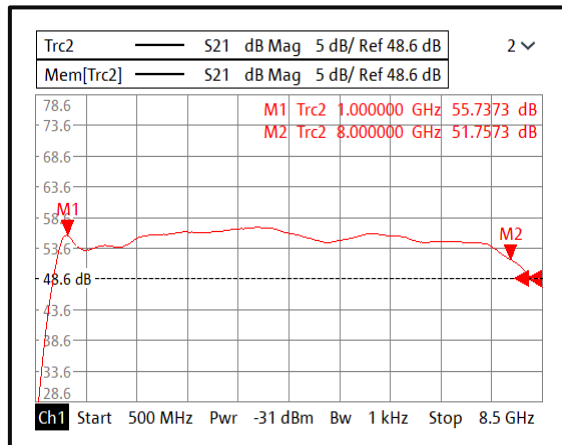


Input VSWR @ +25°C

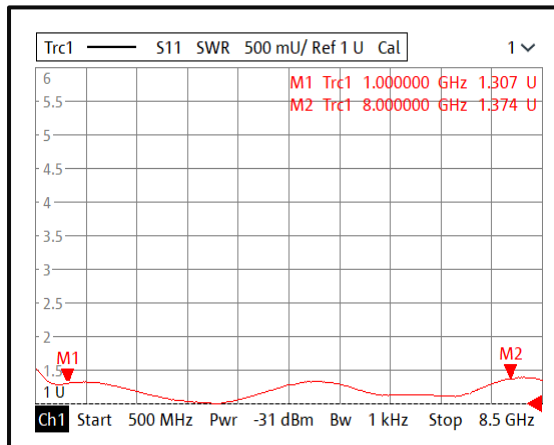


Isolation @ +25°C

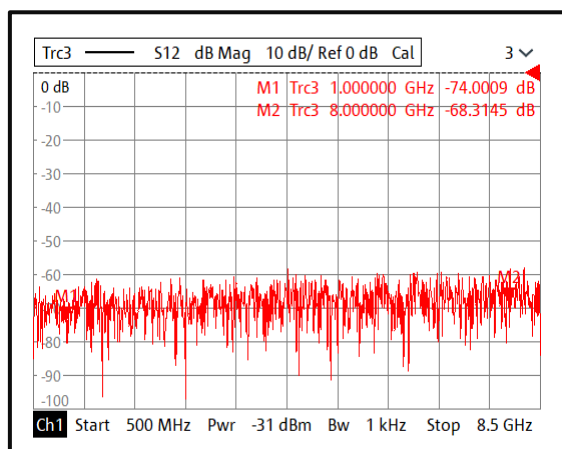


Gain @ -40°C

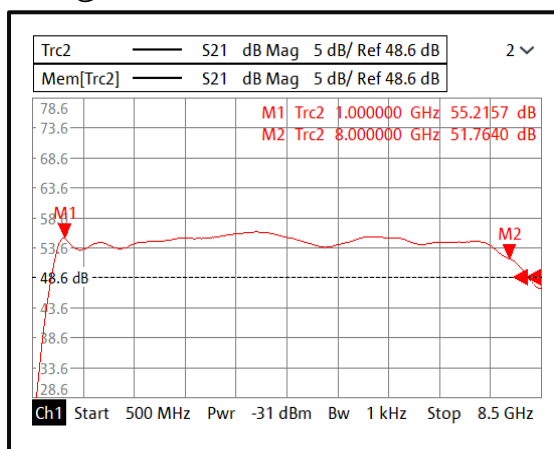

Input VSWR @ -40°C

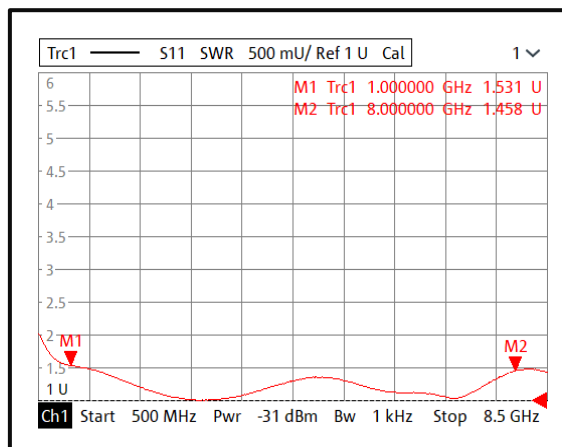


Isolation @ -40°C

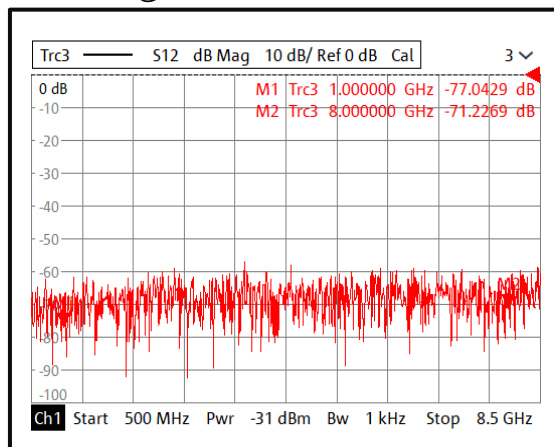


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain @ +70°C

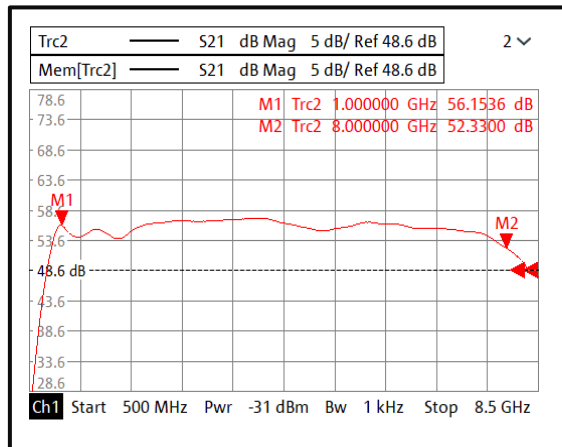

Input VSWR @ +70°C

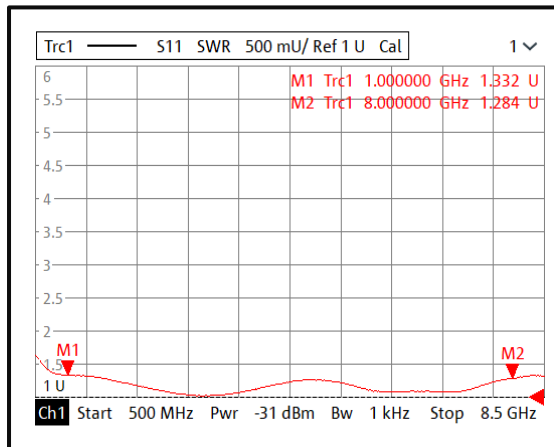


Isolation @ +70°C

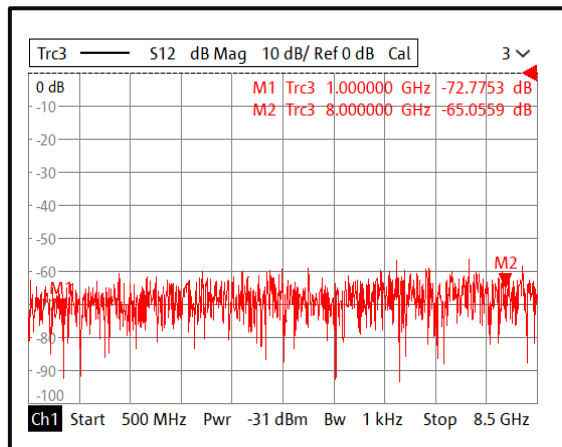


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain vs. Output Power CW

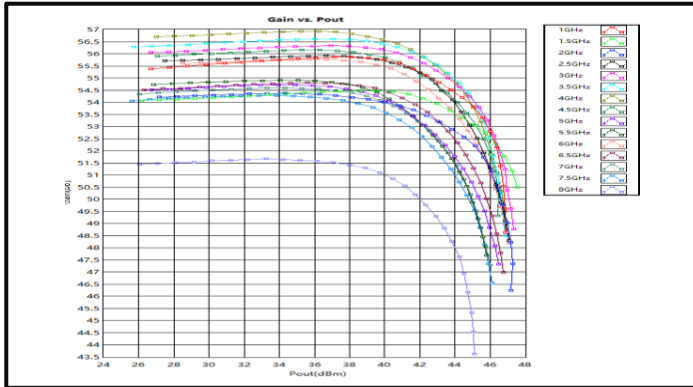


PndB vs. Frequency CW

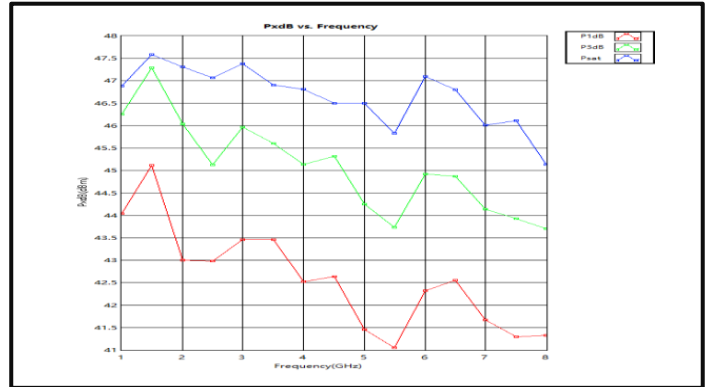


Power Added Efficiency CW

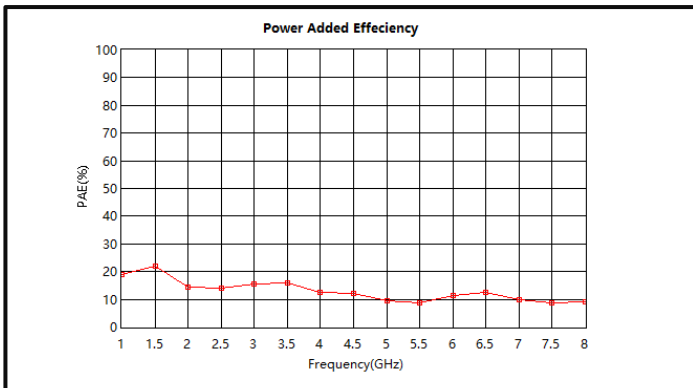


Saturation Power vs. Frequency CW

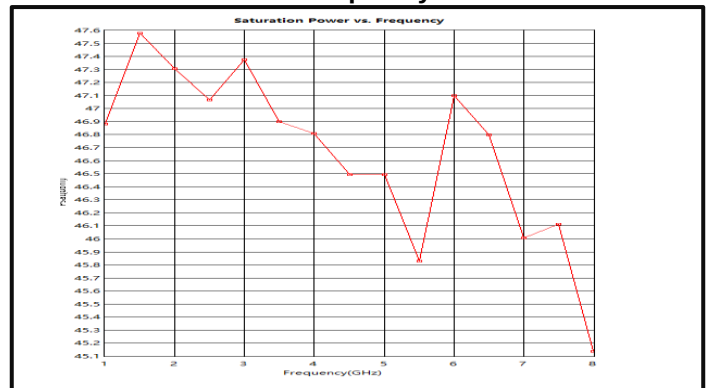

Pout vs. Pin CW

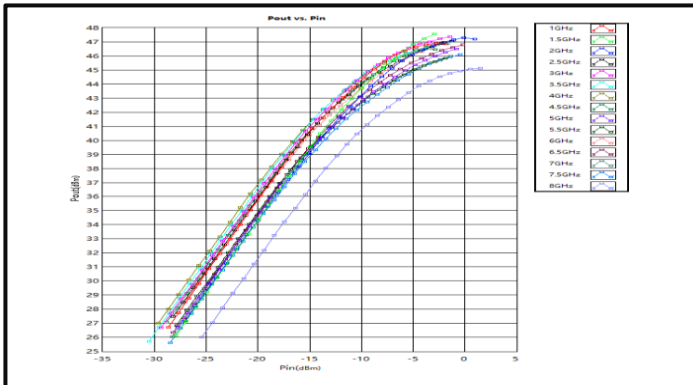


Current vs. Pout CW

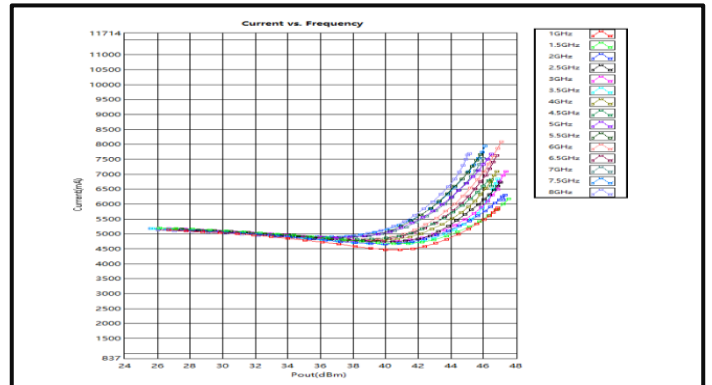


Typical Performance Plots


Left IM3 vs. Pout

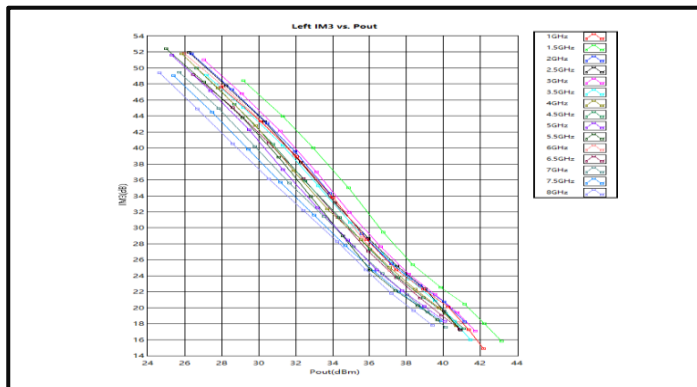


Right IM3 vs. Pout

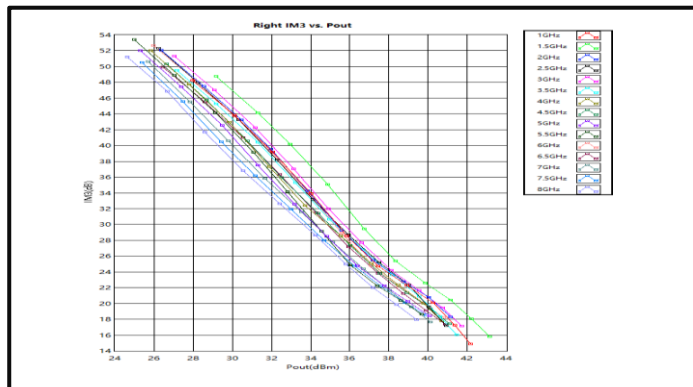


Delta IM3 vs. Pout

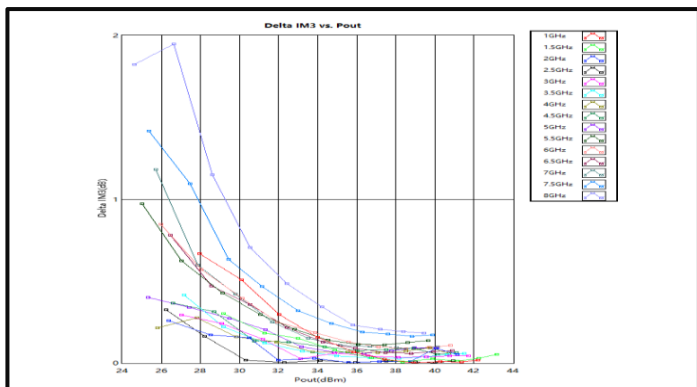


2nd Harmonic Wave Output Power

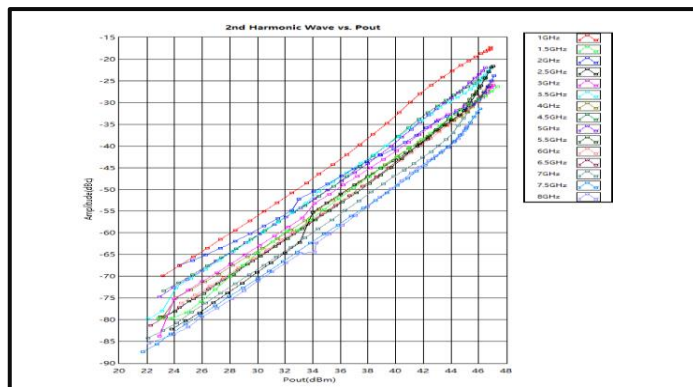

3rd Harmonic Wave Output Power

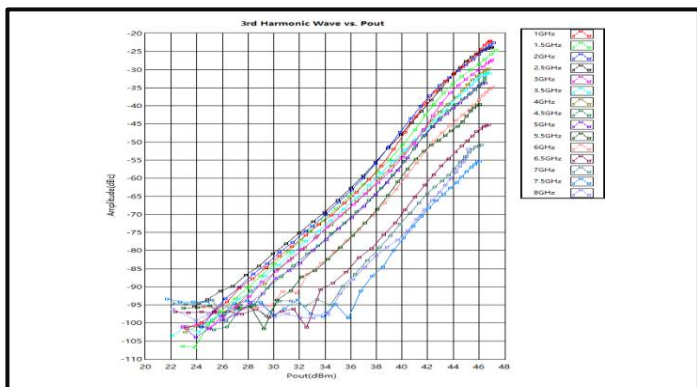


4th Harmonic Wave Output Power

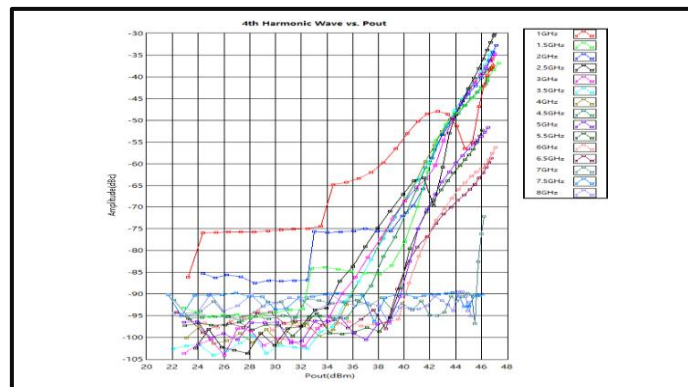


Note: IM3 test performed with 1MHz tone spacing

Typical Performance Plots

The RF Switch On Time is 50ns @+25°C

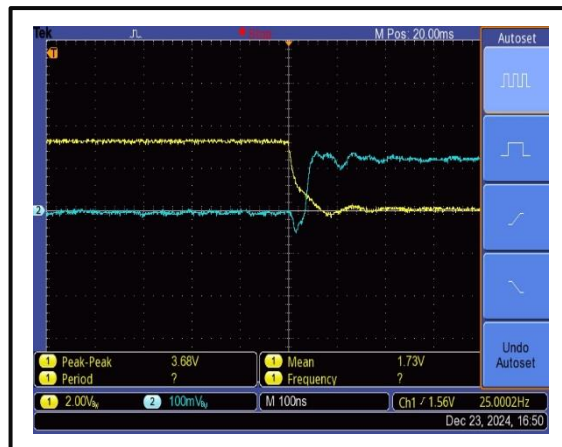

The RF Switch Off Time is 60ns @+25°C

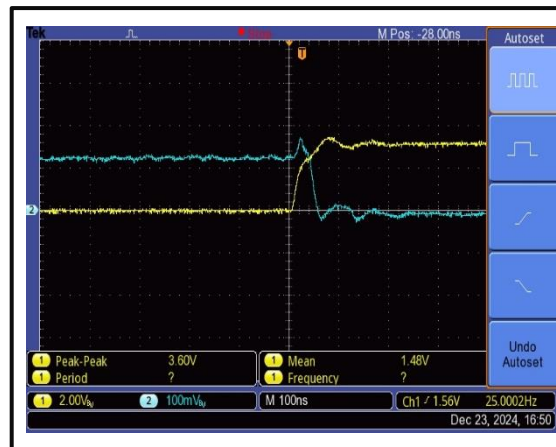

Switch control port: D-sub 17 PIN #4 (RF Input Switch) .

The yellow curve is the switch control signal, the blue curve is RF output envelope.

The Drains Open Time is 30us @+25°C




The Drains Closure Time is 200us @+25°C




The drain control port: D-sub 17 PIN #3 (Drain Disable).

The yellow curve is the drain control signal, the blue curve is RF output envelope.

The Gates Open Time is 250us @+25°C

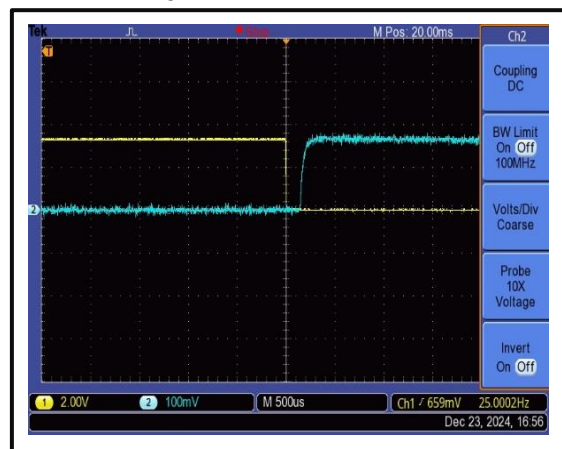

The Gates Closure Time is 100us @+25°C

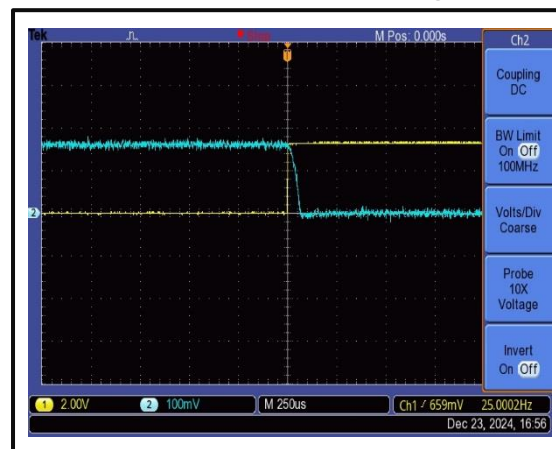


The gate control port: D-sub 17 PIN #2 (Gate Disable) .

The yellow curve is the gate control signal, the blue curve is RF output envelope.

Protection Connector Table

Male D-Sub is on the housing
The mating female part number: RFCBLADB17

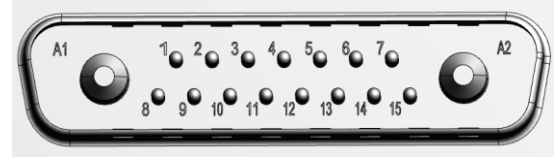


Pin #	Name	Function	Initial State	Description	Applied
A1	VCC	Power Supply	+28V	+28V DC is supply Voltage	Yes
A2	GND	Ground	GND	Ground	Yes
1	Reset	Control	HIGH	Resets PA when logic LOW is applied for five more seconds and released	Yes
2	Gate Disable	Control	LOW	Applying logic HIGH disables gate of amplifiers	Yes
3	Drain Disable	Control	LOW	Applying logic HIGH disables drain of amplifiers	Yes
4	RF Input Switch	Control	LOW	Applying logic HIGH turns off RF front-end switch to terminator	Yes
5	PA Off Alarm	Indicator	LOW	Pin will be latched to logic HIGH when any of the protection limit is reached	Yes
6	RF Input Over Drive	Indicator	LOW	Pin will be latched to logic HIGH when input signal is over limit	Yes
7	Temp Over	Indicator	LOW	Pin will be latched to logic HIGH when amplifier is driven over temperature	Yes
8	Current Over	Indicator	LOW	Pin will be latched to logic HIGH when drain current limit is reached	Yes
9	NC	NC	NC	NC	No
10	Current Imbalance	Indicator	LOW	Pin will be latched to logic HIGH when an imbalance in the drain current of the combining branches occurs	Yes
11	NC	NC	NC	NC	No
12	NC	NC	NC	NC	No
13	NC	NC	NC	NC	No
14	+5V	Power Supply	+5V	+5V DC is provided for reference *	Yes
15	GND	GND	GND	GND	Yes

Notes:

- HIGH/LOW voltages are standard TTL signals 0V to 0.8V = LOW. 2.8V to 5V = HIGH. Input current is 10uA.
- Matching connector and cable will be shipped with the product.
- Applied=Yes means the feature is included. Applied=No means the feature is not included with this model.


Alarm Status Panel

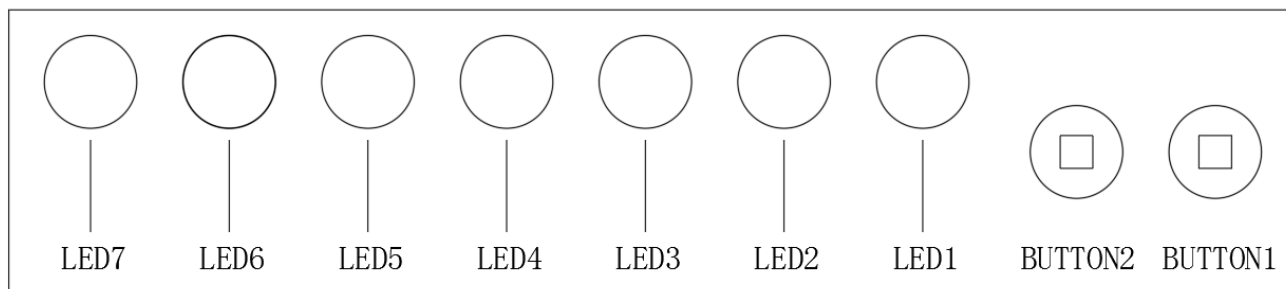

Name		Function	Initial State	Description	Applied
BUTTON1	Reset	Control		Manual reset button to reset PA	Yes
BUTTON2	Calibration	Control		Manual calibration button to correct PA	Yes
LED 1	Power	Indicator	GREEN Color	Power supply normal indicator	Yes
LED 2	RF ON/OFF	Indicator	GREEN Color	RF output status indicator. PA will shut down and latch this LED to a <u>RED</u> color when any protection is triggered *	Yes
LED 3	Calibration State	Indicator	GREEN Color	Calibration status indicator. The red light indicates that calibration is required. The indicator will flash during calibration *	Yes
LED 4	RF Input Over Drive	Indicator	GREEN Color	PA will shut down and latch this LED to a <u>RED</u> color when input signal is over limit *	Yes
LED 5	Over Current	Indicator	GREEN Color	PA will shut down and latch this LED to a <u>RED</u> color when current limit is reached *	Yes
LED 6	Current Imbalance	Indicator	GREEN Color	PA will shut down and latch this LED to a <u>RED</u> color when an imbalance in the drain current of the combining branches occurs *	Yes
LED 7	Over Temp	Indicator	GREEN Color	PA will shut down and latch this LED to a <u>RED</u> color when driven over temperature *	Yes

*LED needs to be manually reset to initial state by pressing RESET button

Outline Drawing

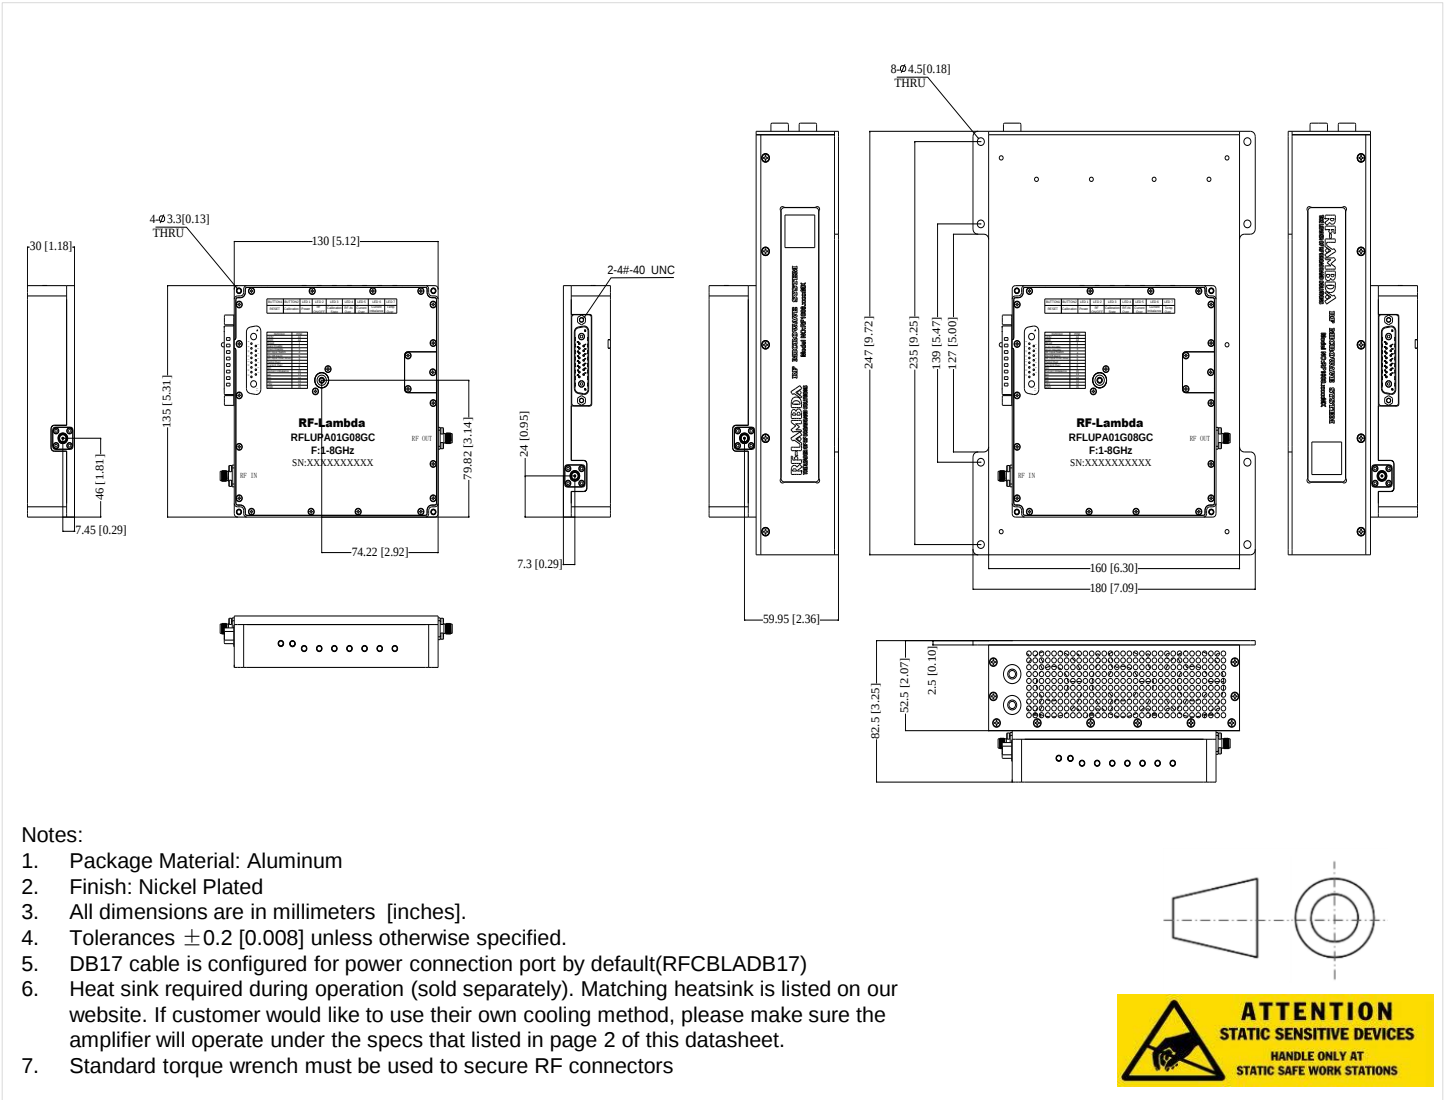

Packing List

ID	Description	QTY
1	Fig a. DB17 cable (RFCBLADB17)	1



Fig a.

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Heatsink Lookup Specifications	https://rflambda.com/search_heatsink.jsp
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFLUPA01G08GC	Standard	1GHz-8GHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.