


200W Hermetically Sealed Wide Band Solid State Power Amplifier 0.7GHz-2.7GHz

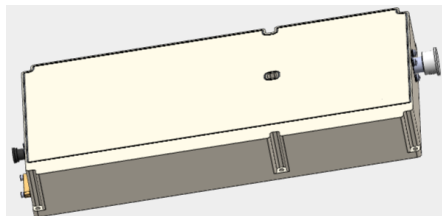

Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Features

- Hermetically Sealed Solid State Power Amplifier
- Small Signal Gain 57dB Typical
- Output Saturation Power 53dBm Typical
- Supply Voltage +36 VDC
- 50 Ohm Matched

Product Description

RFLUPA0727GB-H is a wide band hermetically sealed power amplifier with a frequency range of 0.7 to 2.7GHz.

The power output of this amplifier is 53dBm typical. The typical small signal gain is 57dB with a gain flatness of ± 2 dB. This power amplifier works with typically +36VDC power supply.

The power amplifier input connector is SMA-female and output connector is N-female.

The operating temperature of this product is -40 to +60°C.

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications ($T_A = +25^\circ\text{C}$)

Parameter	Min	Typ	Max	Units
Frequency Range	0.7		2.7	GHz
Small Signal Gain	55	57		dB
Gain Flatness		± 2.0	± 3.0	dB
Gain Variation Over Temperature (-40°C to +60°C)		± 2.5		dB
Input Return Loss		15		dB
Output 1dB Compression Point (P1dB)		50		dBm
Saturated Output Power (Psat)	51	53		dBm
3rd Order Intermodulation Product(IM3)		-35		dBc
Supply Current (Vcc=+36V)		5	23	A
Isolation S12		-55		dB
Power Added Efficiency (PAE)		25		%
Turn On/Off Speed (Drain Disable)	ON	18		ms
	OFF	2		
Turn On/Off Speed (Gate Disable)	ON	1000		us
	OFF	1000		
Weight	Net	/Max.		lbs.
	Including Heat Sink	/Max.		lbs.
Impedance		50		Ohms
Input / Output Connectors	SMA-Female(Input) – N-Female(Output)			
Package	Hermetically Sealed(Laser Sealed)			

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	+38VDC
*RF Input Power (RFIN)	Psat – Large Signal Gain

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load.
(In band VSWR < 1.9:1 or >10dB VSWR.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure

1. Turn off power supply
2. Remove positive supply Connection
3. Remove RF Connection
4. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +60°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +60°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.

**For vibration testing details please see additional information section.

Interface Connector

Male D-Sub is on the housing
The mating female part number: 1830006007

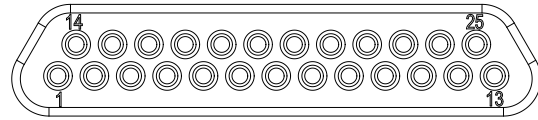


Pin #	Name	Function	Initial State	Description	Applied
9,10,11,12, 13,21,22,23 ,24,25	VDC	Power Supply	+36V	+36V DC is supply Voltage	Yes
6,7,8,18,19, 20	GND	Ground	GND	Ground	Yes
1	Reset	Control	HIGH	Resets PA when logic LOW is applied for five more seconds and released	Yes
2	Gate Disable	Control	LOW	Applying logic HIGH disables gate of amplifiers	Yes
3	Drain Disable	Control	LOW	Applying logic HIGH disables drain of amplifiers	Yes
4	PA Off Alarm	Indicator	LOW	Pin will be latched to logic HIGH when any of the protection limit is reached	Yes
5	RF Input Over Drive	Indicator	LOW	Pin will be latched to logic HIGH when input signal is over limit	Yes
14	Temp Over	Indicator	LOW	Pin will be latched to logic HIGH when amplifier is driven over temperature	Yes
15	Current Over	Indicator	LOW	Pin will be latched to logic HIGH when drain current limit is reached	Yes
16	Temp monitor	Indicator	Voltage	Analog voltage relative to module's temperature	Yes
17	+5V	Power Supply	+5V	+5V DC is provided for reference *	Yes

Notes:

- The alarm state means the internal power is turned off, and the current of 36V is less than 100mA.
- If the amplifier is in protect state, the amplifier can only work normally again by pulling low the Reset pin, or to turn off the +36V power to reset the amplifier.
- The monitor signals are optional and can be left floating.
- HIGH/LOW voltages are standard TTL signals 0 to 0.8V = LOW. 2.8V to 5V = HIGH

Outline Drawing

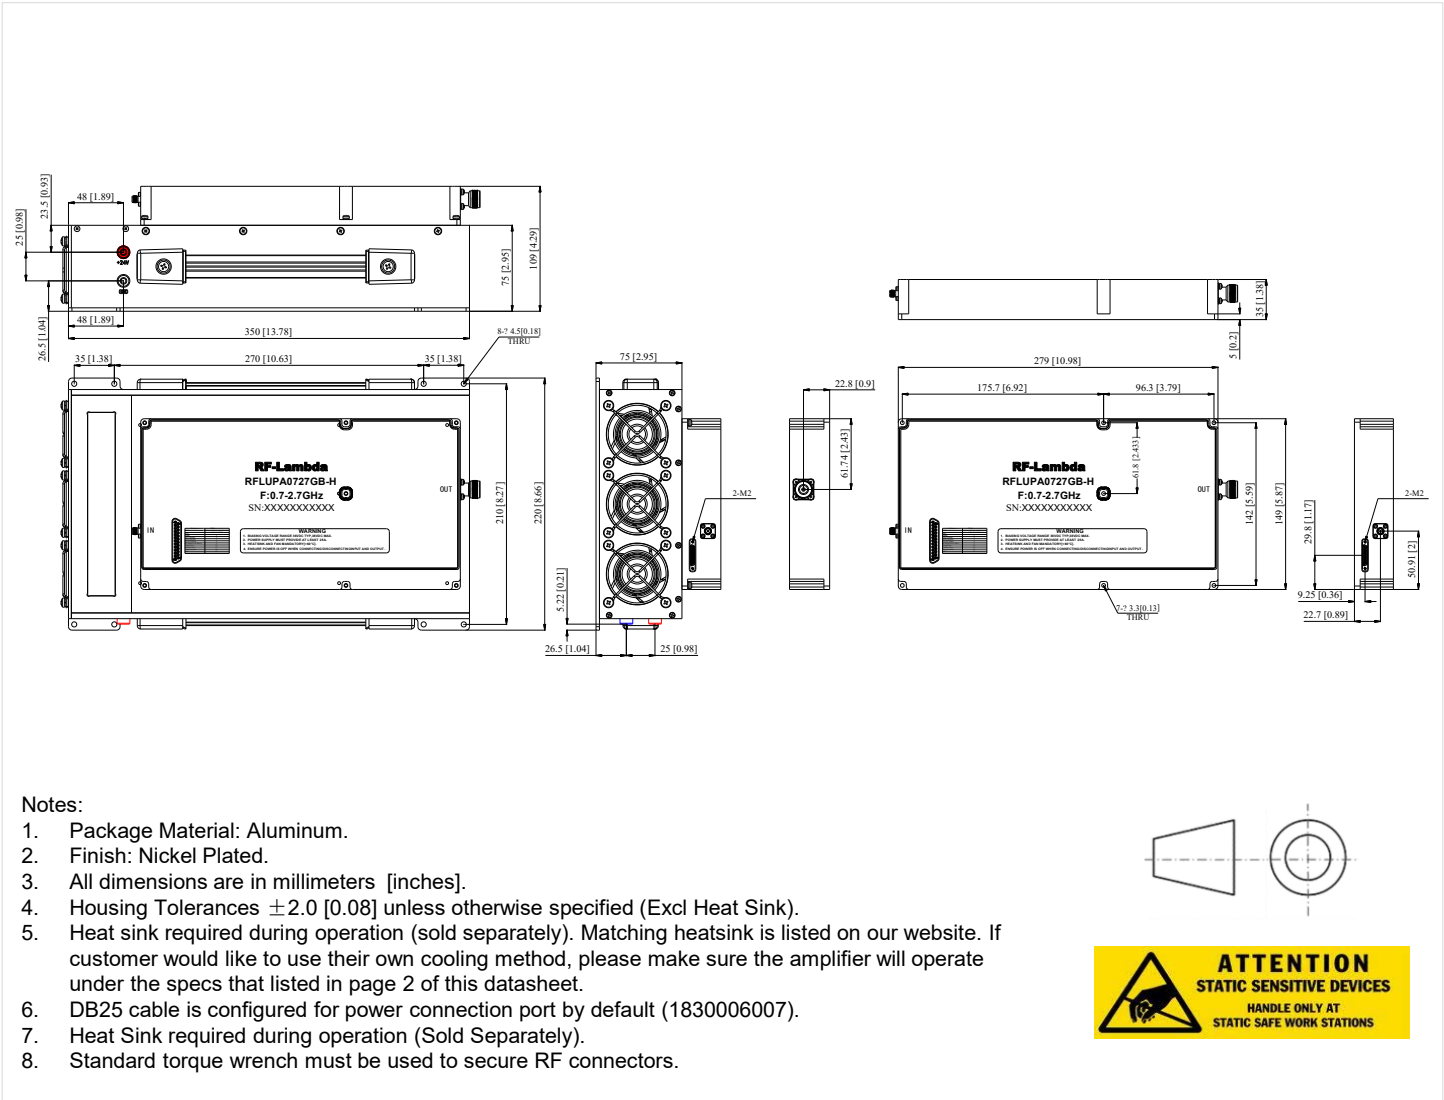

Packing List

ID	Description	QTY
1	Fig a. part number: 1830006008	1



Fig a.

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Heatsink Lookup Specifications	https://rflambda.com/search_heatsink.jsp
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFLUPA0727GB-H	Input Connector SMA-Female and Output Connector N-Female	0.7GHz-2.7GHz Hermetically Sealed Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or VSWR larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.