

50W Broadband High Power Amplifier Module 500MHz -2500MHz



Product Description

RFLUPA5M25MK is a broadband high power amplifier module with a frequency range of 500 to 2500MHz.

The power output of this amplifier is 47dBm typical. The typical small signal gain is 55dB with a gain flatness of ± 1.8 dB. This power amplifier works with a +28 VDC power supply.

The working temperature of this product is between - 40°C and 60°C.

Features

- High Power Amplifier
- Small Signal Gain 55dB Typical
- Output Saturation Power 47dBm Typical
- Supply Voltage +28VDC
- 50 Ohm Matched Input / Output

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C),VDD=+28VDC

Parameter	Min	Typ	Max	Units
Frequency Range	500		2500	MHz
Small Signal Gain	50	55		dB
Gain Flatness		± 1.8		dB
Gain Variation Over Temperature (-40°C~+60°C)		± 2.0		dB
Input VSWR		1.3	1.5	: 1
Saturated Output Power (P _{sat})	46	47		dBm
Harmonics @ POUT=30W		-15		dBc
Spurious Signals		-55		dBc
Isolation S12		-60		dB
Current Consumption @ POUT = 50W		4.5	7	A
Efficiency @ P _{sat}		30		%
Turn On/Off Speed (shutdown)	ON	500		us
	OFF	500		us
Weight	Net	1.25 Max.		lbs.
	Including Heat Sink	6.50 Max.		
Impedance		50		Ohms
Input / Output Connectors		SMA- Female / SMA- Female		
DC Interface Connector		D-Sub9-Pin (Male)		
Package		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Parameter	Rating
Operating Voltage	+32V
*RF Input Power (RFIN)	Psat – Large Signal Gain

Bias Up Procedure

1. Connect ground
2. Connect input and output with 50 Ohm source/load.
(In band VSWR < 1.9:1 or >10dB return loss.)
3. Connect positive supply and make sure power supply can handle max current.

Bias Down Procedure

1. Turn off power supply
2. Remove positive supply Connection
3. Remove RF Connection
4. Remove ground

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +60°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +60°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*Maximum RF input power is set to assure safety of amplifier. Input power may be increased at own risk to achieve full power of amplifier. Please reference gain and power curves.


**For vibration testing details please see additional information section.

Typical Performance Plots


Gain@+25°C

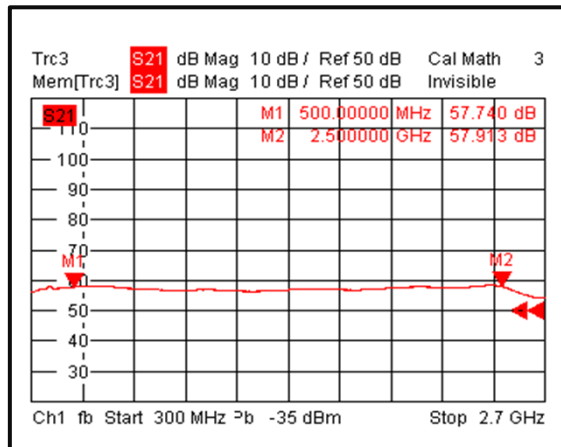


Input VSWR @+25°C

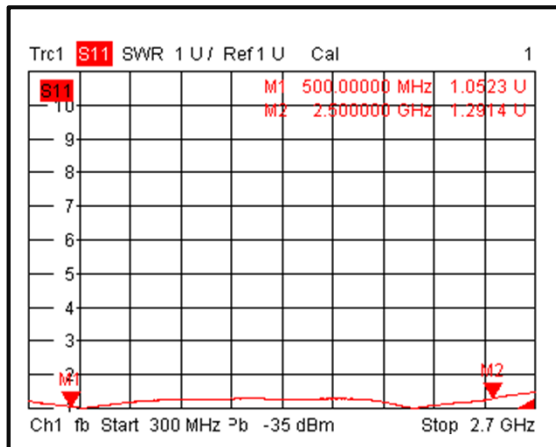


Isolation@+25°C

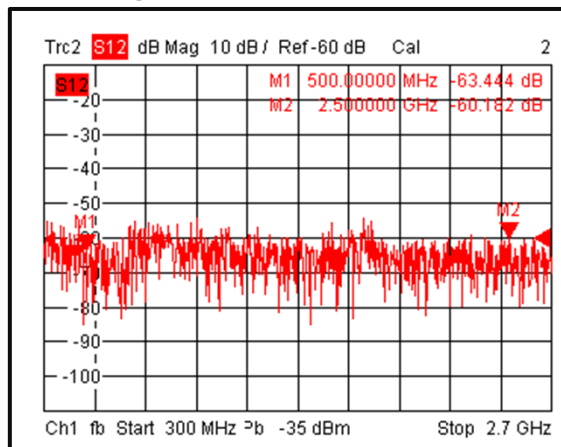


Gain@-40°C

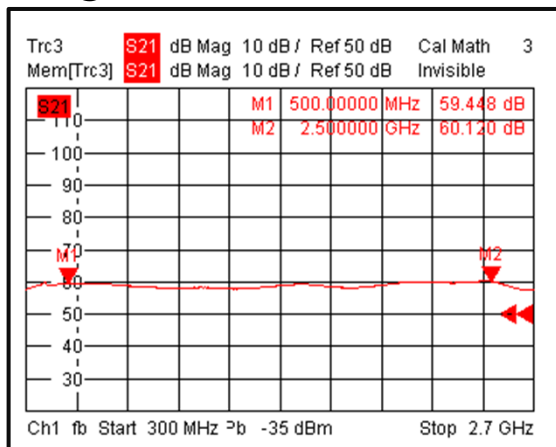

Input VSWR @-40°C

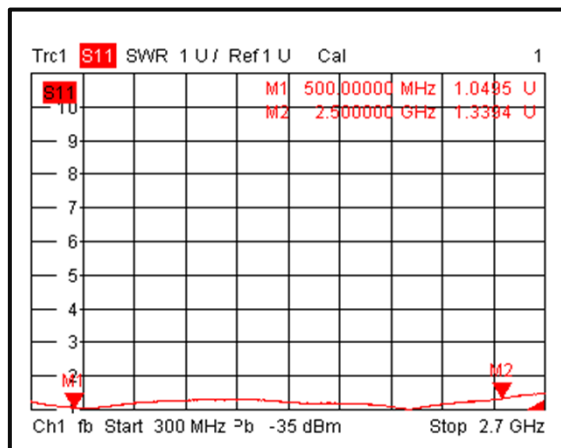


Isolation@-40°C

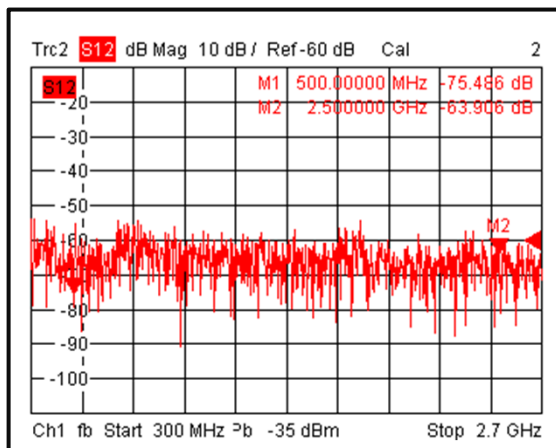


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain@+60°C

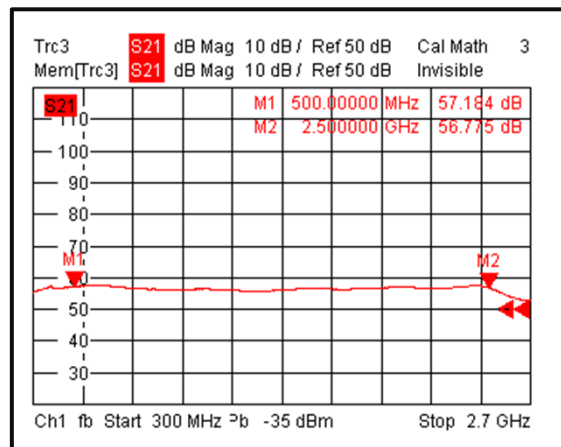

Input VSWR @+60°C

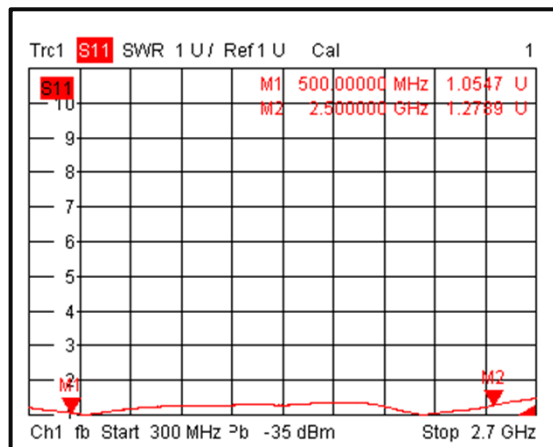


Isolation@+60°C

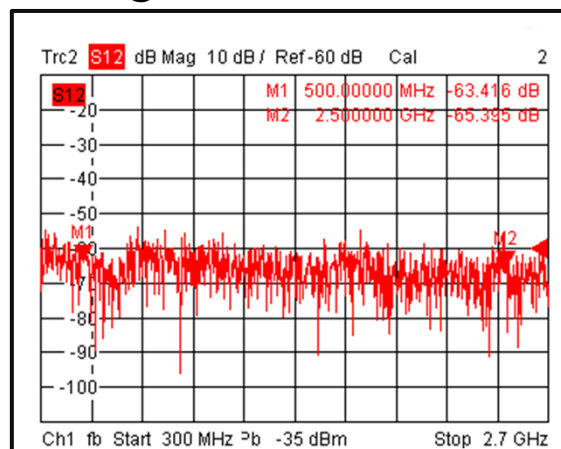


Note: Small signal VNA measurements include attenuators to protect equipment

Typical Performance Plots


Gain vs. Output Power CW

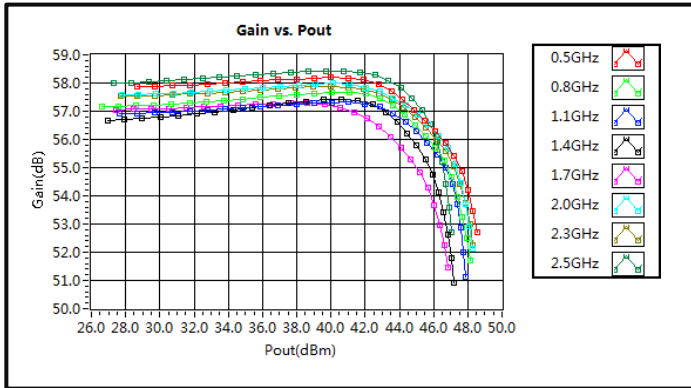


PndB vs. Frequency CW

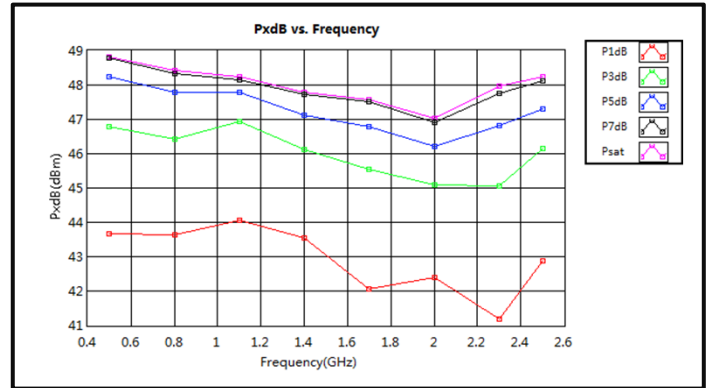


Power Added Efficiency CW

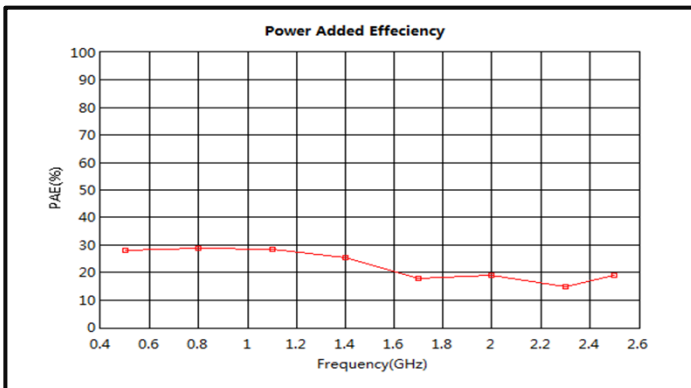


Saturation Power vs. Frequency CW

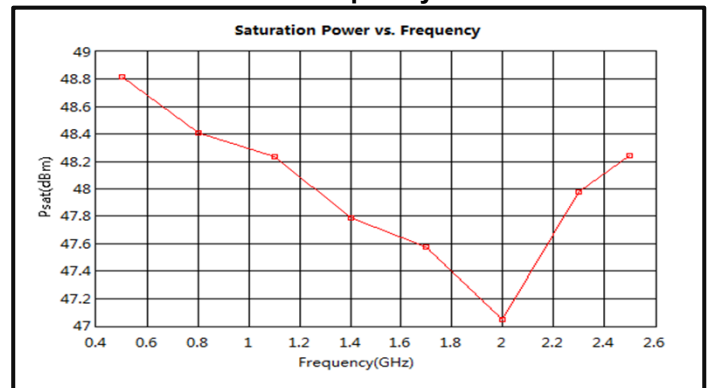

Pout vs. Pin

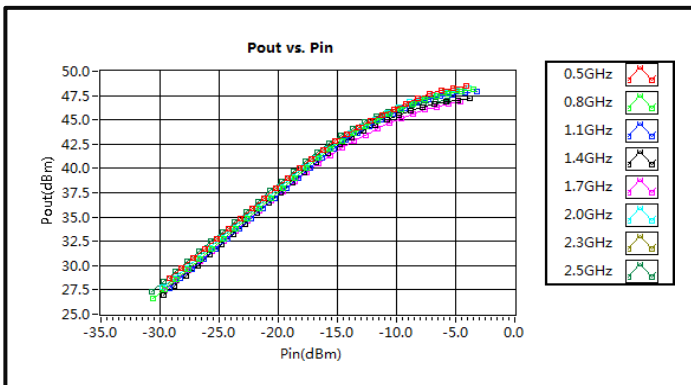


Current vs. Pout

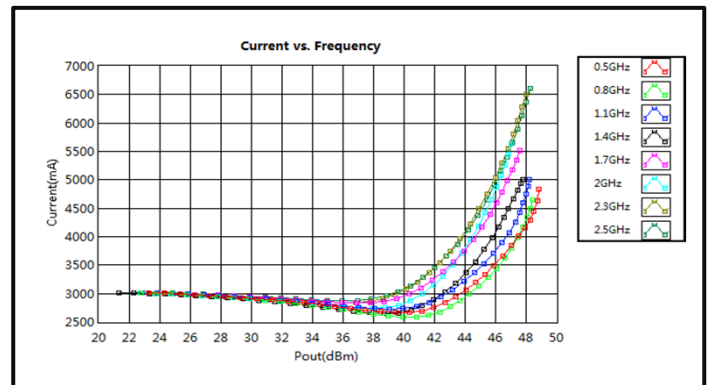


Typical Performance Plots


Left IM3 vs. Pout

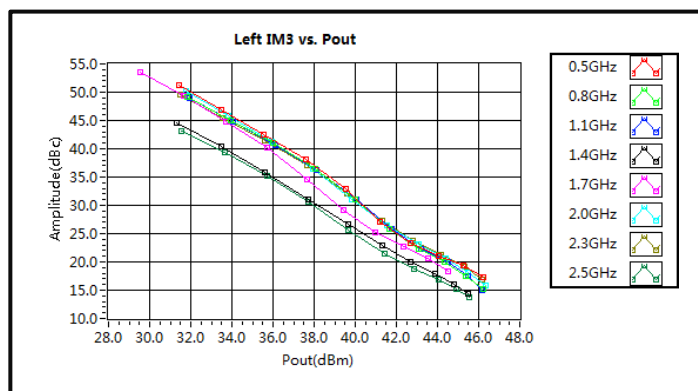


Right IM3 vs. Pout

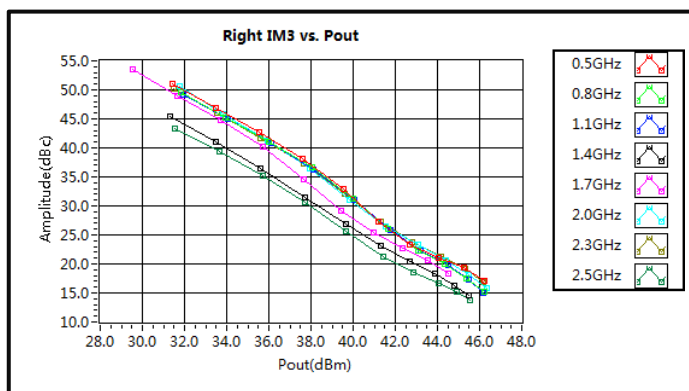


Delta IM3 vs. Pout

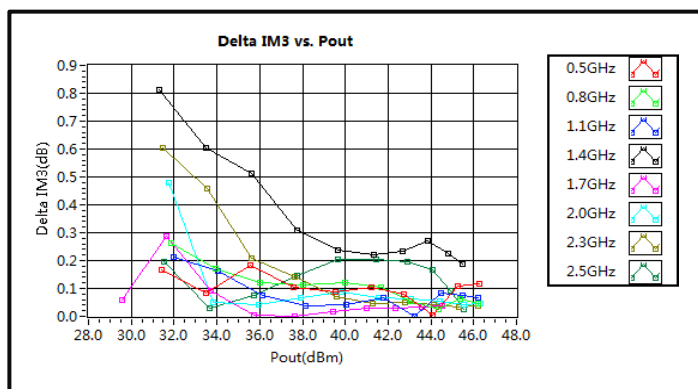


2nd Harmonic Wave Output Power

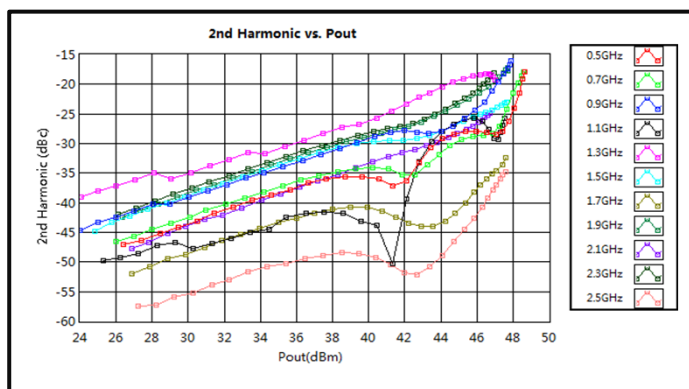

3rd Harmonic Wave Output Power

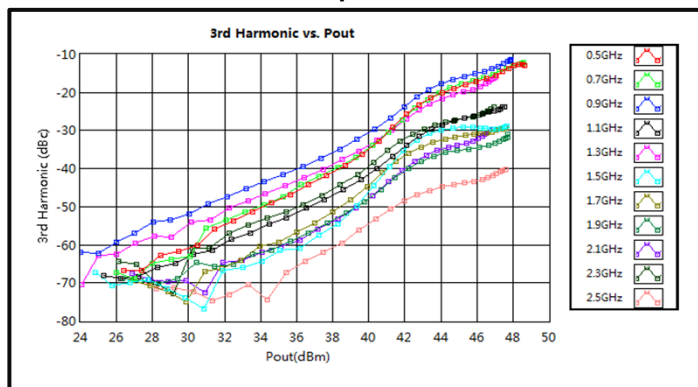


4th Harmonic Wave Output Power

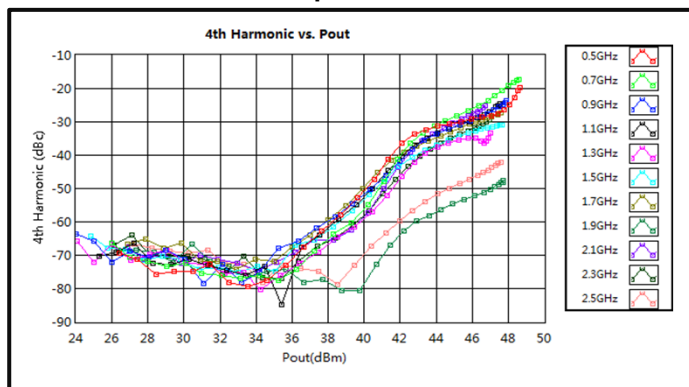


Note: IM3 test performed with 1MHz tone spacing

Typical Performance Plots

The Shutdown Rise Time is 500 us @+25°C

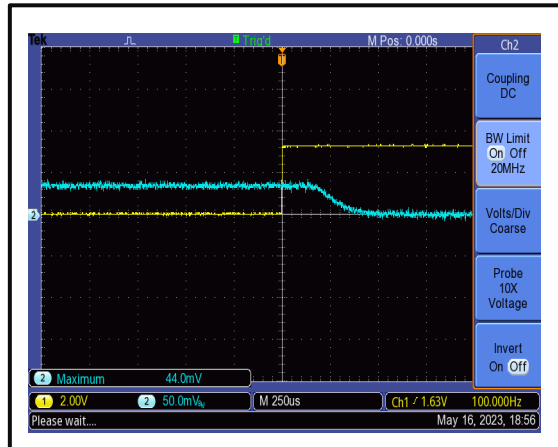


The Shutdown Fall Time is 500 us @+25°C

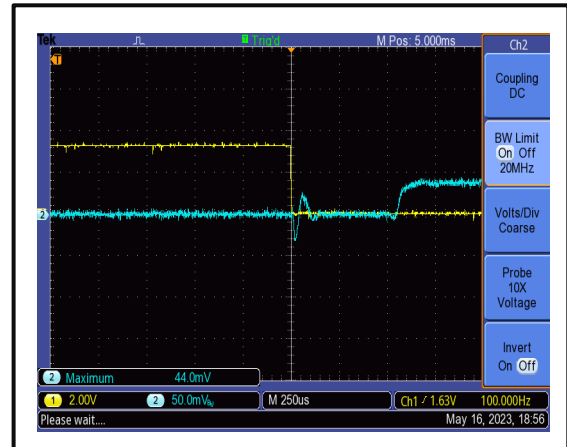

Switch control port: D-sub 9 PIN #3(shutdown).
The yellow curve is the switch control signal, the blue curve is RF output envelope.


DC Interface Connector

Male D-Sub is on the housing
The mating Female part number: 171-009-203L001

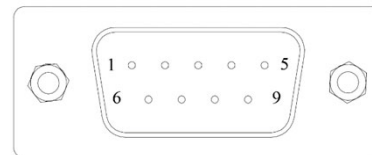

Pin #	Description	Specifications
1	N/C	No Connection
2	Alarm	Amplifier Alarm Indicator (Low = Normal Operation)
3	Shutdown	Shutdown = 3.3V (Internally Pulled-Low)
4	Temp Sense	Analog Voltage Relative to Module's Temperature Typical Value (-40°C@+5V, +25°C@+2.4V, +60°C@+0.9V)
5	Current Monitor	Analog Voltage Relative to IDD @ 100mV per A
6,7	VDD	+28VDC
8,9	GND	Ground

Outline Drawing

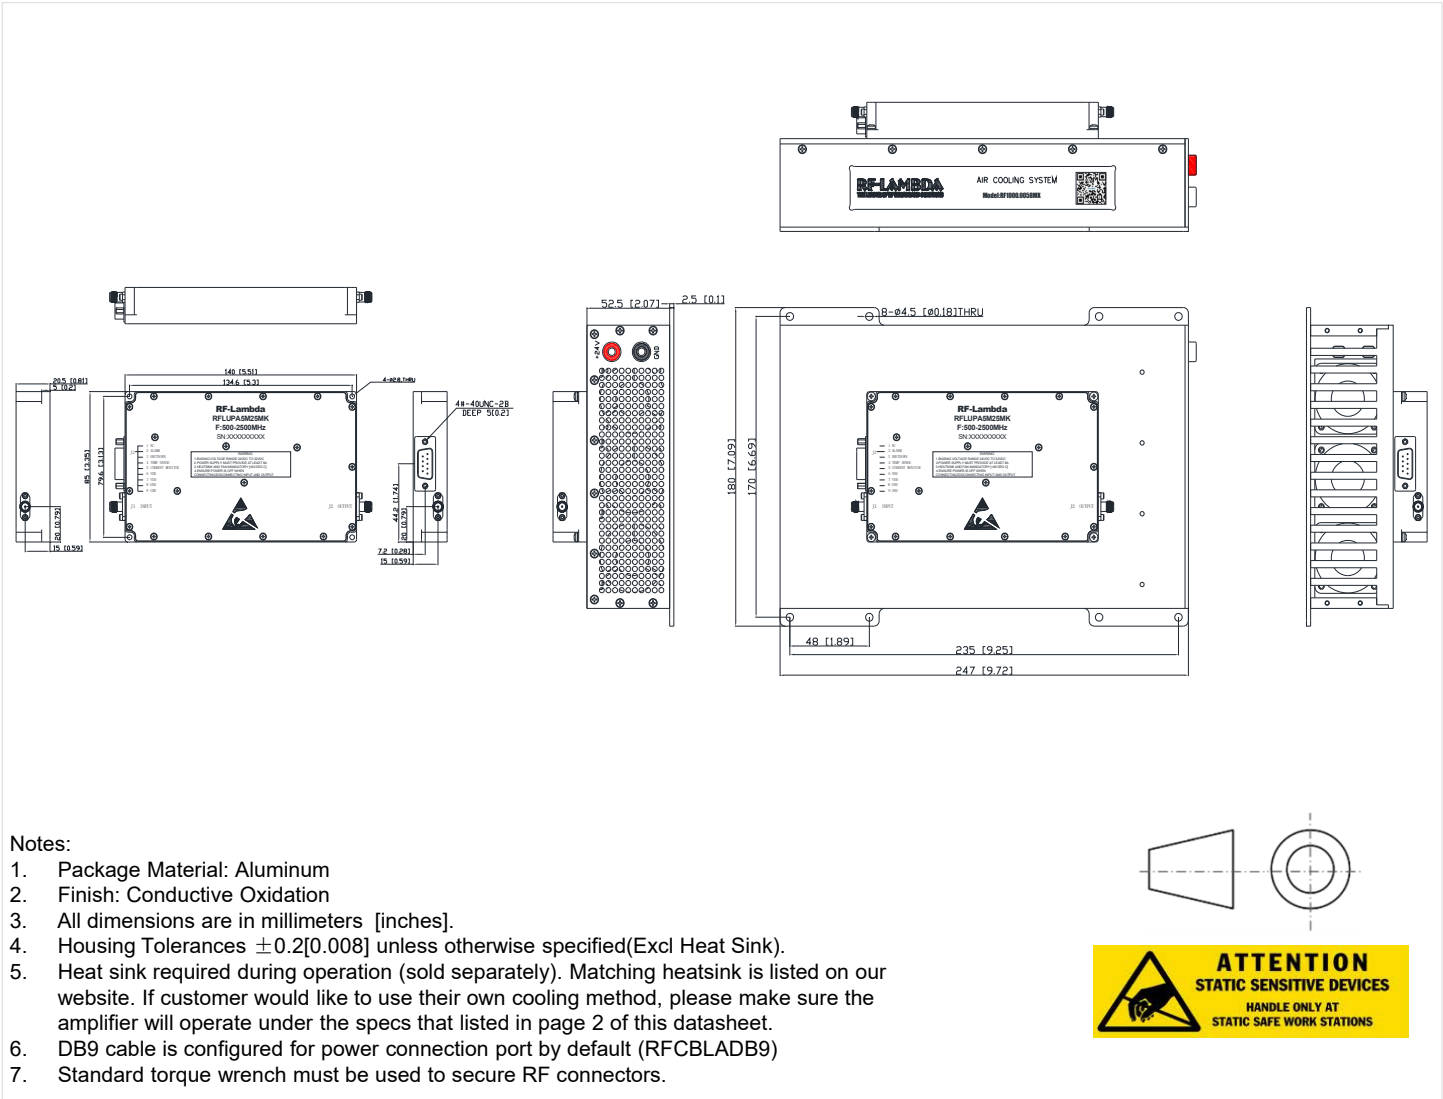

Packing List

ID	Description	QTY
1	Fig a. DB9 cable (RFCBLADB9)	1
2	Fig b. Screws (#4-40*5+6)	2



Fig a.



Fig b.

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Heatsink Lookup Specifications	https://rflambda.com/search_heatsink.jsp
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFLUPA5M25MK	Standard	500MHz-2500MHz Power Amplifier

Amplifier Use

Ensure that the amplifier input and output ports are safely terminated into a proper 50 ohm load before turning on the power. Never operate the amplifier without a load. A proper 50 ohm load is defined as a load with impedance less than 1.9:1 or return loss larger than 10dB relative to 50 Ohm within the specified operating band width.

Power Supply Requirements

Power supply must be able to provide adequate current for the amplifier. Power supply should be able to provide 1.5 times the typical current or 1.2 times the maximum current (whichever is greater).

In most cases, RF - Lambda amplifiers will withstand severe mismatches without damage. However, operation with poor loads is discouraged. If prolonged operation with poor or unknown loads is expected, an external device such as an isolator or circulator should be used to protect the amplifier.

Ensure that the power is off when connecting or disconnecting the input or output of the amp.

Prevent overdriving the amplifier. Do not exceed the recommended input power level.

Adequate heat-sinking required for RF amplifier modules. Please inquire.

Amplifiers do not contain Thermal protection, Reverse DC polarity or Over voltage protection with the exception of a few models. Please inquire.

Proper electrostatic discharge (ESD) precautions are recommended to avoid performance degradation or loss of functionality.

What is not covered with warranty?

Each RF - Lambda amplifier will go through power and temperature stress testing.

Since the die, ICs or MMICs are fragile, these are not covered by warranty. Any damage to these will NOT be free to repair.

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.