

USB / Ethernet Absorptive Coaxial SP2T Switch 0.02GHz-3GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Features

- USB / Ethernet Control
- Control SW included.
- Low Power Cold Switching
- Insertion Loss 1.5dB
- Isolation 80dB
- 50 Ohm Matched

Product Description

RFSP2TA0003GUSB is an absorptive USB / ethernet controlled coaxial single pole two throw switch with a frequency range of 0.02 to 12GHz.

The power input of this switch is 30dBm max. The insertion loss is 1.0dB with a typical isolation of 80dB.

This product features fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), USB Powered


Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		0.02- 3			3-12		GHz
Insertion Loss		1.0	2.0		3.8	4.2	dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ °C
Isolation	70	85		65	70		dB
Input VSWR		1.3	1.5		1.5	1.8	: 1
Output VSWR		1.3	1.5		1.5	1.8	: 1
RF Input Power (CW)			30			30	dBm
DC Power Dissipation			0.6				W
IIP3		48			45		dBm
Current			210 Typ.				mA
Power Supply			USB(+5.0V)				
Control Interface			USB2.0 & Ethernet(IPv4) (Control Cable Included)				
Weight			0.185 Max.				lbs
Impedance			50				Ω
Input / Output Connectors			SMA-Female(Input) – SMA-Female(Output)				
Package			Epoxy Sealed (Standard)				
			Hermetically Sealed (Optional)				

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


*For vibration testing details please see additional information section.

Outline Drawing

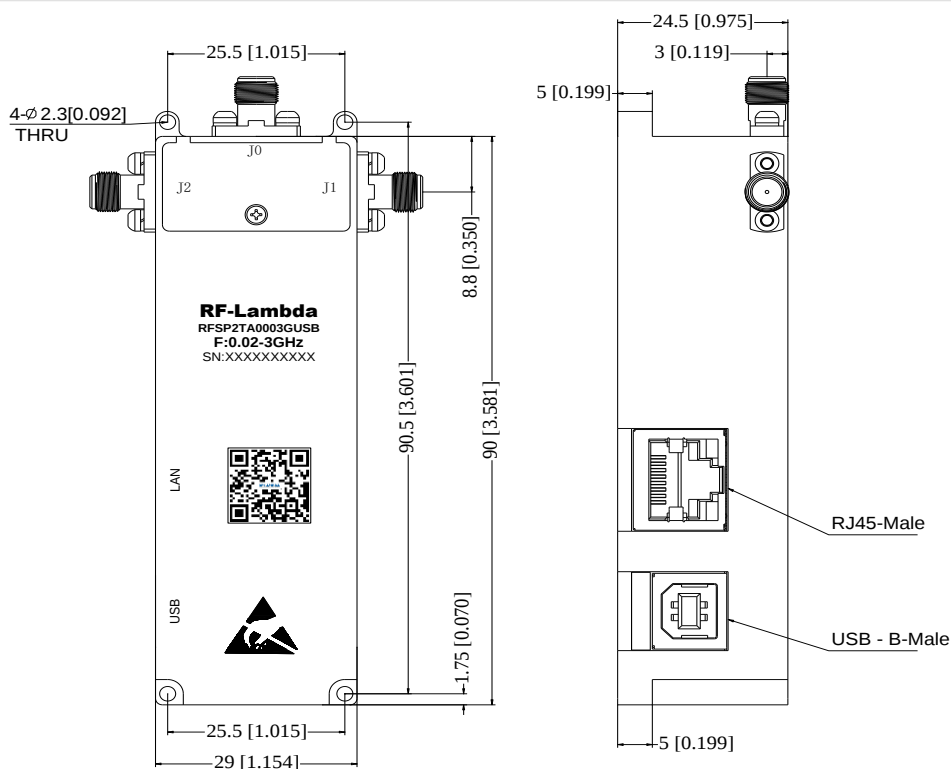

Notes:

1. Package Material: Aluminum
2. Finish: Nickel Plated
3. All dimensions are in millimeters [inches].
4. Outline Tolerances ± 0.15 [0.006] Mounting Holes Tolerances ± 0.1 [0.004] unless otherwise specified.
5. Standard torque wrench must be used to secure RF connectors.



Packing List

ID	Description	QTY
1	Fig a. USB/Ethernet Control RF Switch	1
2	Fig b. USB2.0 Cable (5 feet / 1.5 meter)	1
3	Fig c. Network Cable (6 feet / 2 meter)	1



Fig b.



Fig c.

Control Content Description

Format Requirement	USB (virtual serial port) Configuration	LAN Interface	Range of Parameters
a. All commands must end with a semicolon. b. All commands are case - insensitive. c. Comma is used to separate multiple parameters in commands. d. All commands are suitable for USB(virtual serial port) and LAN interface.	Baud Rate :115200 Data bits : 8 Parity : None Stop bits : 1 Flow Type :None	IP address and Port. Default:192.168.1.225:5100 Use 'USB Control Panel.exe' to set.	x(channel):1~n. y(period ,ms): 0.01~2000 z(pulse ,ms): 0.01~2000

Command Specification

ID	Order	Description	Return	Example
1	*IDN?;	Query product information	Product PN ,SN, Manufacturer , version	*IDN?;
2	Reset;	Reset the product	/	Reset;
3	SW:Sopen x;	Open channel x	SOx	SW:Sopen 2; Return : SO2
4	SW:Sloop x,y,z;	Automatic cycle opening channel x with period as y (ms) and pulse width as z(ms)	SLx	SW:Sloop 2,0.1,0.05; Return :SL2
5	SW:Mloop x1,x2,...,z;	Cycle on channels x1, x2,... with pulse width as z(ms)	MLx1	SW:Mloop 1,2,0.1; Return :ML1
6	SW:Close;	Close all channel. Stop loop ,close all channel.	SC0	SW:Close; Return: SC0

Error Code Query

ID	Return	Description
1	E1	Semicolon missing
2	E2	Incorrect commands
3	E3	Missing space
4	E4	Incorrect parameter format
5	E5	Out of range parameters

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Download Quit Continue >>

Select Device

Digital Control Switch

Digital Control Attenuator

Digital Control Phase Shifter

Control Interface

USB

ETHERNET

Please select a COM port COM62

Connect Device

The device number is: 2020041100151
Device IP:192.168.1.225:5100

Note

1. Please refer to the product manual for power supply.
2. Please refer to the product manual to configure the port.

2020.03 v2.01

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

<< Goback

Select Path

J0 J1

Manual Control ☒ **Single Channel Auto Cycle** ☐

OFF

Pulse Period(ms) 10.00
Pulse Width(ms) 5.000

Start

Multi Channel Auto Cycle ☐


J1 J2 J3 J4 Use Input ☐
J5 J6 J7 J8
Input the channel which you want to use,
Separated by commas. For example: 3,1,6,7

Pulse Width(ms) 0.100 Start

Device Name: Digital Control Switch
Part Number: RFSP4TA5M50GUSB
Serials Number: 2020041100151
Control Model: USB
Control Port: COM62

Send String SW:Sopen 1;
Recevie String S01

2020.03 v2.01

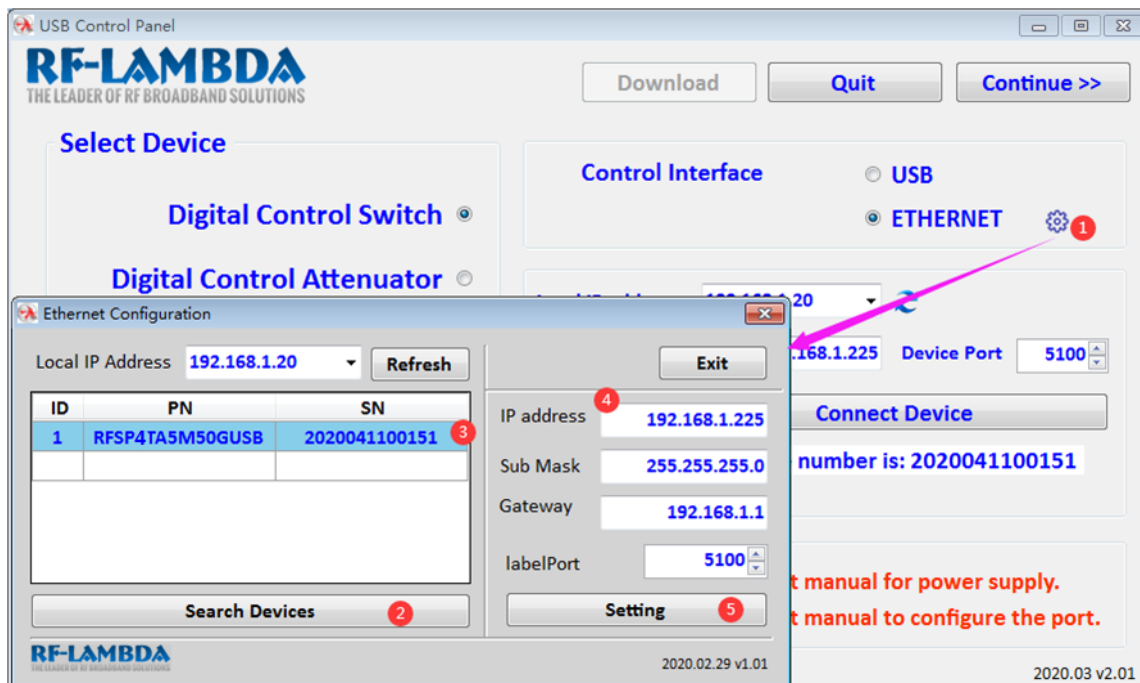

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP2TA0003GUSB	Connectors SMA-Female	0.02GHz-3GHz SP2T USB / Ethernet Controlled Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.