


Hermetically Sealed Reflective Coaxial SP2T Switch 0.01GHz-6GHz



Product Description

RFSP2TR5M06GS-H is a hermetically sealed reflective coaxial single pole double throw switch with a frequency range of 0.01 to 6GHz.

The power input of this switch is 50 dBm Max. The insertion loss is 1.0dB with a typical isolation of 45dB.

The product features fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Features

- TTL compatible driver included
- Fast Switching Speed
- High Power Cold Switching
- Insertion Loss 1.0dB
- Isolation 45dB Typical
- 50 Ohm Matched

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), Vdd = +5V, TTL = 0 / +5V

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		0.01-3			3-6		GHz
Insertion Loss		1.0	1.3		1.3	1.5	dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ °C
Isolation	40	45		35	38		dB
Input VSWR		1.3	1.5		1.3	1.5	: 1
Output VSWR		1.3	1.5		1.3	1.5	: 1
*RF Input Power (CW)(50Ω,T = 25°C)			47			47	dBm
*RF Input Power (Pulsed, 10% Duty Cycle, 20us pulse width)			50			50	dBm
DC Power Dissipation		0.5			0.5		W
0.1dB Compression Point (P0.1dB)		47			47		dBm
IIP3@Two-tone input power = 15 dBm/tone, Δf = 1 MHz		55			55		dBm
Switching Speed			150 Typ.				ns
Bias Current (+5V)			100 Max.				mA
Weight	Switch		0.21 Max.				lbs
	Including Heat sink		0.38 Max.				lbs
Impedance			50				Ω
Input / Output Connectors	SMA-Female(Input) – SMA-Female(Output)						
Package	Epoxy Sealed (Standard)						
	Hermetically Sealed (Optional)						

* When the working frequency is lower than 100MHz, the power needs to be derated linearly to 1W from 100MHz to 10MHz.

Absolute Maximum Ratings

Parameter	Rating
Biasing	+5V±10%

Notes:

1. TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged .
2. If the device operates in high power state, recommend keeping case temperature lower than 60°C.
3. Cold Switching: Before changing any TTL signal(s), the RF input power must be blanked or the switch could be damaged.
4. DC blocks required . Input and output ports must not be connected to DC ground or any DC voltage or the switch will be damaged.


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


** For vibration testing details please see additional information section.

Typical Performance Plots


Insertion Loss @+25°C

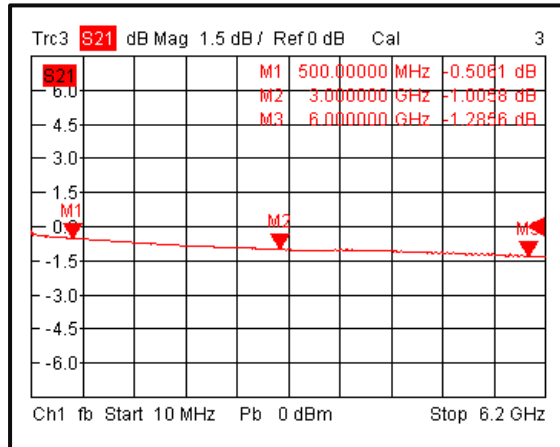


Input VSWR @+25°C

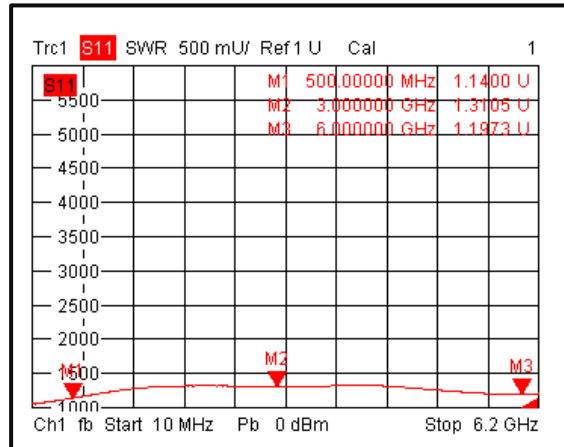


Output VSWR @+25°C

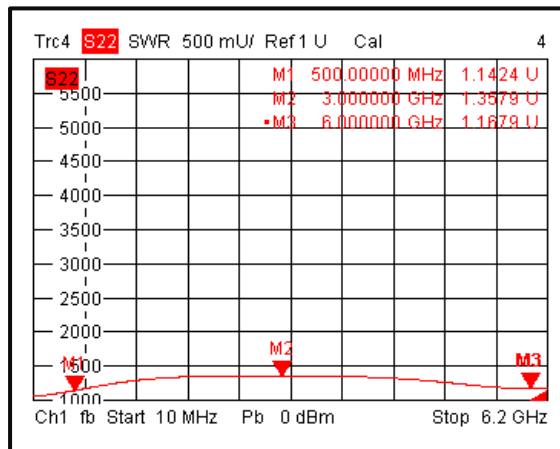


Isolation @+25°C

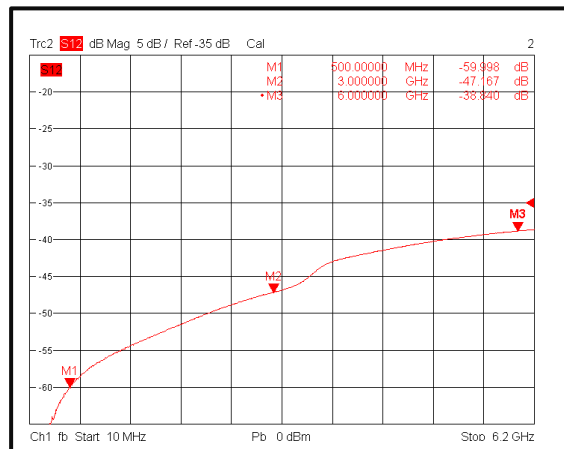

Insertion Loss @-40°C

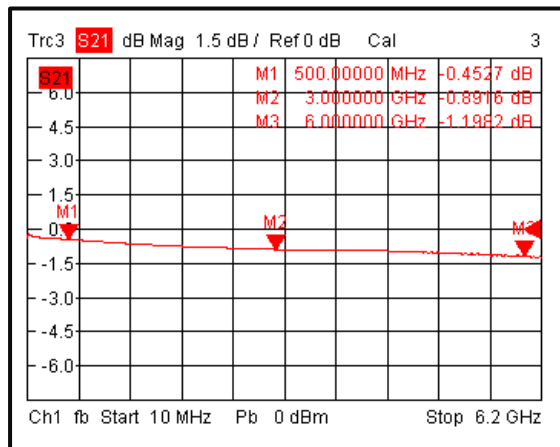


Input VSWR @-40°C

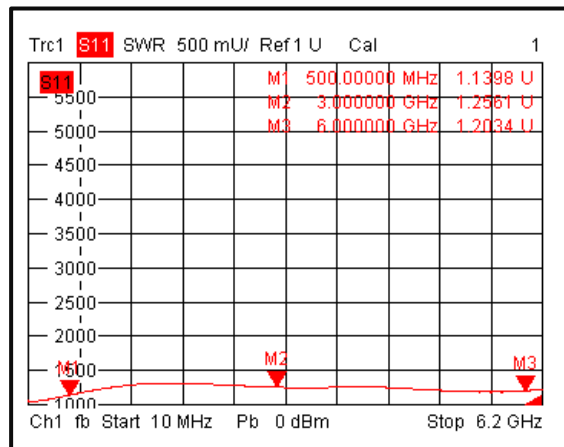


Typical Performance Plots


Output VSWR @-40°C

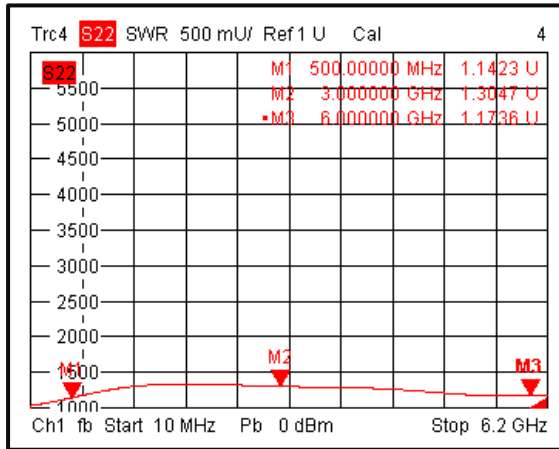


Isolation @-40°C

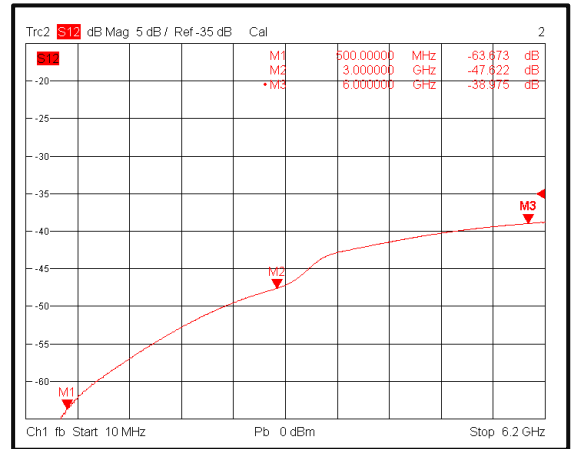


Insertion Loss @+85°C

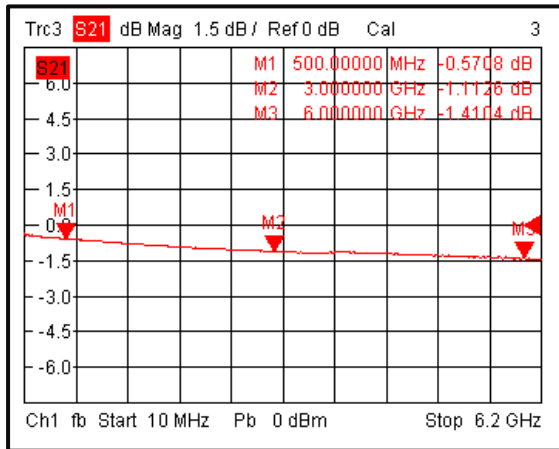


Input VSWR @+85°C

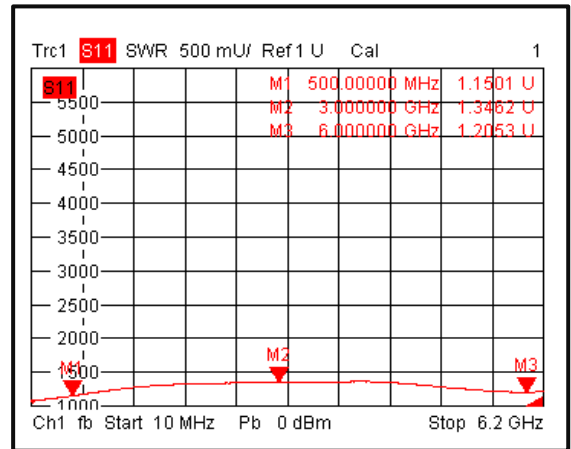

Output VSWR @+85°C

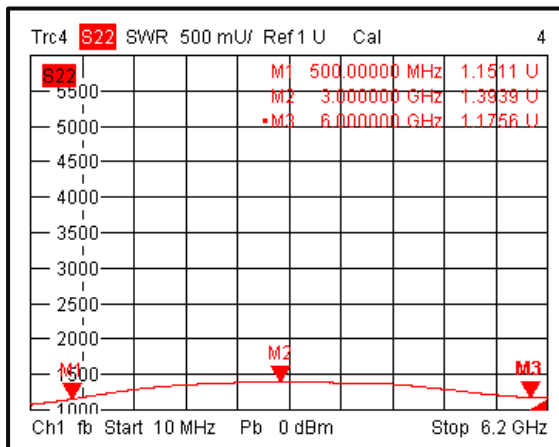


Isolation @+85°C

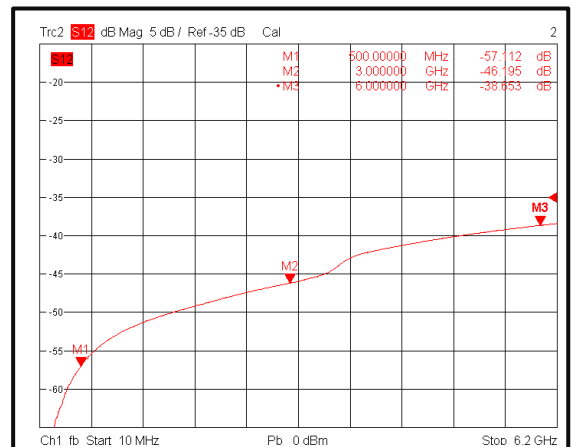


Typical Performance Plots


Insertion Loss Temperature Coefficient

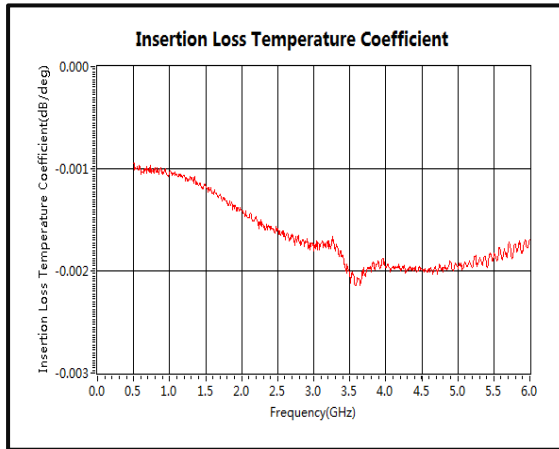


Insertion Loss vs. Temperature

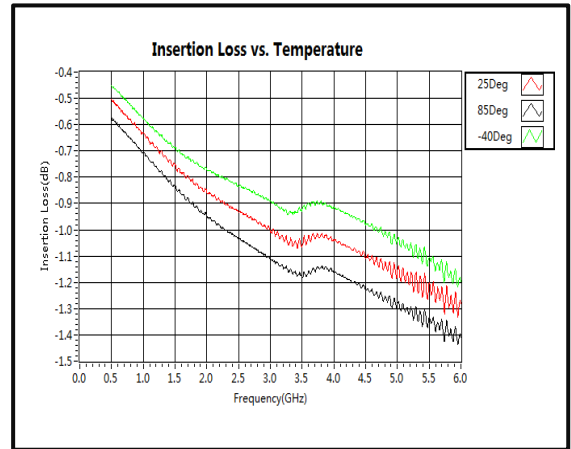


IIP3

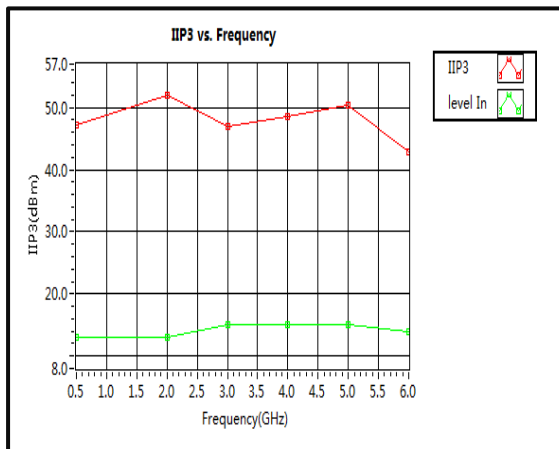


Input Power vs. Frequency

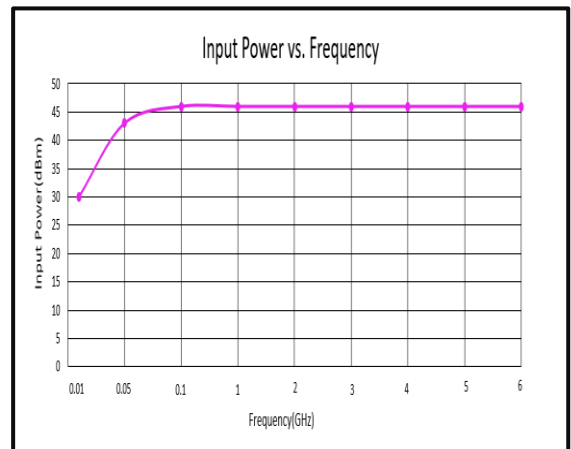


Switching Speed

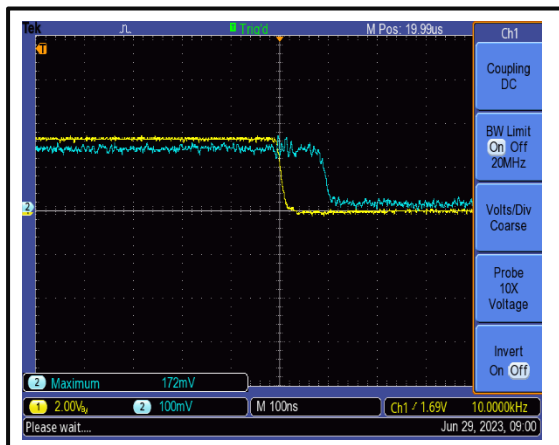

Switching Speed

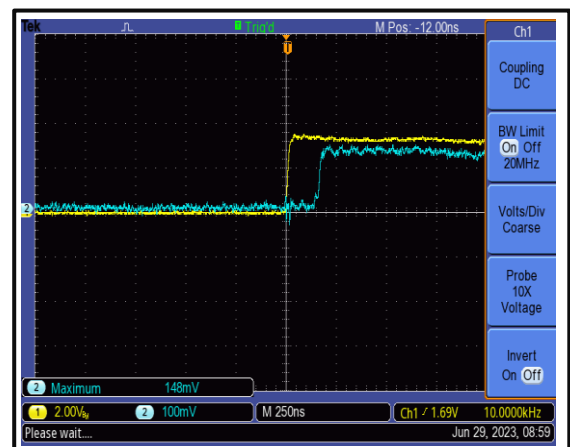

Outline Drawing

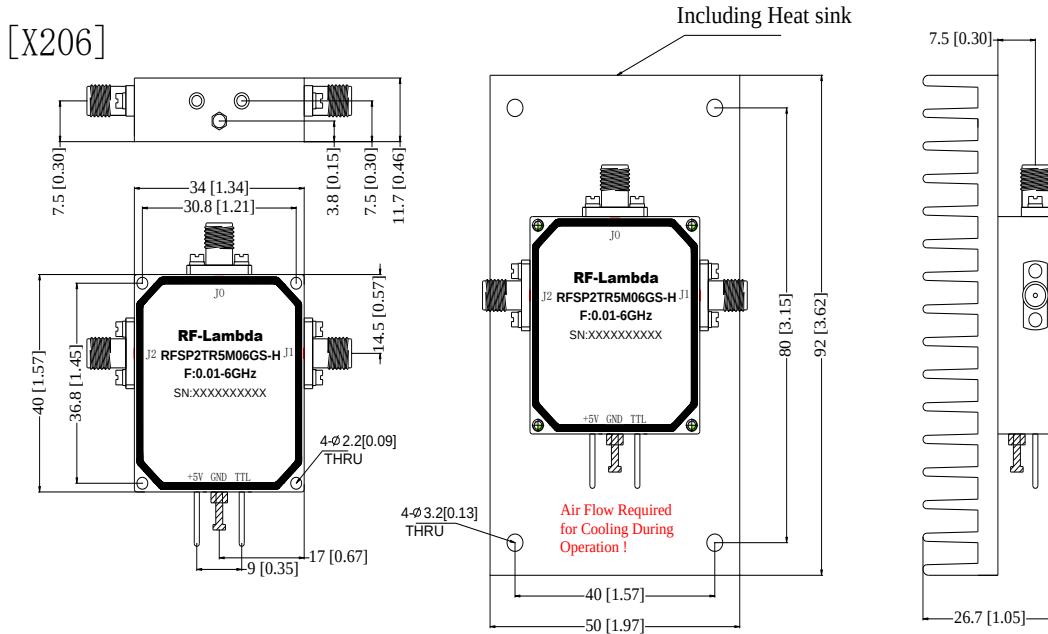


Notes:

1. Package Material: Aluminum
2. Finish: Gold Plated
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.2 [0.008] unless otherwise specified.
5. Heat sink required during operation (sold separately). Matching heatsink is listed on our website. If customer would like to use their own cooling method, please make sure the amplifier will operate under the specs that listed in page 2 of this datasheet.
6. Heatsink Included - Mandatory for Operation.
7. Standard torque wrench must be used to secure RF connectors.

Truth Table

TTL Control Voltage	Low(0)=0~0.8V
THRESHOLD	High(1)=2.8~5V
Control Input TTL	State
1	J0-J1
0	J0-J2
Control Pin	Customization available upon request



Additional Information

Documentation

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Heatsink Lookup Specifications

https://rflambda.com/search_heatsink.jsp

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Webpage

Ordering Information

Part Number	Modification	Description
RFSP2TR5M06GS-H	Standard	0.01GHz-6GHz SP2T Hermetically Sealed GaN Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.