


USB / Ethernet Absorptive Coaxial SP8T Switch 1GHz-18GHz



Product Description

RFSP8TA0118GUSB is an absorptive usb / ethernet controlled coaxial single pole eight throw switch with a frequency range of 1 to 18GHz.

The maximum input power of this switch is 30dBm. The insertion loss is 2.0dB with a typical isolation of 80dB.

This product features fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Features

- USB / Ethernet Control
- Control SW included.
- Low Power Cold Switching
- Insertion Loss 2.0dB
- Isolation 80dB
- 50 Ohm Matched

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), USB Powered

Parameter	Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		1-6			6-12			12-18		GHz
Insertion Loss		1.8	2.4		2.0	3.0		3.2	4.0	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ °C
Isolation	60	78		60	80		60	75		dB
Input VSWR		1.5	1.8		1.4	1.8		1.5	2.0	: 1
Output VSWR		1.5	1.8		1.4	1.8		1.5	2.0	: 1
RF Input Power (CW)			30			30			30	dBm
DC Power Dissipation		2.0			2.0			2.0		W
0.1dB Compression Point (P0.1dB)		30			30			30		dBm
IIP3		40			40			38		dBm
Bias Current					400 Typ.					mA
Power Supply					DC (+5.0V)					
Control Interface					USB2.0 & Ethernet (IPv4) (Control Cable Included)					
Weight					0.33 Max.					lbs
Impedance					50					Ω
Input / Output Connectors					SMA-Female(Input) – SMA-Female(Output)					
Package					Epoxy Sealed (Standard)					
					Hermetically Sealed (Optional)					


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


*For vibration testing details please see additional information section.

Typical Performance Plots


Insertion Loss @+25°C

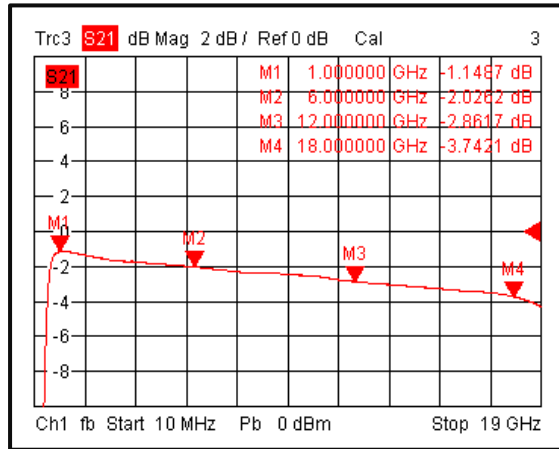


Input VSWR @+25°C

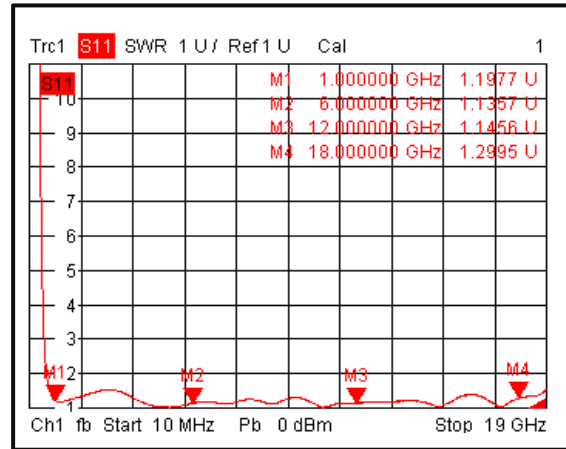


Output VSWR @+25°C

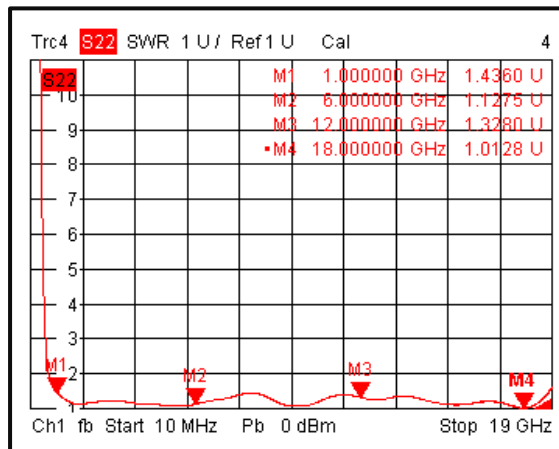


Isolation @+25°C

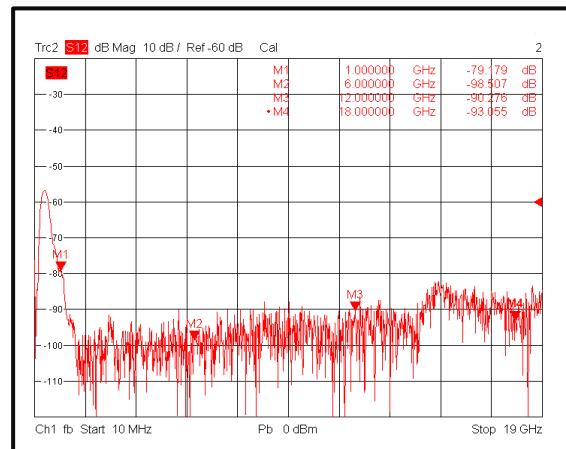

Insertion Loss @-40°C

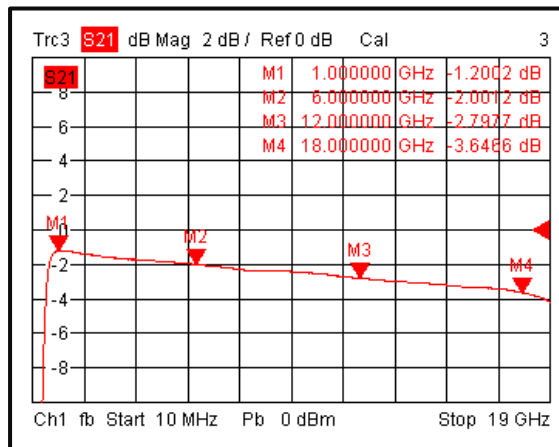


Input VSWR @-40°C

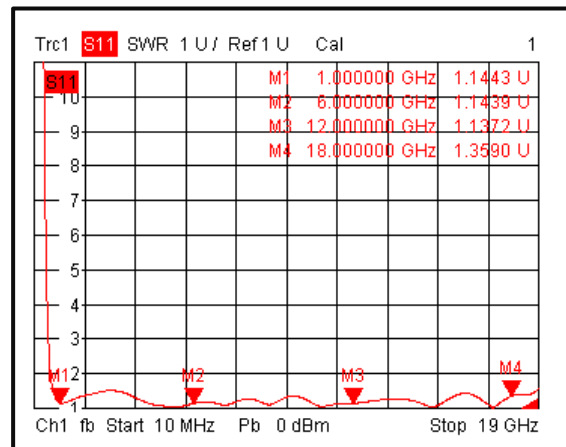


Typical Performance Plots


Output VSWR @-40°C

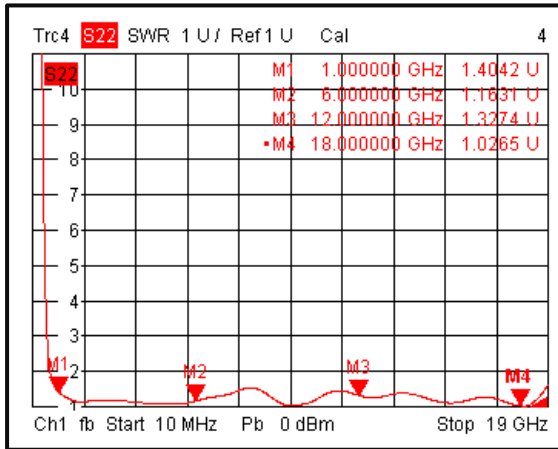


Isolation @-40°C

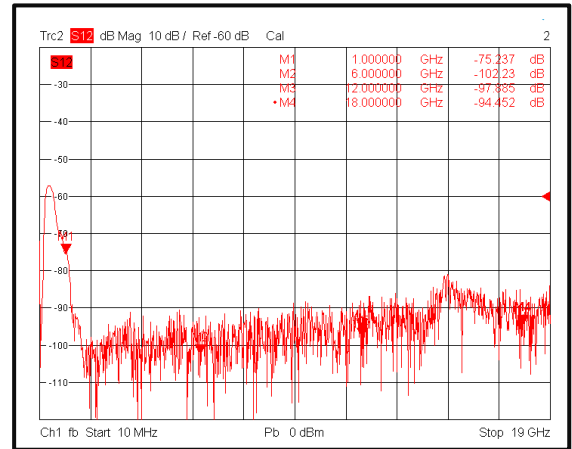


Insertion Loss @+85°C

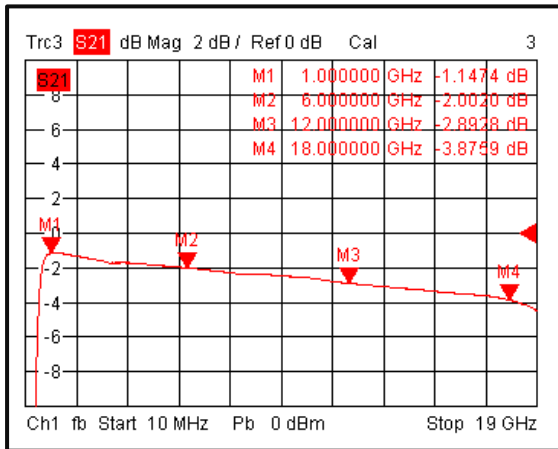


Input VSWR @+85°C

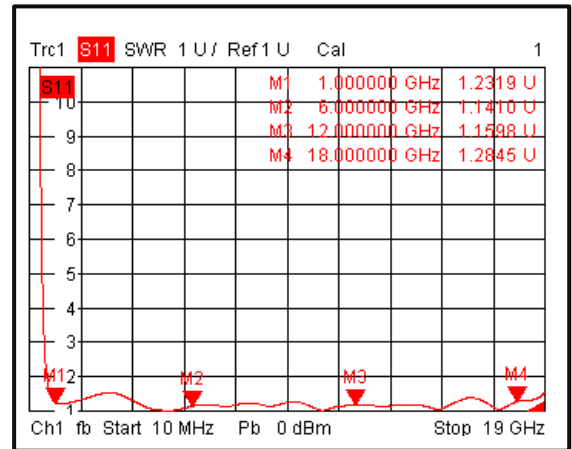

Output VSWR @+85°C

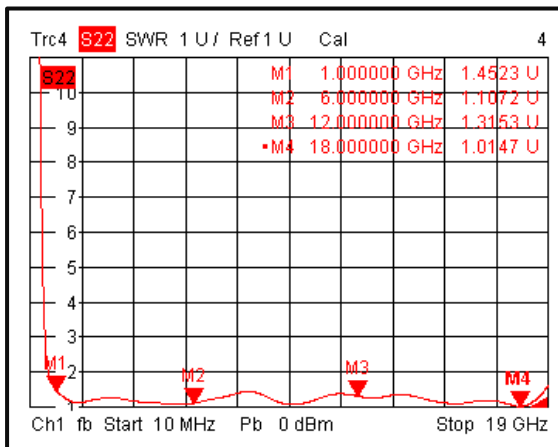


Isolation @+85°C

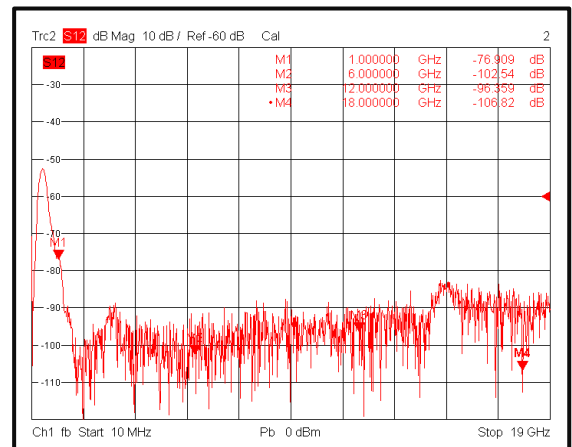


Typical Performance Plots


Insertion Loss Temperature Coefficient

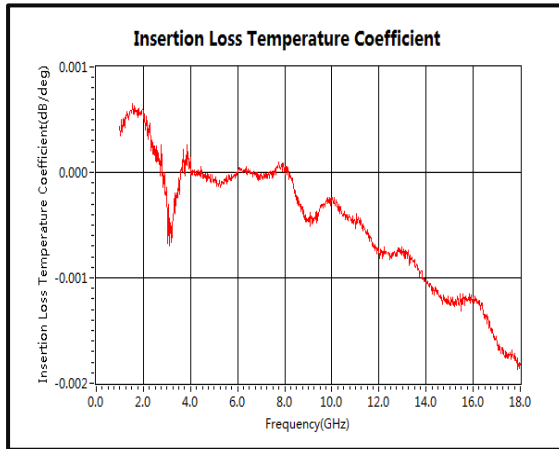


Insertion Loss vs. Temperature

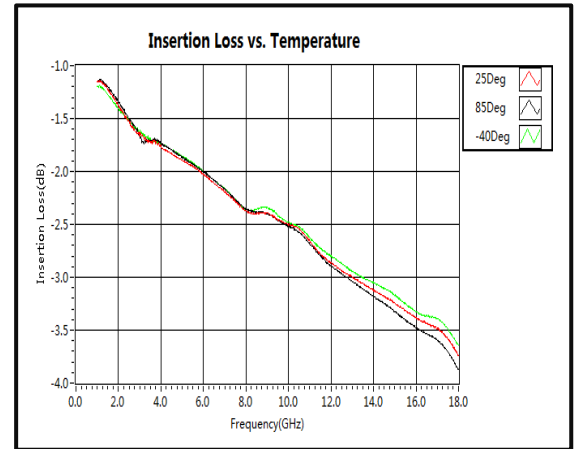

IIP3

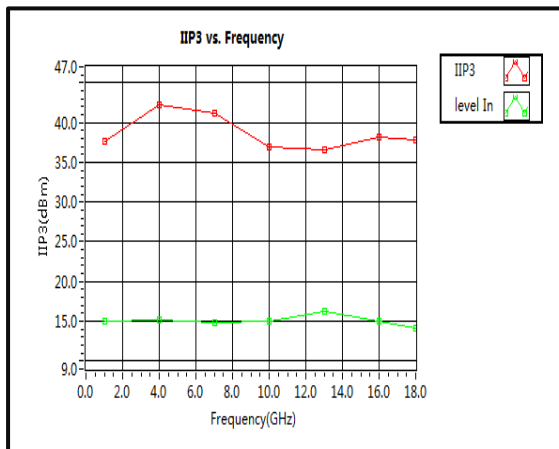


Outline Drawing

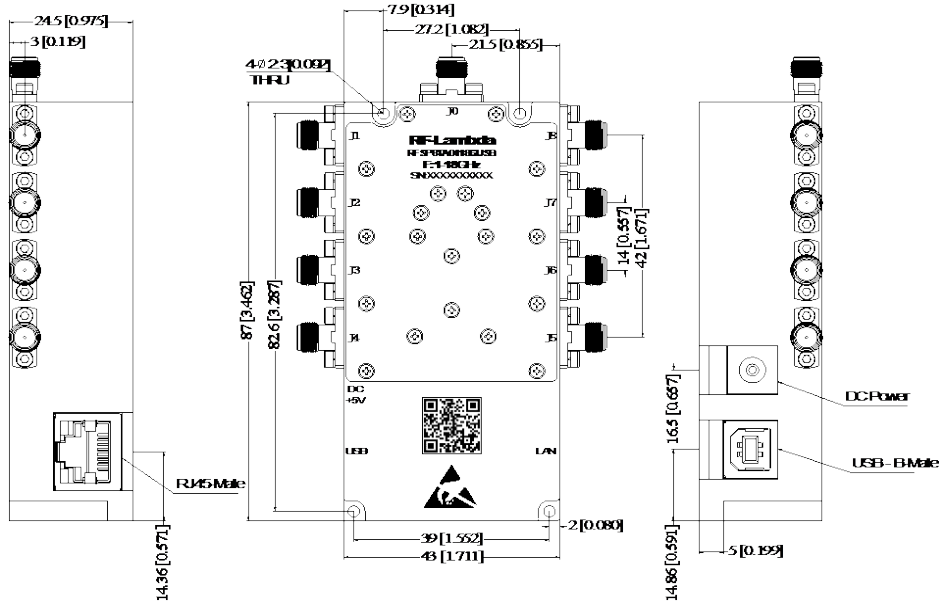

Notes:

1. Package Material: Aluminum
2. Plating: Nickel
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.2 [0.008] unless otherwise specified.



Packing List

ID	Description	QTY
1	Fig a. USB/Ethernet Control RF Switch	1
2	Fig b. USB2.0 Cable (5 feet / 1.5 meter)	1
3	Fig c. Network Cable (6 feet / 2 meter)	1
4	Fig d. International Universal AC Power Adapter (For SP6T or higher)	1



Fig b.



Fig c.



Fig d.

Control Content Description

Format Requirement	USB (virtual serial port) Configuration	LAN Interface	Range of Parameters
a. All commands must end with a semicolon. b. All commands are case - insensitive. c. Comma is used to separate multiple parameters in commands. d. All commands are suitable for USB(virtual serial port) and LAN interface.	Baud Rate :115200 Data bits : 8 Parity : None Stop bits : 1 Flow Type :None	IP address and Port. Default:192.168.1.225:5100 Use 'USB Control Panel.exe' to set.	x(channel):1~n. y(period ,ms): 0.01~2000 z(pulse ,ms): 0.01~2000

Command Specification

ID	Order	Description	Return	Example
1	*IDN?;	Query product information	Product PN ,SN, Manufacturer , version	*IDN?;
2	Reset;	Reset the product	/	Reset;
3	SW:Sopen x;	Open channel x	SOx	SW:Sopen 2; Return : SO2
4	SW:Sloop x,y,z;	Automatic cycle opening channel x with period as y (ms) and pulse width as z(ms)	SLx	SW:Sloop 2,0.1,0.05; Return :SL2
5	SW:Mloop x1,x2,...,z;	Cycle on channels x1, x2,... with pulse width as z(ms)	MLx1	SW:Mloop 1,2,0.1; Return :ML1
6	SW:Close;	Close all channel. Stop loop ,close all channel.	SC0	SW:Close; Return: SC0

Error Code Query

ID	Return	Description
1	E1	Semicolon missing
2	E2	Incorrect commands
3	E3	Missing space
4	E4	Incorrect parameter format
5	E5	Out of range parameters

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Download Quit Continue >>

Select Device

Digital Control Switch

Digital Control Attenuator

Digital Control Phase Shifter

Control Interface

USB

ETHERNET

Please select a COM port COM62

Connect Device

The device number is: 2020041100151
Device IP:192.168.1.225:5100

Note

1. Please refer to the product manual for power supply.
2. Please refer to the product manual to configure the port.

2020.03 v2.01

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

<< Goback

Select Path

J0 J1

Manual Control ☒ **Single Channel Auto Cycle** ☐

OFF

Pulse Period(ms) 10.00
Pulse Width(ms) 5.000

Start

Multi Channel Auto Cycle ☐

J1 J2 J3 J4 Use Input ☐
J5 J6 J7 J8

Input the channel which you want to use,
Separated by commas.For example:3,1,6,7

Pulse Width(ms) 0.100 Start

Device Name: Digital Control Switch
Part Number: RFSP4TA5M50GUSB
Serials Number: 2020041100151
Control Model: USB
Control Port: COM62

Send String SW:Sopen 1;
Recevie String S01

2020.03 v2.01

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Select Device

Digital Control Switch ☒ 1

Digital Control Attenuator ☐

Digital Control Phase Shifter ☐

Control Interface

USB ☐

ETHERNET ☒ 2

Local IP address 192.168.1.20

Device IP address 192.168.1.225 3

Device Port 5100 4

Connect Device 5

The device number is: 2020041100151

Note

1. Please refer to the product manual for power supply.

2. Please refer to the product manual to configure the port.

2020.03 v2.01

USB Control Panel

RF-LAMBDA
THE LEADER OF RF BROADBAND SOLUTIONS

Select Device

Digital Control Switch ☒

Digital Control Attenuator ☐

Digital Control Phase Shifter ☐

Control Interface

USB ☐

ETHERNET ☒ 1

Local IP address 192.168.1.20

Device IP address 192.168.1.225 4

Device Port 5100

Connect Device

The device number is: 2020041100151

Ethernet Configuration

Local IP Address 192.168.1.20 Refresh

ID	PN	SN
1	RFSP4TA5M50GUSB	2020041100151 3

Search Devices 2

IP address 192.168.1.225 4

Sub Mask 255.255.255.0

Gateway 192.168.1.1

labelPort 5100

Exit

Setting 5

2020.02.29 v1.01

2020.03 v2.01

Additional Information

Documentation	Webpage
ESD Policy	https://rflambda.com/pdf/rflambda_esd_control.pdf
Connector Torque Specifications	https://www.rflambda.com/pdf/Torque_Specifications.pdf
Random Vibration Test Standard	https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP8TA0118GUSB	Connectors SMA-Female	1-18GHz SP8T USB / Ethernet Controlled Switch
RFSP8TA0118G	Connectors SMA-Female	1-18GHz SP8T PIN Diode Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.