

WR284 Waveguide to Coaxial Adapter 2.6GHz-3.95GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Features

- Full band operation
- Low VSWR
- Rugged mechanical configuration

Product Description

RFWA284A0CFAL is a waveguide to coaxial adapter with a frequency range of 2.6 to 3.95GHz.

The operating temperature of this product is from -40 to +85°C

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations


Electrical Specifications($T_A=25^{\circ}\text{C}$)

Parameter	Min	Typ	Max	Units
Frequency Range	2.6		3.95	GHz
Insertion Loss			0.2	dB
VSWR			1.25	:1
Connector Type		SMA-Female		
Waveguide Type		WR284		
Flange Type		UG1725/U		

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-55°C to +125°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Outline Drawing

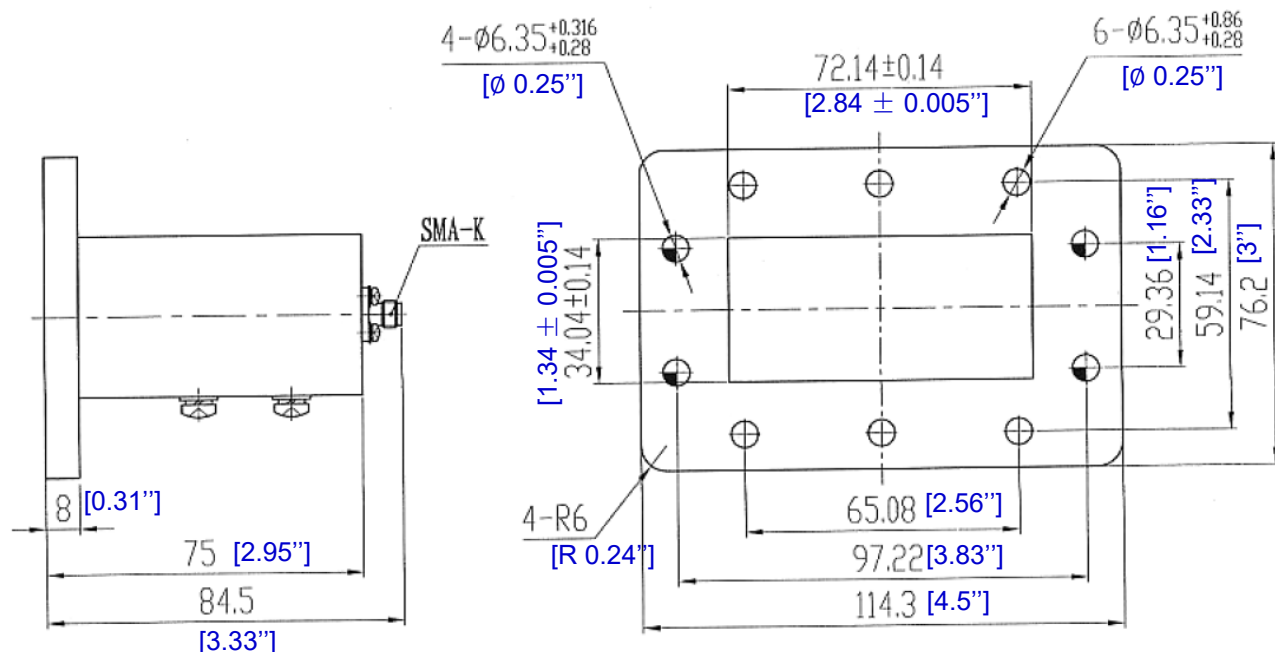

Notes:

1. Package Material: Aluminum
2. Internal Finish: Chromate conversion; Outside finish: Anticorrosion grey paint
3. All dimensions are in millimeters [inches].
4. The tolerance noted is just for reference.

Additional Information

Documentation

ESD Policy

Webpage

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFWA284A0CFAL	WR284	2.6GHz-3.95GHz Waveguide to Coaxial Adapter

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.