

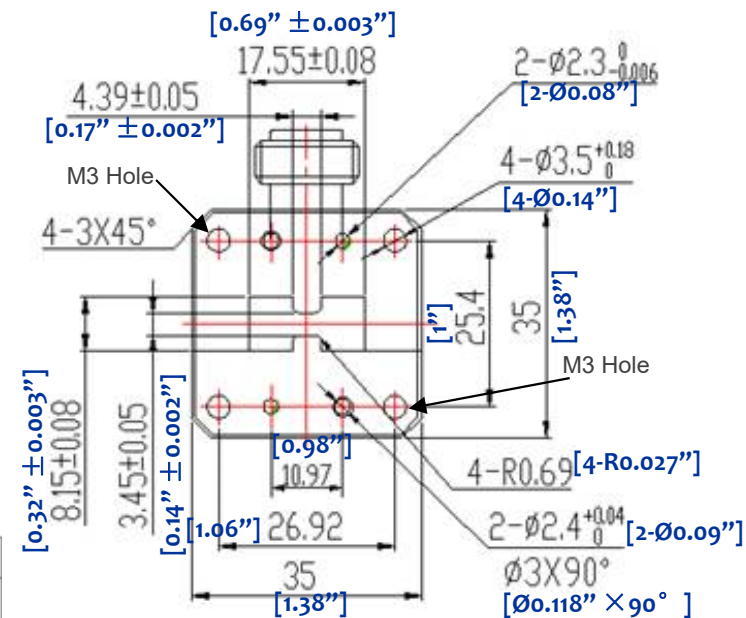
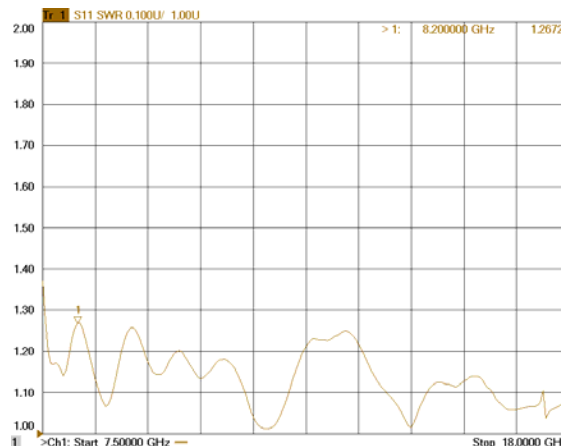


WAVEGUIDE TO COAXIAL ADAPTER --- RFWAD750

3.0	Electrical Specifications	
3.1	Frequency	7.5 ~ 18GHz
3.2	Max. VSWR	1.70:1
3.3	Insertion Loss	0.5dB (max.)
3.4	CW Power	500W (max.)

1.0	Mechanical Specifications	
1.1	Waveguide	Rectangular Waveguide WRD750
1.2	Flange	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Aluminum, Brass, Alloyed Cuprum, Stainless
1.5	Coaxial	SMA (F-male)
1.6	Internal Finish	Silver Plated chromate or conversion
1.7	External Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-50°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

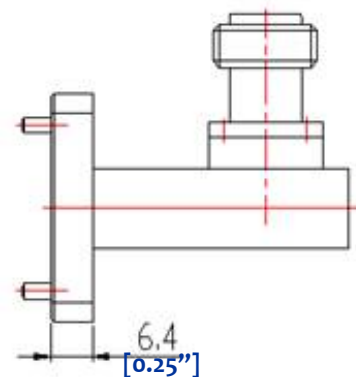

Part Number: RF W AD 750 A 0 CF AL

RF-Lambda _____

Waveguide _____

Adapter _____

Waveguide Type Number _____

Connector Type: A=SMA, B=N, C=TNC, D=7/16 _____

Degree: 9=90° or 0=0° _____

Flange Type: CG=CPRG; CF=CPRF; CO=COVER; CK=CHOKE _____

Material: AL=Aluminum; BS=Brass; AC=Alloyed Cuprum; SS=Stainless _____

PAGE 1 OF 1	DATE Aug 12 th 2005
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY	DESIGN RFPC
RF-LAMBDA	RFPC
CAD MODEL REVISION 09	1
ASSEMBLY REVISION VS52	
ASSEMBLY NAME RFLVR16	
DRAWING NUMBER D051	0
www.rflambda.com	
RF-LAMBDA	
SIZE LT	SHEETS 1 OF 1