

Double Ridge Waveguide to Double Ridge Waveguide 6GHz-18GHz



Product Description

RFWTRWRD500WRD650 is a double ridge waveguide to double ridge waveguide with a frequency range of 6 to 18GHz.

The max power handling of the adapter is 1000W. The max VSWR of 1.6:1.

The working temperature of this product is between - 40°C and + 85°C.

Features

- WRD500D36-WRD650D28
- Full band operation
- Low VSWR
- Rugged mechanical configuration

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Units
Frequency Range	6		18	GHz
Insertion loss		0.3	0.5	dB
VSWR		1.4	1.6	: 1
Power Handling(CW)		1000		W
Weight		/ Typ		lbs.
Waveguide		WRD500D36-WRD650D28		
Package		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


**For vibration testing details please see additional information section.

Typical Performance Plots

Insertion loss

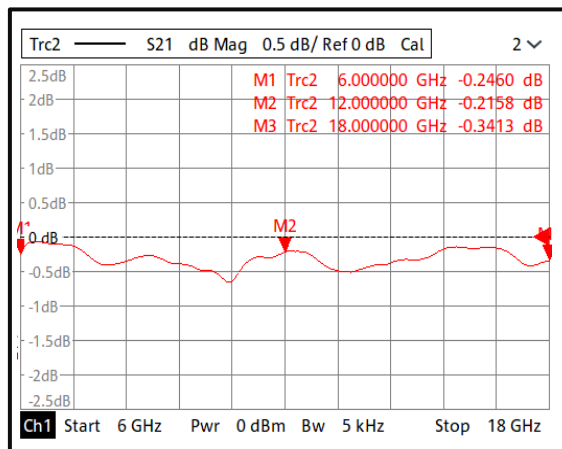





VSWR

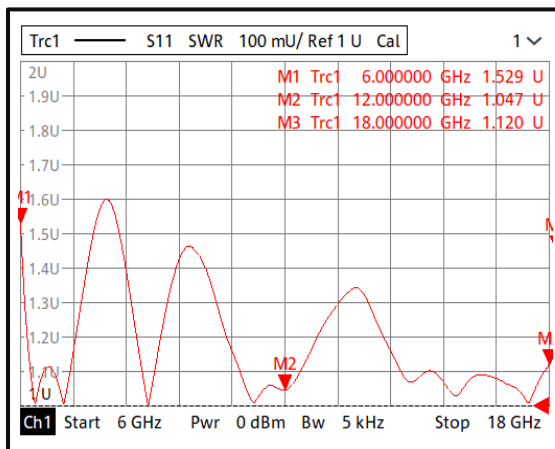

Note:


The data in the above figure is the result of the docking test between two adapters.

Outline Drawing

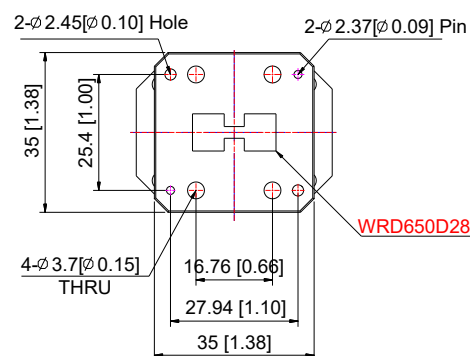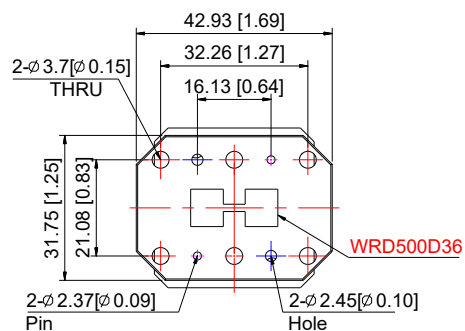

Notes:

1. Package Material: Copper/Brass
2. Finish: Gold Plated
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.2 [0.008] unless otherwise specified.



Additional Information

Documentation

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Webpage

Ordering Information

Part Number	Modification	Description
RFWTRWRD500WRD650	WRD500D36-WRD650D28	6GHz-18GHz Double Ridge Waveguide to Double Ridge Waveguide

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.