

W-Band Mechanically Tuned Gunn Oscillator, 85.0 GHz, ± 0.5 GHz, +17 dBm

Description:

Model SOM-85301317-10-S1 is a W-band, mechanically tuned Gunn oscillator that utilizes a high-performance GaAs Gunn diode and proprietary cavity design to deliver +17 dBm typical power. The oscillator features a frequency tuning range of 84.5 to 85.5 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a self-locking set screw for frequency trimming. Models with a micrometer for lab and test bench applications are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency	84.5 GHz	85.0 GHz	85.5 GHz
Power Output		+17 dBm	
Mechanical Tuning Range		± 0.5 GHz*	
Bias Tuning Range (+3.5 to +4.5 V _{DC})		± 50 MHz	
Bias Voltage		+4.0 V _{DC}	+4.5 V _{DC}
Bias Current		750 mA	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C


Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Anti-Cocking Flange
External Bias	SMA (F)
Mechanical Tuning	Self-Locking Set Screw
Body Material	Aluminum
Finish	Gold Plated
Weight	3.0 Oz
Outline	OM-SW-A-C



W-Band Mechanically Tuned Gunn Oscillator, 85.0 GHz, ± 0.5 GHz, +17 dBm**Typical Measured Data:** (Bias: +4.0 Vdc/750mA)

Tuner Position	Frequency (GHz)	Power (dBm)
0.5 Clockwise Turns	84.500	17.3
Factory Set	85.000	17.4
0.75 Counter Clockwise Turns	85.500	17.3

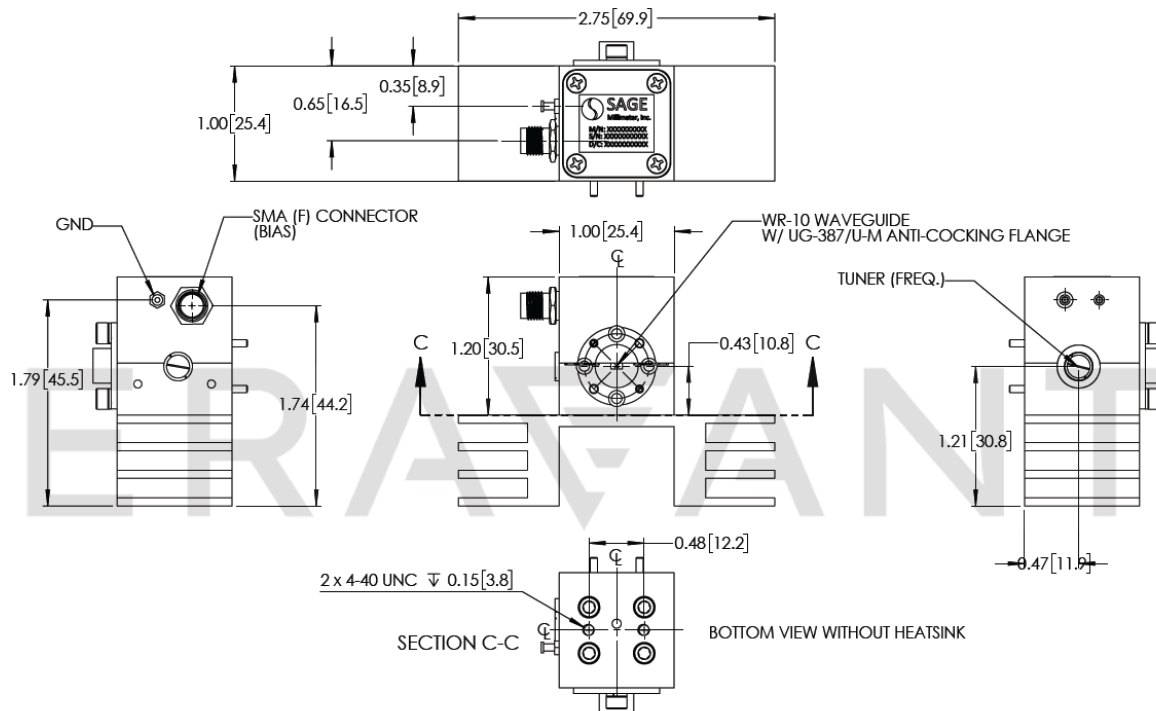Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

W-Band Mechanically Tuned Gunn Oscillator, 85.0 GHz, ± 0.5 GHz, +17 dBm


Note:

- The data given above was tested under case temperature **+25 °C**.
- The Eravant Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in the appendix
- The optional AM/FM Modulator **SOR-M3** can be ordered separately to further enhance the functionality of the Gunn oscillator. The outline of the modulator is also shown in the appendix.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+5.0 Volts**.
- The oscillator is factory set to operate around **85.0 GHz**. The self-locking set screw is for frequency trimming only. It is not designed for frequent frequency tuning.
- The case temperature of the device should never exceed **+50 °C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

The Outline of the Gunn Oscillator Regulator Model SOR-R3.

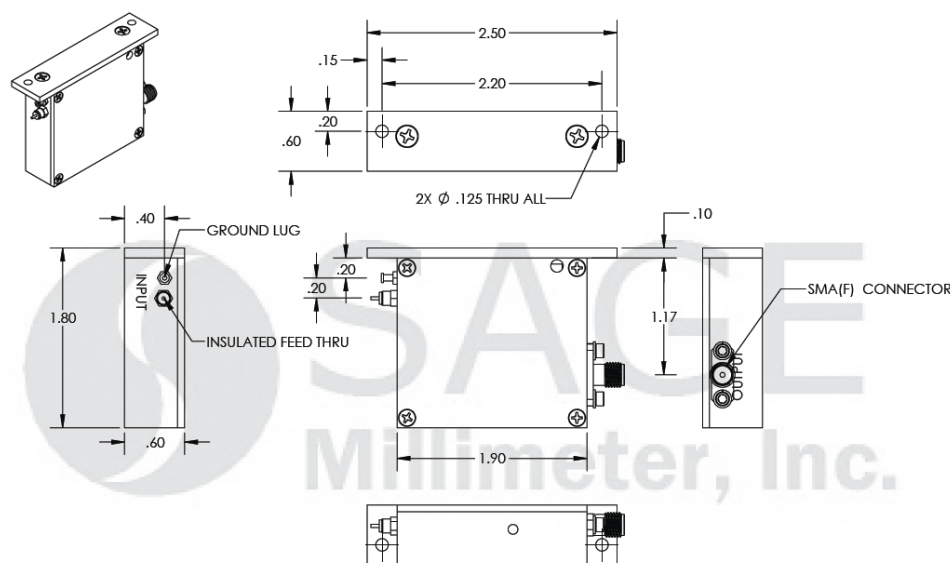

W-Band Mechanically Tuned Gunn Oscillator, 85.0 GHz, ± 0.5 GHz, +17 dBm

The Outline of the Gunn Oscillator Regulator Model SOR-M3.

