



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFCBLAEMSW-SP2TB

Electromechanical Switch Cable Assembly SP2T – Type B



Features


- Matching pin section 0.64 x 0.64mm
- Used for RF Lambda SP2T Electromechanical Switches
- Contacts: 10
- Conforms to DIN EN60 603-13 (DIN41 651) Standards

Electrical Specifications

Parameter	Min.	Typ.	Max.	Units
Cable Length	300	350		mm
Voltage Rating			200	V
Current Rating			0.5	A
Working Temperature	-55		+125	°C
Humidity (DIN 40 040 MIL-C-21 097B Standard)			75	%
Connectors	ODU - 517.076.003.010-Female			

Outline Drawing

All Dimensions in mm [inches]

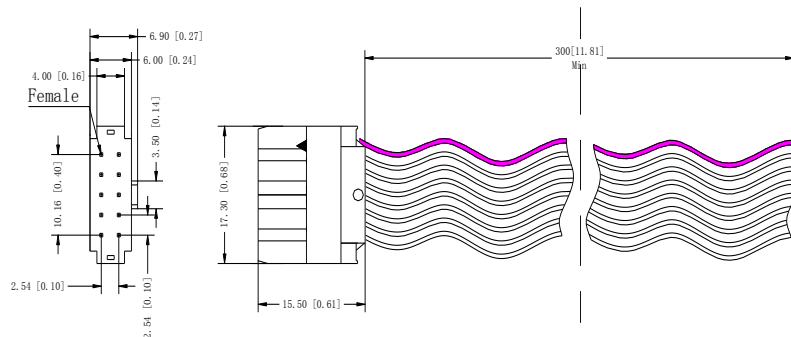

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.