



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP2TA0020GUSB2

USB Absorptive Coaxial SP2T Switch 0.8 - 20GHz



Features

- Wide Band Operation 0.8-20GHz
- USB Controlled and Powered.
- Low Insertion Loss and High Isolation
- Customization available upon request
- Control SW included.

Typical Applications

- Test and Measurement
- Aerospace and military applications
- Wireless Infrastructure

Electrical Specifications, TA = +25 °C, USB Powered

Description	PN: RFSP2TA0020GUSB2									
	SP2T Absorptive Switch									
	Low Power Cold Switching									
Parameters	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.8-8			8-12			12-20			GHz
Insertion Loss		1.6	1.8		2.2	2.4		2.7	3.2	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/°C
Isolation	65	70		60	65		60	65		dB
Input VSWR		1.6	2		1.6	2		1.6	2	:1
Output VSWR		1.6	2		1.6	2		1.6	2	:1
RF Input power (CW)			30			30			30	dBm
DC Power Dissipation		0.6			0.6			0.6		W
0.1dB Compression Point (P 0.1dB)		30			30			30		dBm
IIP3		55			55			55		dBm
Switching Speed	500 Typ.									ns
Weight	1.5 Max.									ounces
Impedance	50									Ω
Bias Current	110 Max.									mA
Control Interface	USB 2.0 (Control Cable Included)									
Input / Output Connectors	SMA-Female									
Finish	Nickel Plated									
Material	Aluminum									

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP2TA0020GUSB2

Ordering Information


Part No.	ECCN	Description
RFSP2TA0020GUSB2	EAR99	SP2T 0.8-20GHz PIN Diode Switch

Environmental Specifications


Operational Temperature (°C)	-45°C~+85°C
Storage Temperature (°C)	-50°C~+125°C
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Shock	20G for 11msec half sine wave, 3 axis both directions

Typical Performance Plots


Insertion Loss @+25°C

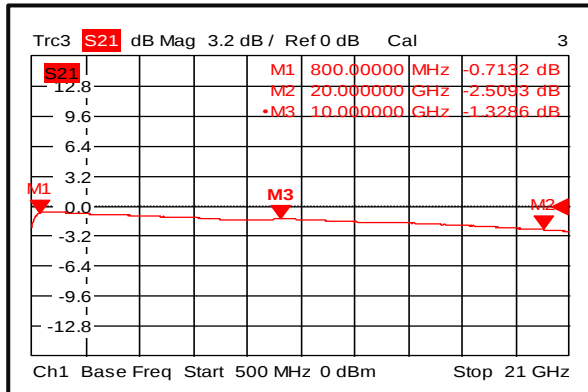


Input VSWR @+25°C

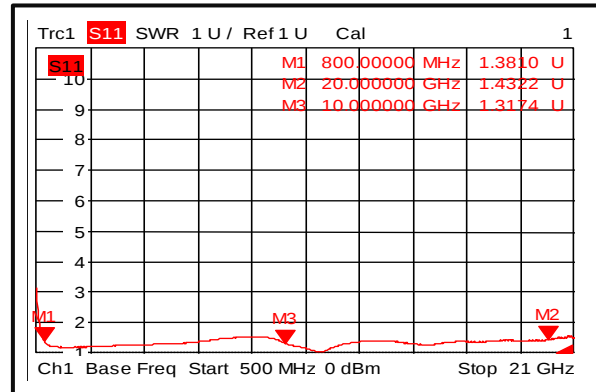

Output VSWR @+25°C

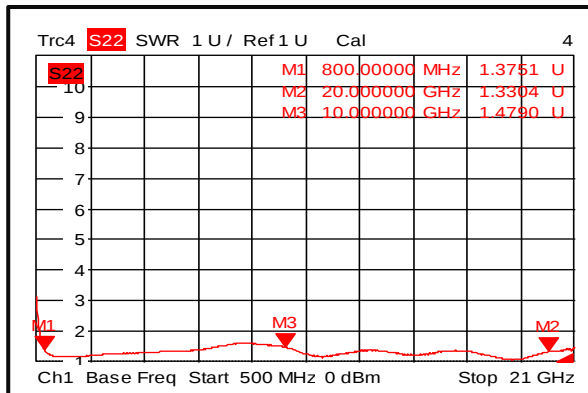

Isolation @+25°C

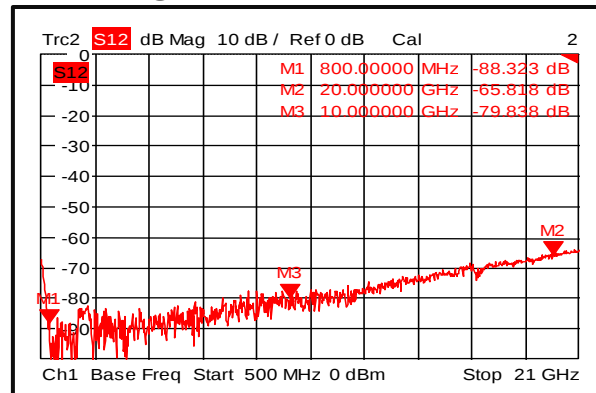

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFSP2TA0020GUSB2

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz


Insertion Loss @-45°C

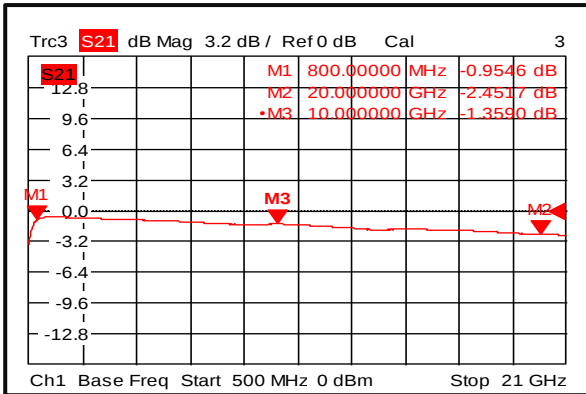


Input VSWR @-45°C

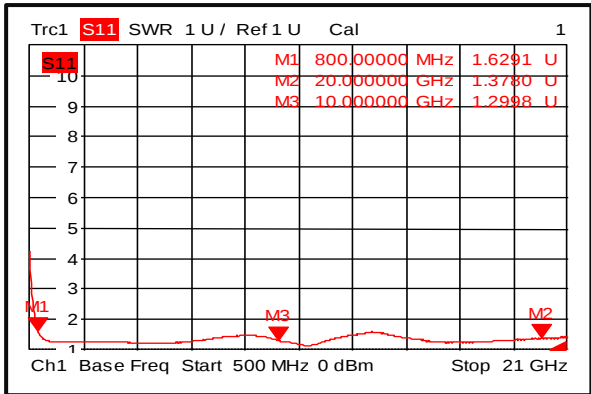


Output VSWR @-45°C

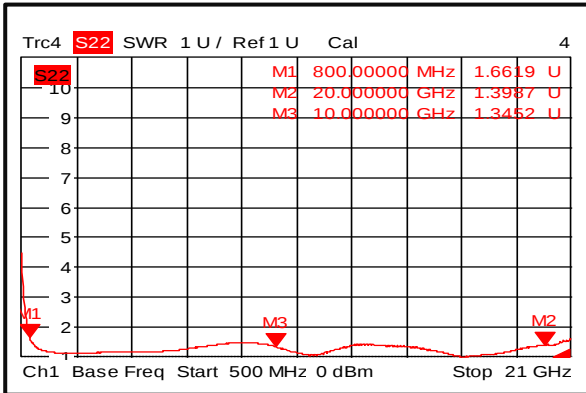


Isolation @-45°C

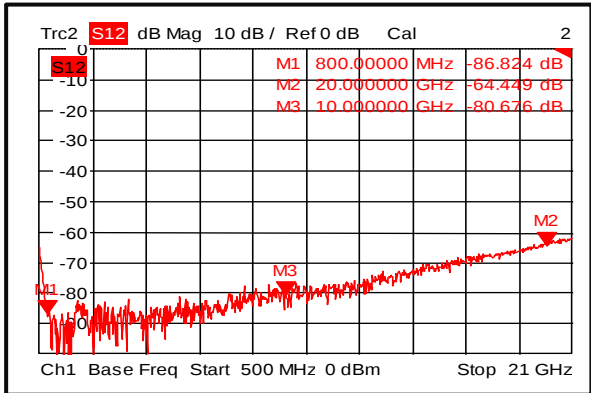


Insertion Loss @+85°C

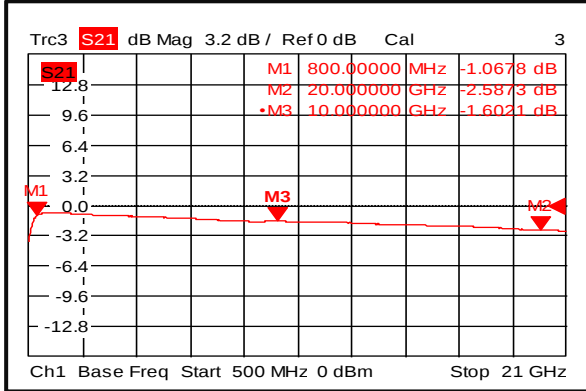


Input VSWR @+85°C

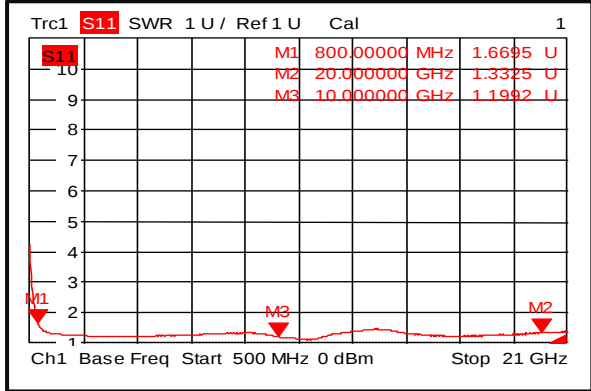

Output VSWR @+85°C

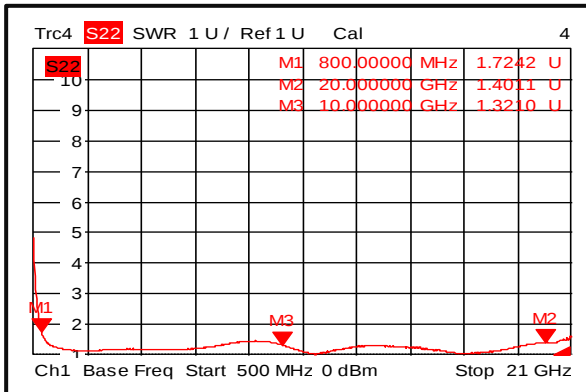

Isolation @+85°C

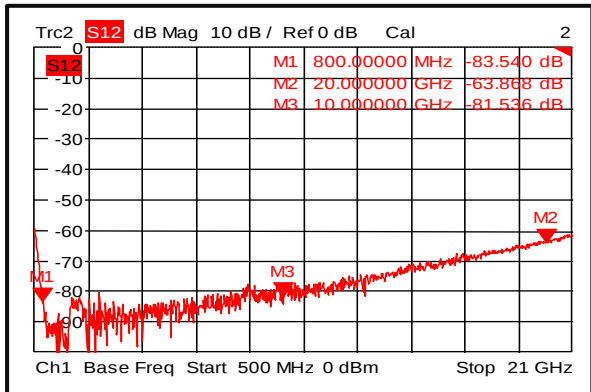




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP2TA0020GUSB2

Outline Drawing:

All Dimensions in mm [inches]

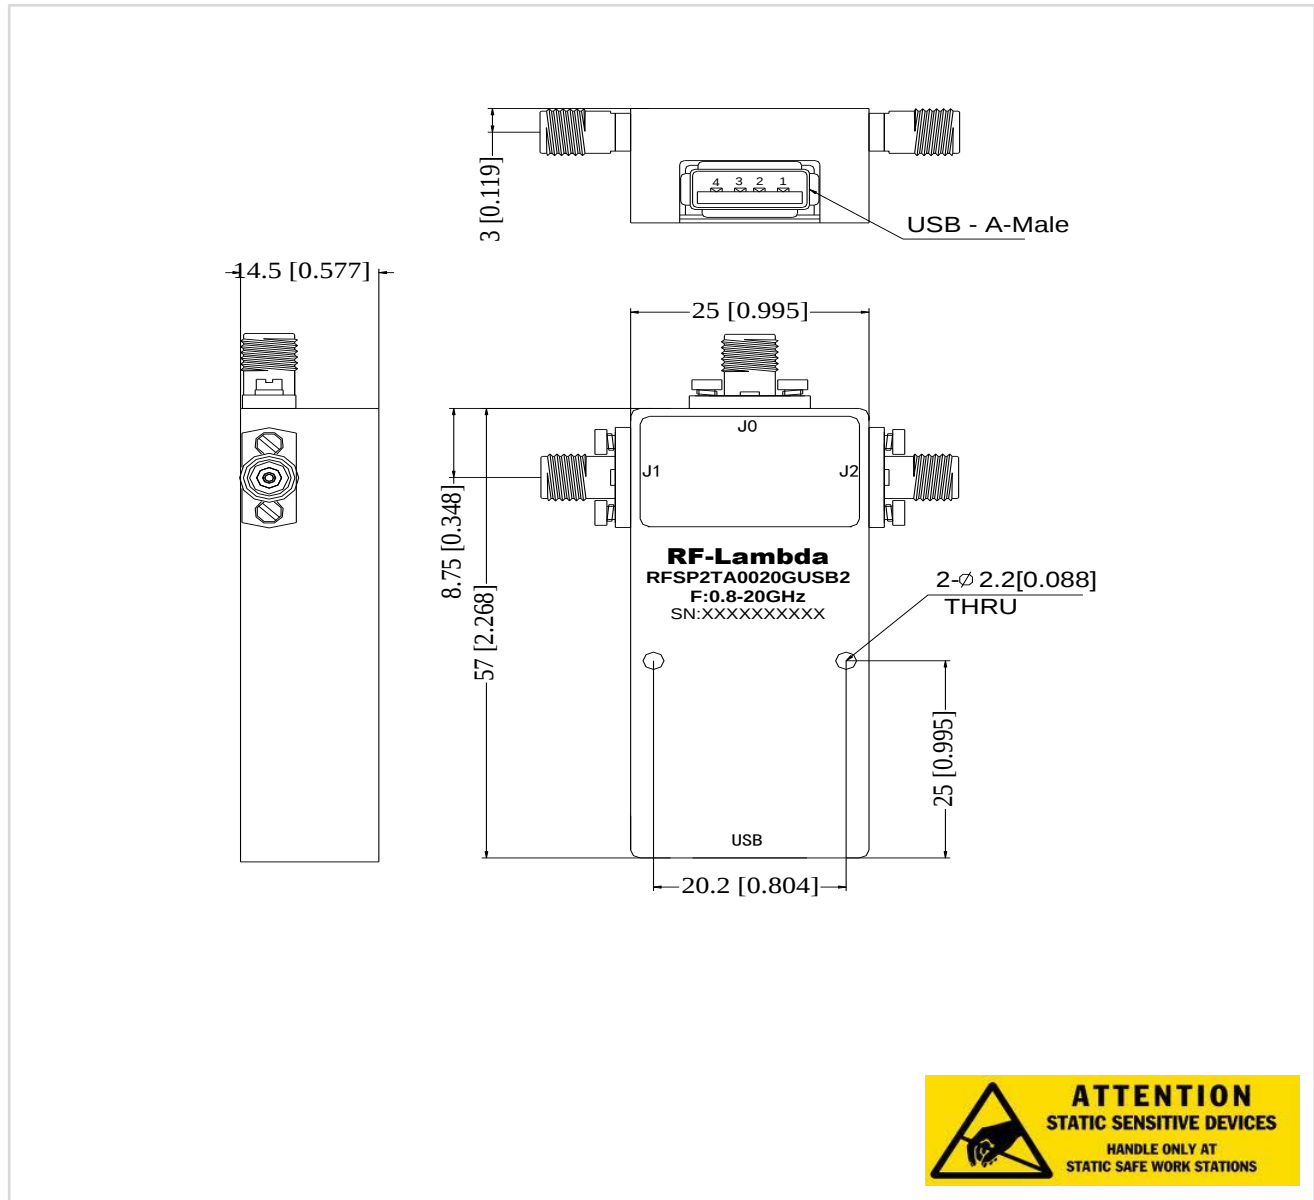

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP2TA0020GUSB2

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz



Figure 1 (USB Control Panel)







RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP2TA0020GUSB2

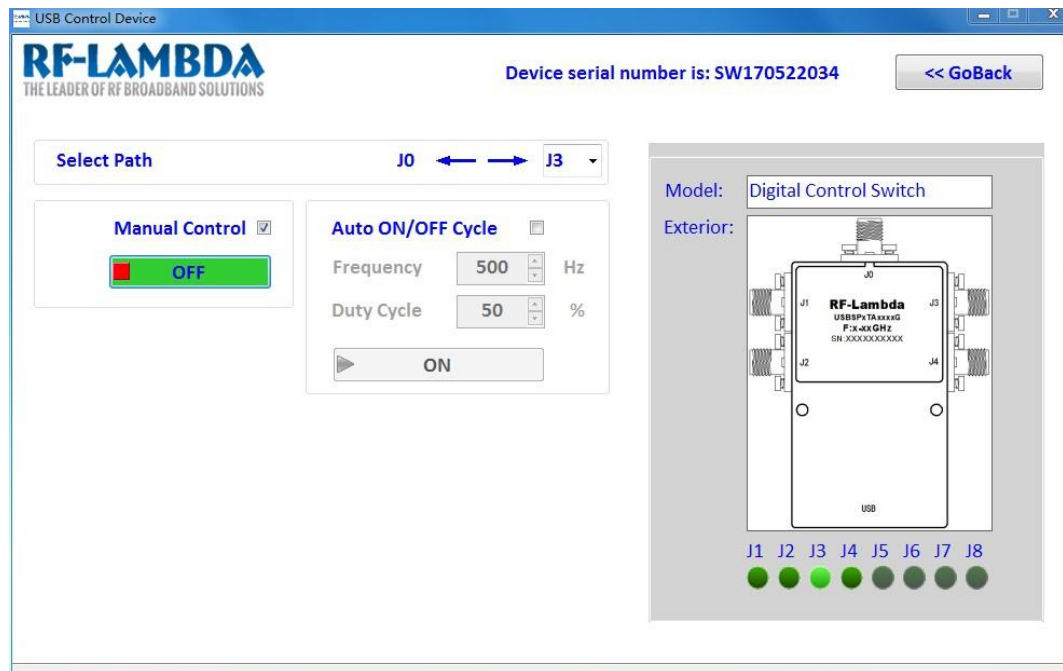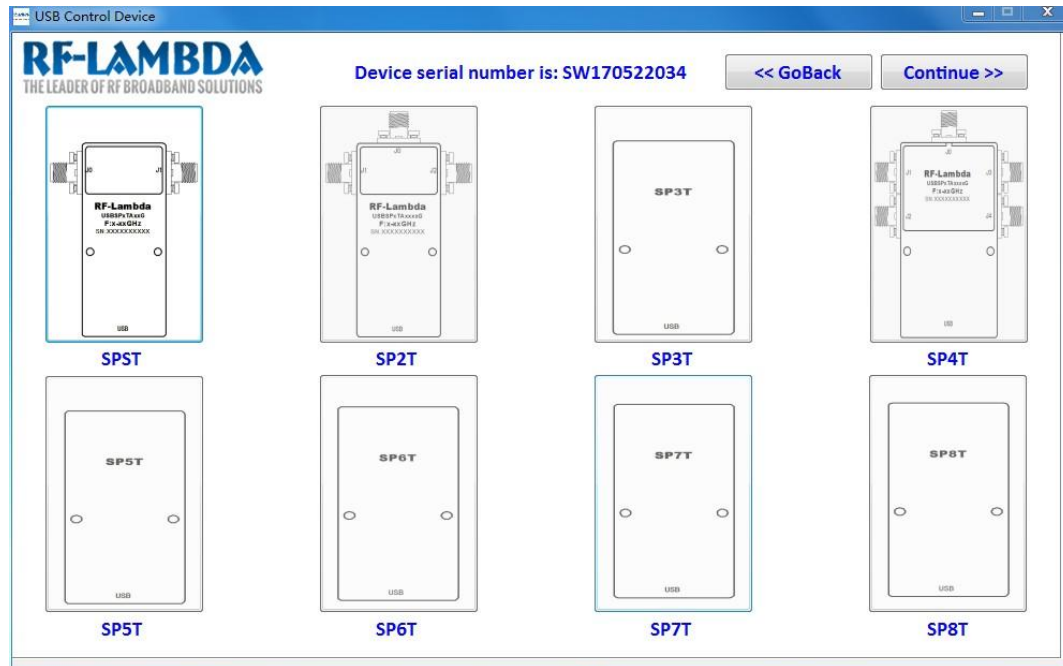

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

USB Absorptive Coaxial Single Pole Double Throw Switch 0.8 - 20GHz