



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSP4T18EMB-S

Absorptive SP4T Electro-Mechanical Switch DC - 18GHz



Features

- SP4T configuration
- Magnetic latching
- Operating life of 1 million cycles
- Guaranteed repeatability of 0.05dB up to 1 million cycles
- Excellent isolation, typically >80 dB to 18GHz
- Terminated ports
- TTL/5V CMOS compatible (optional)

Description

RF-Lambda's multiport switch offers low insertion loss and high isolation, which is necessary for high performance test systems. The repeatability and reliability of this switch is vital to ATS measurement accuracy and can cut the cost of ownership by reducing calibration cycles.

Our electro-mechanical switches are made through RF-Lambda's rigorous design and tight manufacturing specifications.

Part Number	description	Type	Low Freq (GHz)	High Freq (GHz)	Input Power (Watts)
RFSP4T18EMB-S	Absorptive Electromechanical Switches	SP4T	DC	18	1(Max)
Insert. Loss (dB)	VSWR (Max:1) ON Status	Isolation (dB)	Actuator Type	Switching Speed (ms)	Contact
0.2(DC~4GHz) 0.4(4~12.4GHz) 0.5(12.4~18GHz)	1.1(DC~4GHz) 1.2(4~12.4GHz) 1.5(12.4~18GHz)	75(DC~18GHz)	Latching	20	Break Before Make
Repeatability (dB) max.	Life Cycle	Connectors	Bias (VDC)	Current (A)	Control
0.05	1,000,000	SMA-Female	22-28V	0.2	Ground type

* Result taken at 25°C +15VDC

Absorptive SP4T Electro-Mechanical Switch DC - 18GHz



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFSP4T18EMB-S

Environmental Specifications and Test Standards


Parameter	Standard	Description
Operational Temperature	MIL-STD-39016	-25°C~+75°C
Storage Temperature		-55°C~+85°C
Thermal Shock		1 Hour@ -45°C → 1 Hour @ +85°C (5 Cycles)
Random Vibration		Acceleration Spectral Density 6 (m/s) Total 92.6 RMS
Electrical & Temperature Burn In		Temperature +85°C for 72 Hours
Shock		1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	MIL-STD-883	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)		MIL-STD-883 (For Hermetically Sealed Units)

Typical Performance Plots


Insertion Loss

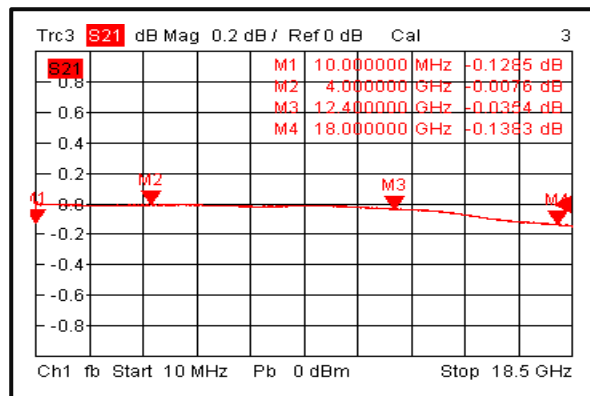


Input VSWR

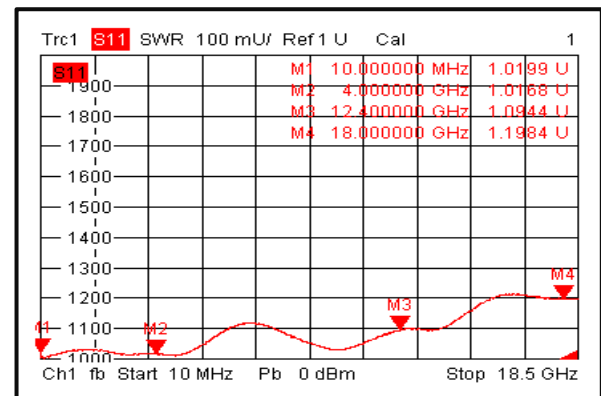

Output VSWR

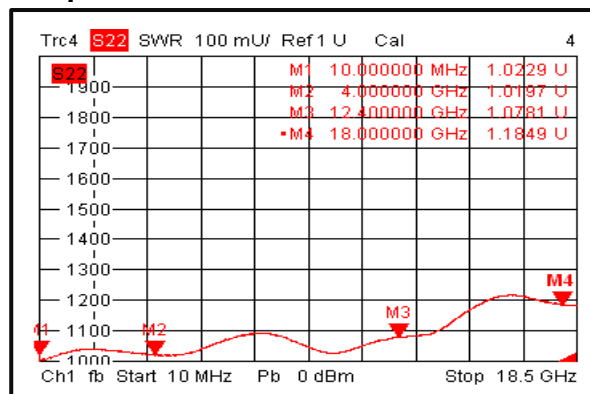

Isolation

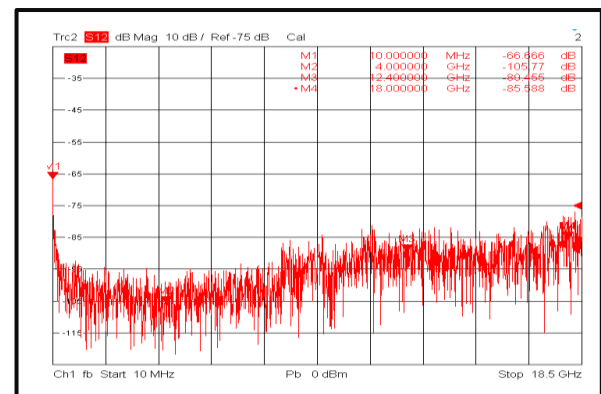

Absorptive SP4T Electro-Mechanical Switch DC - 18GHz



RF-LAMBDA


LEADER OF RF BROADBAND SOLUTIONS

RFSP4T18EMB-S

STATUS \ PIN	1	15	Standard Drive Voltage				
			5	7	11	13	16
RF to 1	22-28V	GND	GND	OPEN	OPEN	OPEN	OPEN
RF to 2			OPEN	GND	OPEN	OPEN	OPEN
RF to 3			OPEN	OPEN	GND	OPEN	OPEN
RF to 4			OPEN	OPEN	OPEN	GND	OPEN
Reset			OPEN	OPEN	OPEN	OPEN	GND

Outline Drawing:

All Dimensions in mm [inches]

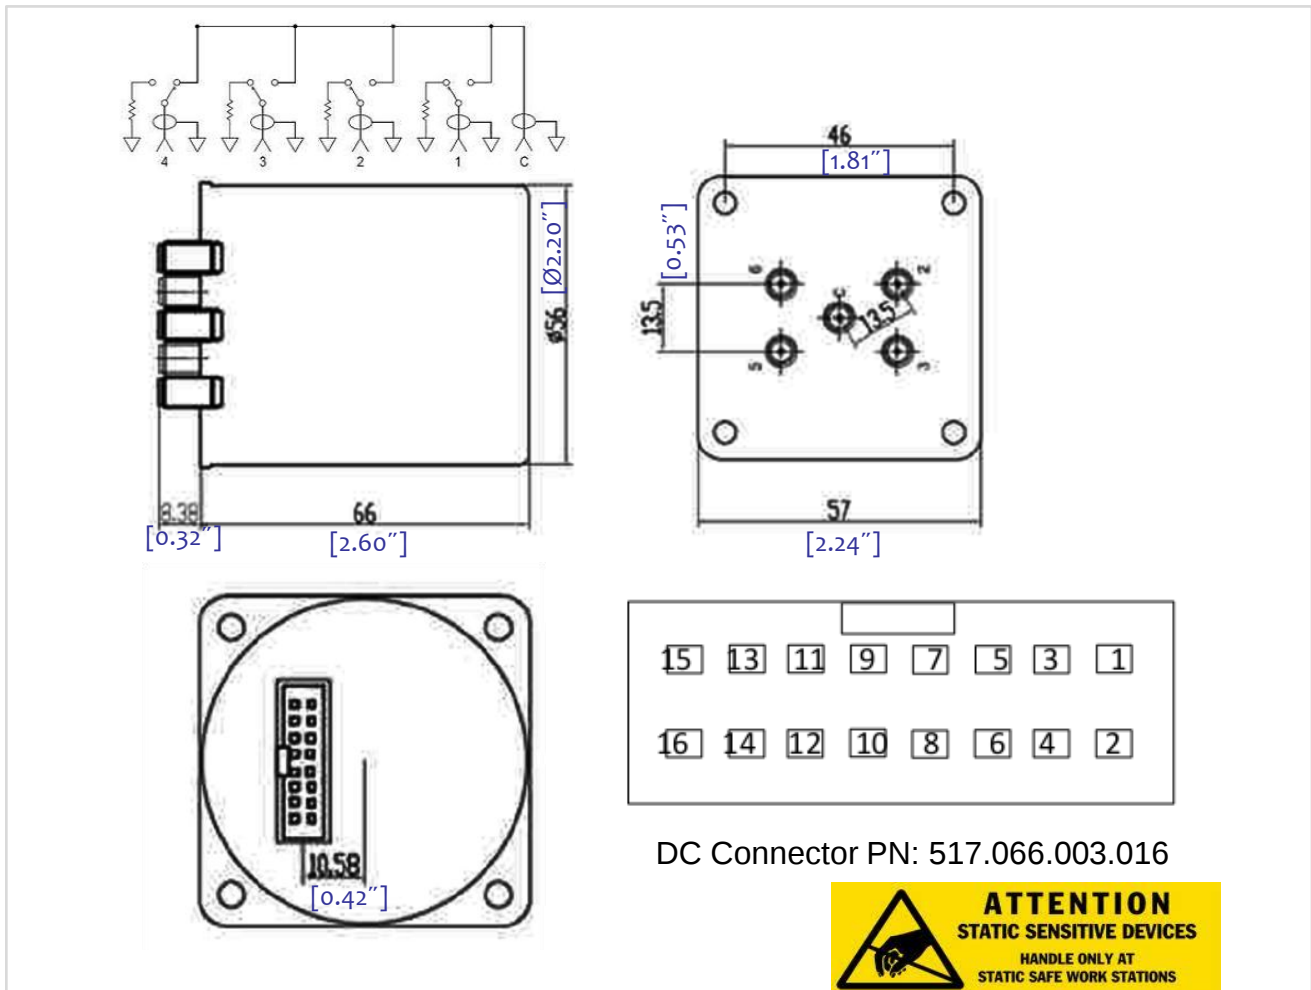

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.