

Absorptive SP4T Electro-Mechanical Switch DC – 26.5GHz



Product Description

RFSP4T26EMA-T is an absorptive SP4T electro-mechanical switch with a frequency range of DC to 26.5GHz.

The power of this switch is 1W Max. The typical insertion loss is 0.5dB and the Isolation is 70dB with the speed of 20ms. This electromechanical switch works with a +24VDC power supply.

The working temperature of this product is between - 25°C and + 70°C.

Features

- SP4T configuration
- Magnetic latching
- Operating life of 1 million cycles
- Guaranteed repeatability of 0.05dB up to 1 million cycles
- Excellent isolation, typically >80 dB to 20GHz
- Terminated ports
- TTL/5V CMOS compatible (optional)
- Control Cable Included

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Units
Frequency Range		DC – 26.5		GHz
Insertion Loss		@DC-4GHz	0.2	dB
		@4-12.4GHz	0.5	dB
		@12.4-26.5GHz	0.7	dB
VSWR		@DC-4GHz	1.2	:1
		@4-12.4GHz	1.35	:1
		@12.4-26.5GHz	1.7	:1
Isolation	80	@DC-4GHz		dB
	70	@4-12.4GHz		dB
	60	@12.4-26.5GHz		dB
Input Power			1	W
Switching Speed			20	ms
Life Cycles	1			Million
Repeatability			0.05	dB
Supply Current (VCC=+24VDC)		0.2 Typ.		A
Weight		0.42 Typ.		lbs.
Impedance		50		Ohms
Connector		3.5mm-Female		
Actuator Type		Latching		
Contact		Break Before Make		
Control		TTL		
Package		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	+22 VDC to +28 VDC

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-25°C to +70°C (Case Temperature)
Storage Temperature	-50°C to +85°C
Thermal Shock	-40°C → +70°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +70°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*For vibration testing details please see additional information section.


STATUS	PIN		TTL Drive Voltage (High = 2.5 to 5.5V, Low = 0 to 0.8V)				
	1	15	5	7	11	13	16
RF to 1	22-28V	GND	High	Low	Low	Low	Low
RF to 2			Low	High	Low	Low	Low
RF to 3			Low	Low	High	Low	Low
RF to 4			Low	Low	Low	High	Low
Reset			Low	Low	Low	Low	High

Note:


1. VCC:+22V to+28V (Rated voltage:+24V),GND:Ground
2. Applying "High level" to the corresponding pin can control the connection to the corresponding RF channel. At the same time, other RF channels are automatically disconnected. When the High level is applied to the "Reset" pin, all RF channels of the switch are disconnected. Note that applying "High leve" to multiple pins at one time is forbidden and can damage the switch. In the case of an absorptive switch model, disconnected ports are connected to the built-in 50 Ω load.

Typical Performance Plots


Insertion Loss@+25°C

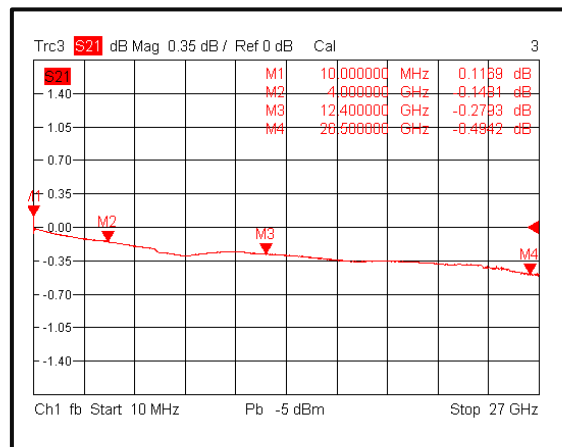


Input VSWR@+25°C

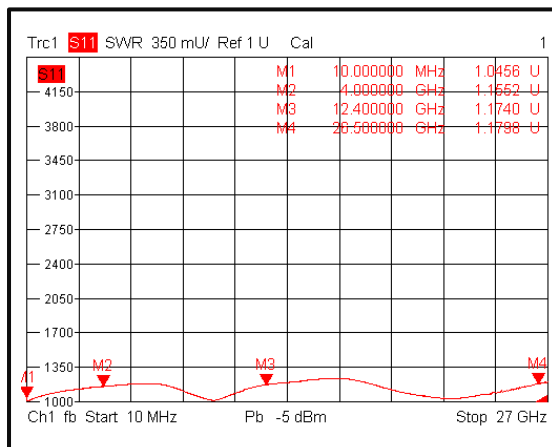


Output VSWR@+25°C

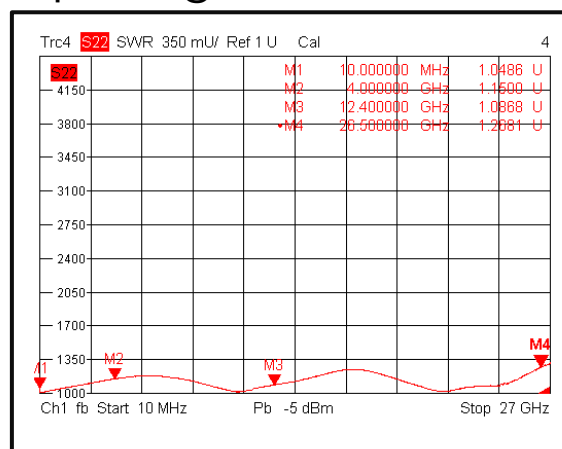


Isolation@+25°C

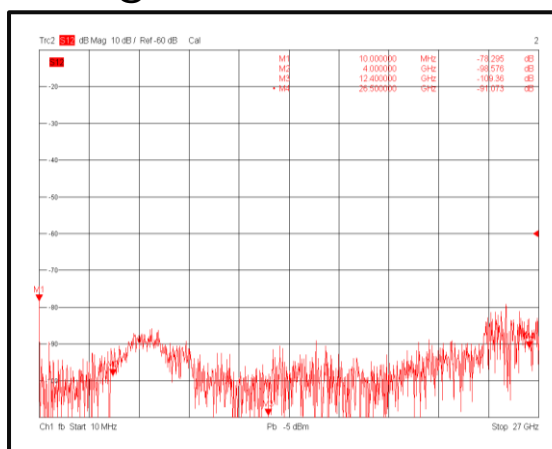

Insertion Loss @-25°C

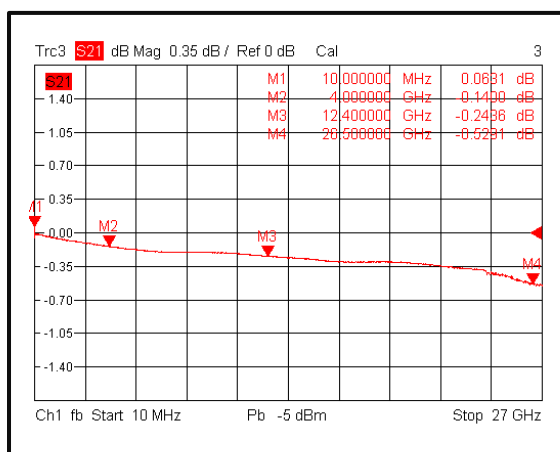


Input VSWR @-25°C

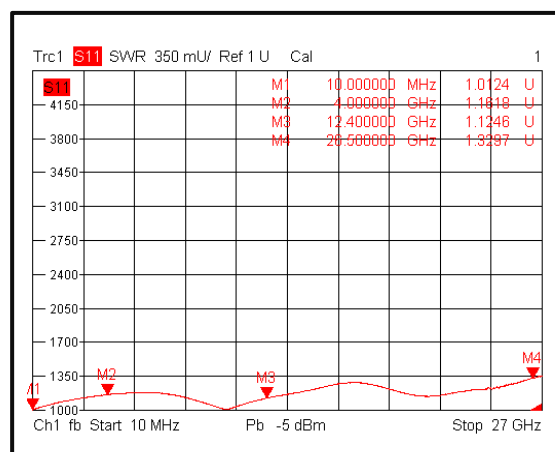


Typical Performance Plots


Output VSWR @-25°C

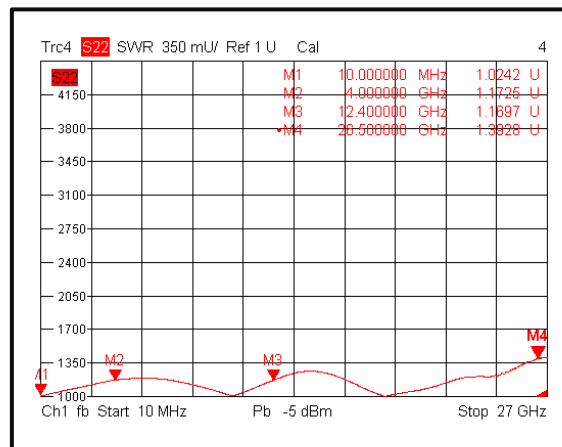


Isolation @-25°C

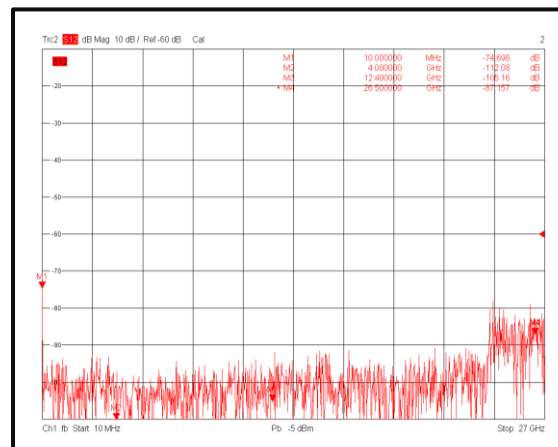


Insertion Loss @+70°C

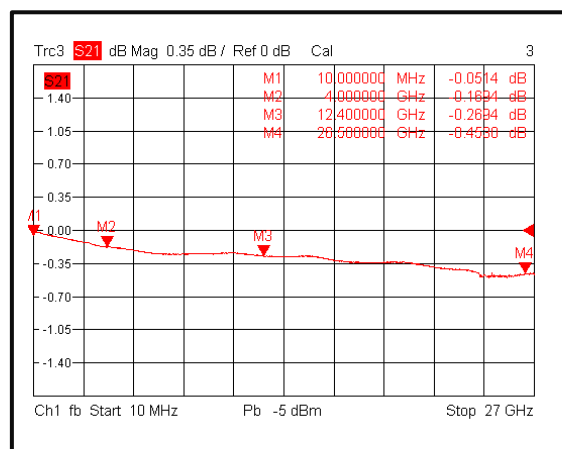


Input VSWR @+70°C

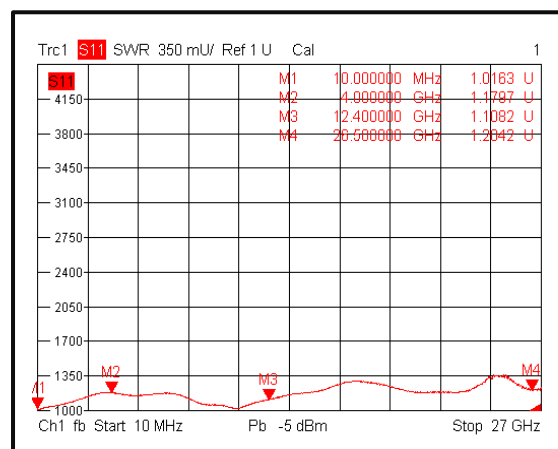

Output VSWR @+70°C

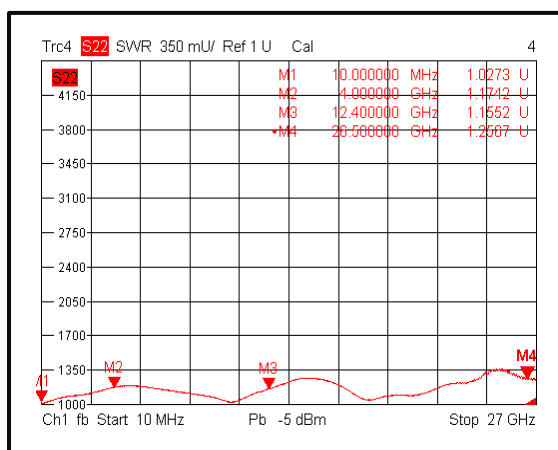


Isolation @+70°C

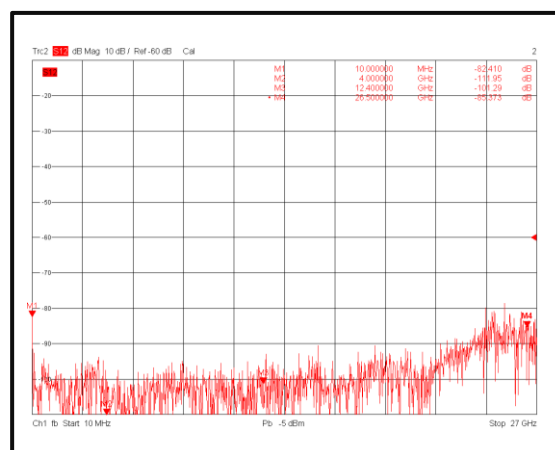


Typical Performance Plots


Insertion Loss Temperature Coefficient

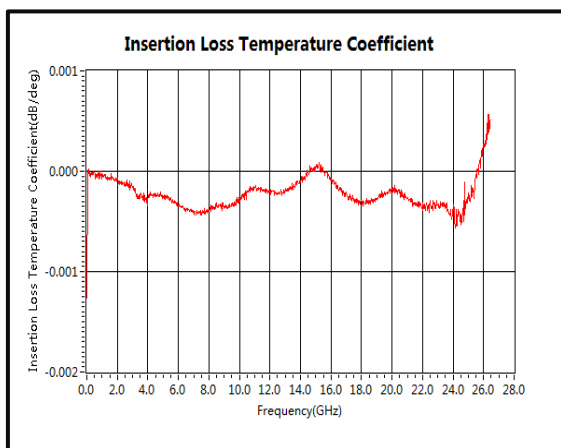


Insertion Loss vs. Temperature

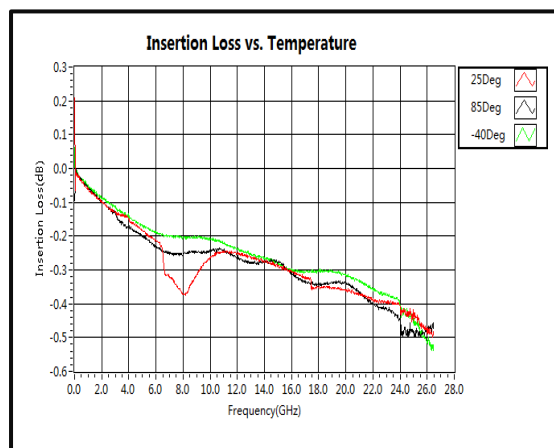


Switching Speed

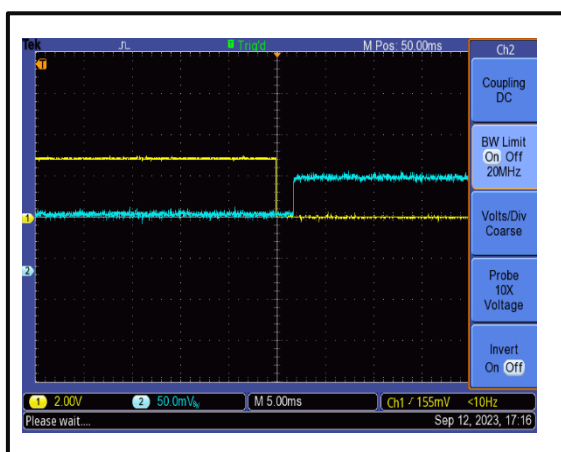

Switching Speed

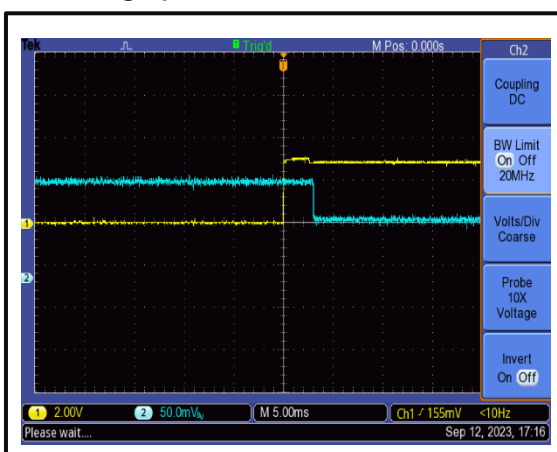

Outline Drawing

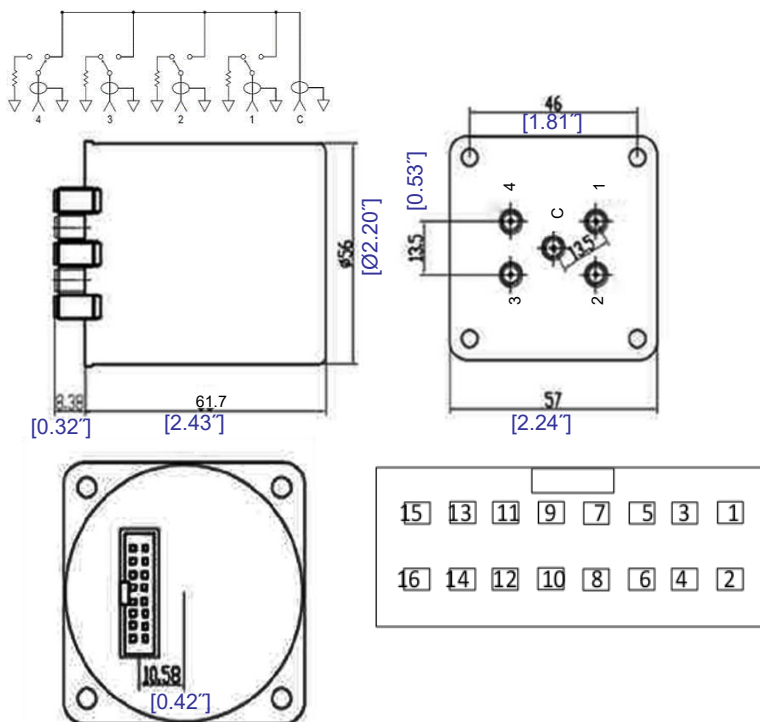

Notes:

1. Package Material: Aluminum
2. Finish: Black Paint
3. All dimensions are in millimeters [inches].



Additional Information

Documentation

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP4T26EMA-T	connectors 3.5mm-Female TTL	DC-26.5GHz SP4T Electromechanical Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.