

Absorptive SP8T Electro-Mechanical Switch DC – 26.5GHz



Product Description

RFSP8T26EMA-T is an absorptive SP8T electro-mechanical switch with a frequency range of DC to 26.5GHz.

The power of this switch is 100W Max. The typical insertion loss is 0.6dB and the isolation is 60dB with a switching speed of 20ms. This electromechanical switch works with a +28VDC power supply.

The working temperature of this product is between - 20°C and + 70°C .

Features

- SP8T configuration
- Magnetic latching
- Operating life of 100 million cycles
- Guaranteed repeatability of 0.1dB up to 100 million cycles
- Excellent isolation, typically >60 dB to 50GHz
- Terminated ports
- TTL/5V CMOS compatible (optional)
- Control Cable Included

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter		Min	Typ	Max	Units
Frequency Range			DC – 26.5		GHz
Insertion Loss	@DC-6GHz			0.4	dB
	@6-18GHz			0.6	dB
	@18-26.5GHz			0.8	dB
VSWR	@DC-6GHz			1.4	:1
	@6-18GHz			1.6	:1
	@18-26.5GHz			1.8	:1
Isolation	@DC-6GHz	70			dB
	@6-18GHz	60			dB
	@18-26.5GHz	60			dB
Input Power	@DC-6GHz			100	W
	@6-18GHz			50	W
	@18-26.5GHz			20	W
Switching Speed				20	ms
Life Cycles		1			Million
Repeatability				0.05	dB
Supply Current (VCC=+28VDC)			165		mA
Weight			0.668 Max.		lbs.
Impedance			50		Ohms
Connector			SMA-Female		
Control interface			25 core D-SUB pin		
Actuator Type			Latching		
Contact			Break Before Make		
Control			TTL		
Package		Epoxy Sealed (Standard)			
		Hermetically Sealed (Optional)			

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	26 – 30VDC

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-20°C to +70°C (Case Temperature)
Storage Temperature	-55°C to +85°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +70°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*For vibration testing details please see additional information section.


STATUS	PIN	VCC	GND	TTL Drive Voltage (High = 2.5 to 5.5V, Low = 0 to 0.8V)							
				TTL1	TTL2	TTL3	TTL4	TTL5	TTL6	TTL7	TTL8
RF to 1		+26~+30V	GND	High	Low	Low	Low	Low	Low	Low	Low
RF to 2				Low	High	Low	Low	Low	Low	Low	Low
RF to 3				Low	Low	High	Low	Low	Low	Low	Low
RF to 4				Low	Low	Low	High	Low	Low	Low	Low
RF to 5				Low	Low	Low	Low	High	Low	Low	Low
RF to 6				Low	Low	Low	Low	Low	High	Low	Low
RF to 7				Low	Low	Low	Low	Low	Low	High	Low
RF to 8				Low	Low	Low	Low	Low	Low	Low	High

Typical Performance Plots


Insertion Loss@+25°C

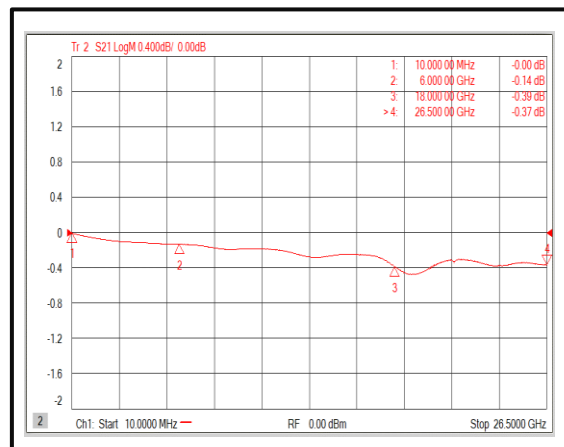


Input VSWR@+25°C

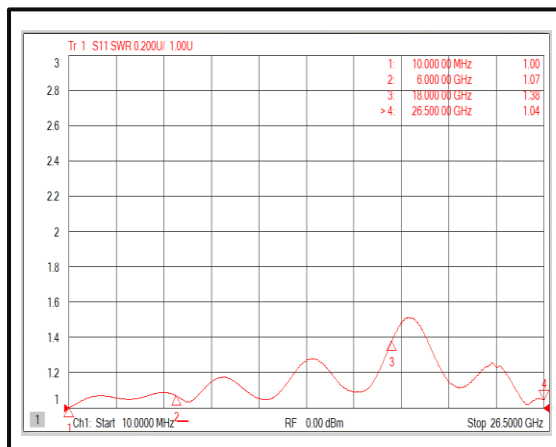


Output VSWR@+25°C

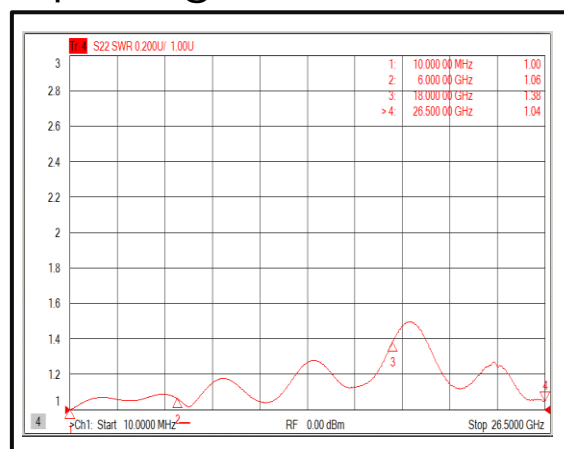


Isolation@+25°C

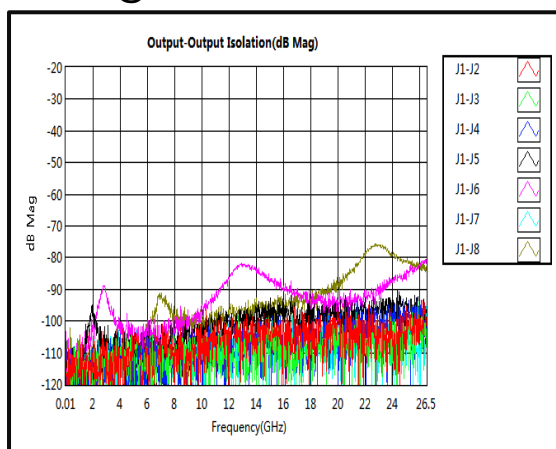

Insertion Loss @-20°C

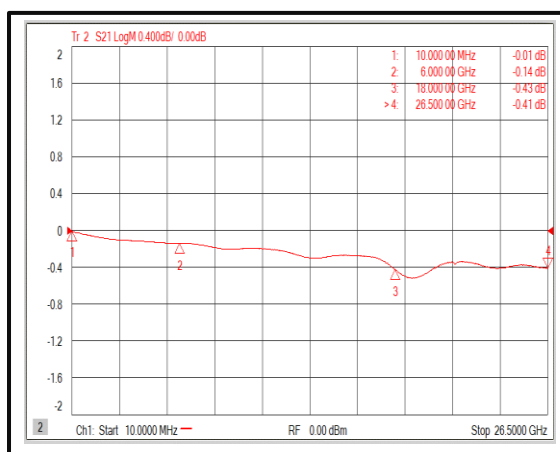


Input VSWR @-20°C

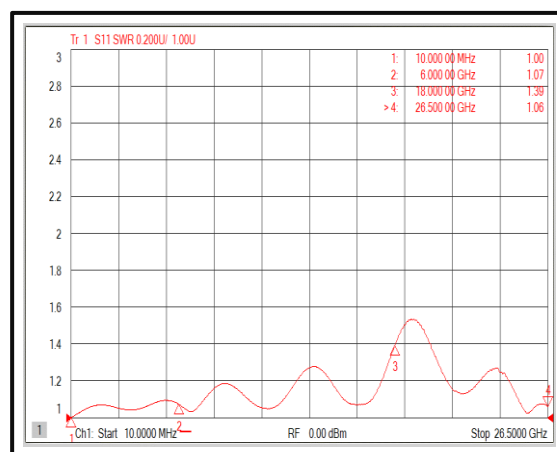


Typical Performance Plots


Output VSWR @-20°C

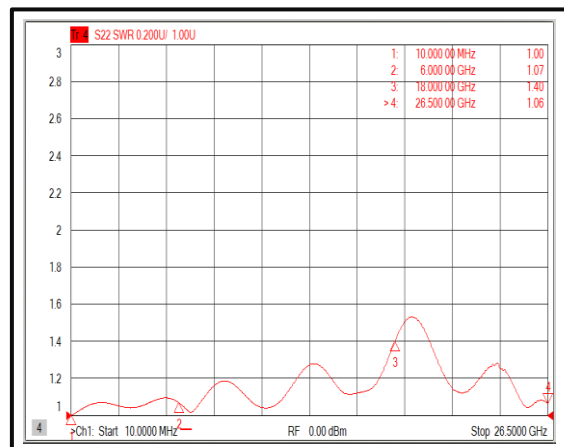


Isolation @-20°C

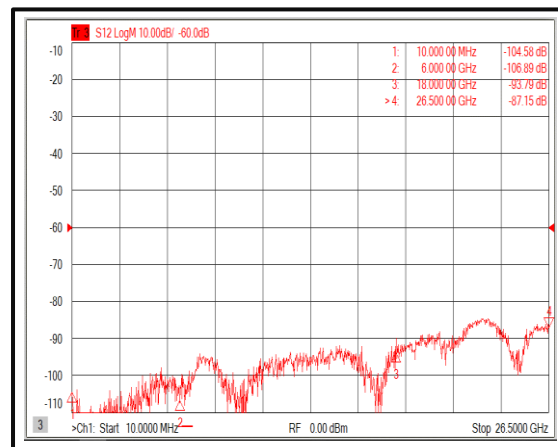


Insertion Loss @+70°C

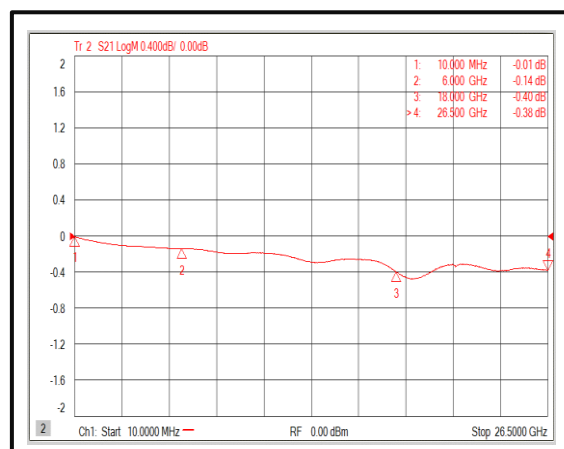


Input VSWR @+70°C

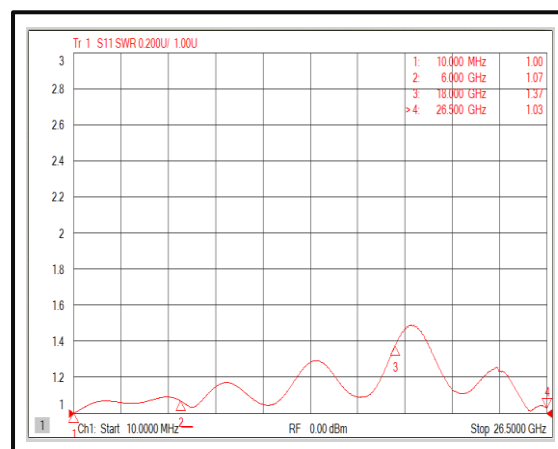

Output VSWR @+70°C

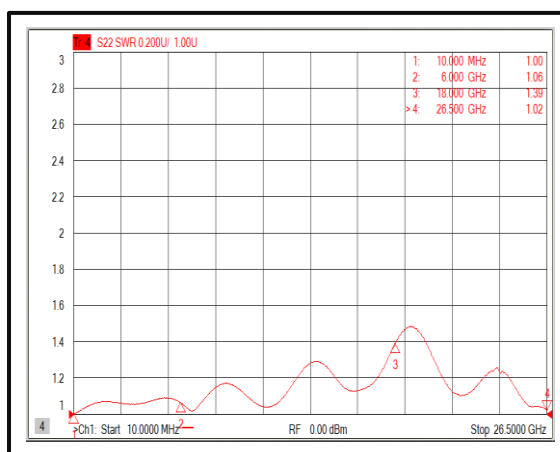


Isolation @+70°C

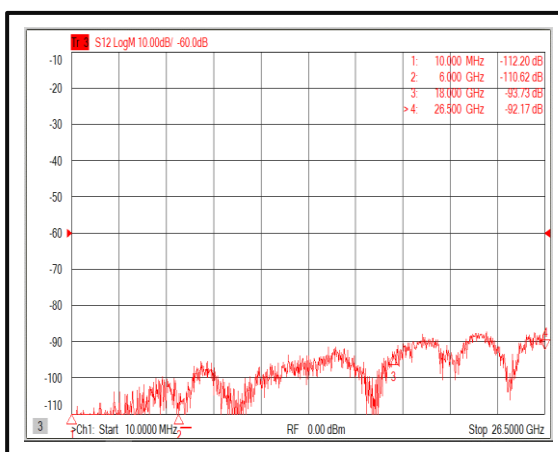


Typical Performance Plots


Insertion Loss Temperature Coefficient

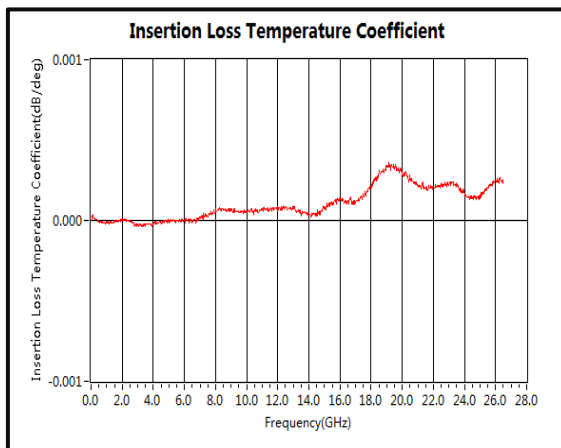


Insertion Loss vs. Temperature

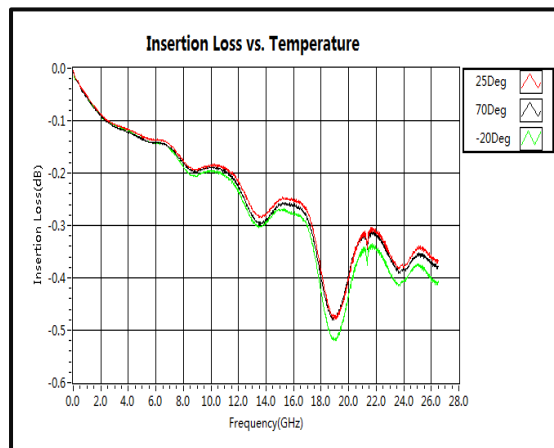



Switching Speed

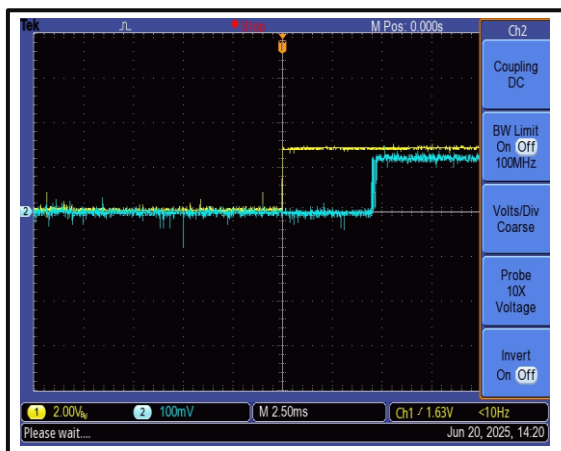

Switching Speed

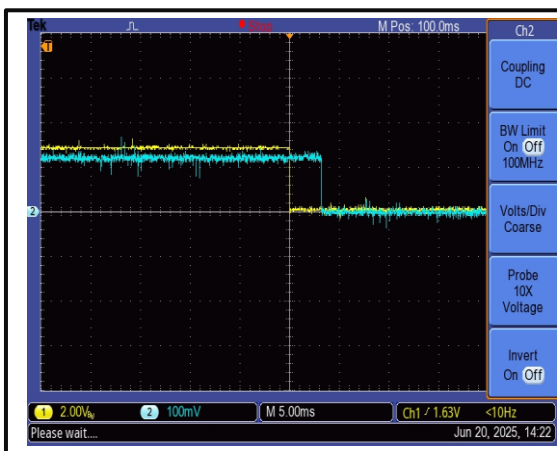

Outline Drawing

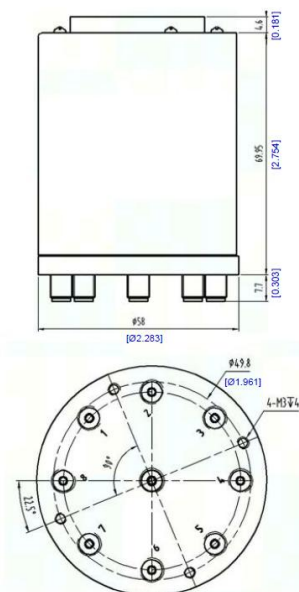

VCC: +28V
GND: Ground
TTL1~TTL8: Control Pins
Other Pins: No Connect

Notes:

1. Package Material: Aluminum
2. Finish: Black Paint
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.5 [0.02] unless otherwise specified.



Additional Information

Documentation

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP8T26EMA-T	connectors SMA-Female TTL	DC-26.5GHz SP8T Electromechanical Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.