

Absorptive SP8T Electro-Mechanical Switch DC-50GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Product Description

RFSP8T50EMA-T is an absorptive SP8T electro-mechanical switch with a frequency range of DC to 50GHz.

The power of this switch is 10W Max. The typical insertion loss is 1.2dB and the isolation is 60dB with a switching speed of 20ms. This electromechanical switch works with a +28VDC power supply.

The working temperature of this product is between - 20°C and + 70°C .

Features

- SP8T configuration
- Magnetic latching
- Operating life of 100 million cycles
- Guaranteed repeatability of 0.1dB up to 100 million cycles
- Excellent isolation, typically >60 dB to 50GHz
- Terminated ports
- TTL/5V CMOS compatible (optional)
- Control Cable Included

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter		Min	Typ	Max	Units
Frequency Range			DC – 50		GHz
Insertion Loss	@DC-26.5GHz			0.8	dB
	@26.5-40GHz			1.2	dB
	@40-50GHz			2.2	dB
VSWR	@DC-26.5GHz			1.6	:1
	@26.5-40GHz			1.8	:1
	@40-50GHz			2.2	:1
Isolation	@DC-26.5GHz	70			dB
	@26.5-40GHz	60			dB
	@40-50GHz	50			dB
Input Power	@DC-26.5GHz			10	W
	@26.5-40GHz			5	W
	@40-50GHz			2	W
Switching Speed				20	ms
Life Cycles		1			Million
Repeatability				0.1	dB
Supply Current (VCC=+28VDC)			165		mA
Weight			0.706		lbs.
Impedance			50		Ohms
Connector			2.4mm-Female		
Control interface			25 core D-SUB pin		
Actuator Type			Latching		
Contact			Break Before Make		
Control			TTL		
Package	Epoxy Sealed (Standard)				
	Hermetically Sealed (Optional)				

Absolute Maximum Ratings

Parameter	Rating
Supply Voltage Range	26 – 30VDC


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-20°C to +70°C (Case Temperature)
Storage Temperature	-55°C to +85°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +70°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

*For vibration testing details please see additional information section.

STATUS	PIN	VCC	GND	TTL Drive Voltage (High = 2.5 to 5.5V, Low = 0 to 0.8V)							
				TTL1	TTL2	TTL3	TTL4	TTL5	TTL6	TTL7	TTL8
RF to 1	26-30V	GND		High	Low	Low	Low	Low	Low	Low	Low
RF to 2				Low	High	Low	Low	Low	Low	Low	Low
RF to 3				Low	Low	High	Low	Low	Low	Low	Low
RF to 4				Low	Low	Low	High	Low	Low	Low	Low
RF to 5				Low	Low	Low	Low	High	Low	Low	Low
RF to 6				Low	Low	Low	Low	Low	High	Low	Low
RF to 7				Low	Low	Low	Low	Low	Low	High	Low
RF to 8				Low	Low	Low	Low	Low	Low	Low	High

Outline Drawing

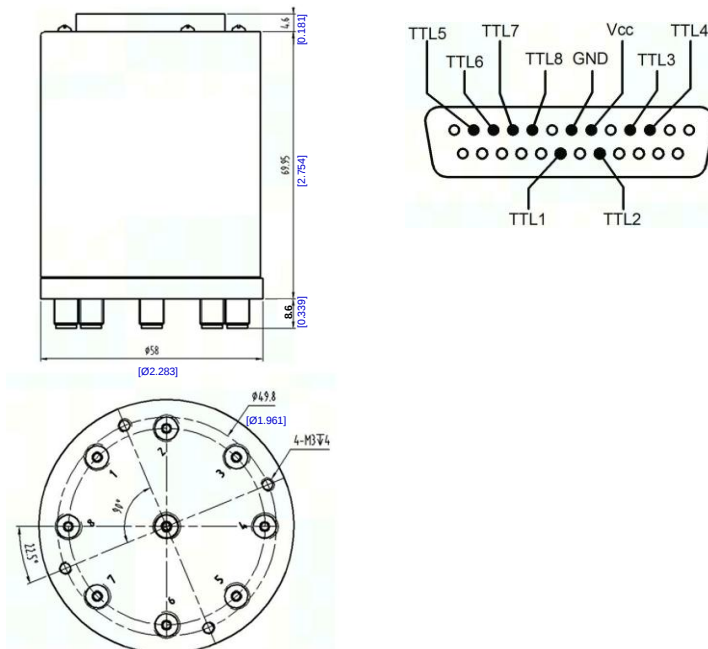

Notes:

1. Package Material: Aluminum
2. Finish: Gray Paint
3. All dimensions are in millimeters [inches].
4. Tolerances ± 0.5 [0.02] unless otherwise specified.



Additional Information

Documentation

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP8T50EMA-T	connectors 2.4mm-Female TTL	DC-50GHz SP8T Electromechanical Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.