



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RFSPDT40EMD

SPDT Reflective Electro-Mechanical Switch DC - 40GHz



Features

- SPDT configuration
- Magnetic latching
- Operating life of 1 million cycles
- Guaranteed repeatability of 0.05dB up to 1 million cycles
- Excellent isolation, typically >80 dB to 20GHz
- Terminated ports
- TTL / 5V CMOS compatible (Optional)

Description

RF-Lambda's multiport switch offers low insertion loss and high isolation, which is necessary for high performance test systems. The repeatability and reliability of this switch is vital to ATS measurement accuracy and can cut the cost of ownership by reducing calibration cycles.

Our electro-mechanical switches are made through RF-Lambda's rigorous design and tight manufacturing specifications.

SPDT Reflective Electro-Mechanical Switch DC - 40GHz

Part Number	Description	Typ	Low Freq (GHz)	High Freq (GHz)	Max Power Input(Watts)
RFSPDT40EMD-T or RFSPDT40EMD-S	Reflective Electromechanical Switches	SPDT	DC	40	2
Insert. Loss (dB)	VSWR (Max)	Isolation (dB)	Actuator Type	Switching Speed (ms Max)	Contact
0.4(DC~10GHz) 0.8 (10GHz~20GHz) 1.0(20GHz~40GHz)	1.3(DC~10GHz) 1.5 (10GHz~20GHz) 1.8(20GHz~40GHz)	70(DC~10GHz) 60(10GHz~20GHz) 60(20GHz~40GHz)	Latching	20	Break Before Make
Repeatability (dB) max.	Life Cycle	Connector	Biasing (VDC)	Current (mA dc)	Control
0.05	1,000,000 Cycles	2.9mm (f)	+5V(4.5-5V) +12V(10-16V) +24V(20-28V)	800mA dc 600mA dc 200mA dc	-T for TTL type -S for Ground type

* Result taken at 25°C



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS


RFSPDT40EMD

Reliability Test Matrix


Item	Standard	Description
Operation Temperature	MIL-STD-39016	-20°C~+70°C
Storage Temperature		-55°C~+85°C
Thermal Shock		-20°C~+70°C (1.5 hours holding, 10 times.)
Random Vibration		acceleration Spectrum Density 6 (m/s) , Total Root mean square root 92.6
Electrical & Temperature Burn In		Temperature +85°C 72 Hours
Shocking		1.Weight >20g, 50g half Sine wave for 11ms, Speed variation 3.44m/s 2.Weight <=20g, 100g Half Sine wave for 6ms, Speed variation 3.75m/s 3.6 Shocking Direction, 3 times each direction. Total 18 times.
Altitude	MIL-STD-883	Standard Part: 30,000 Ft (Epoxy Sealed Controlled Environment) Hermetically Sealed Part (Optional) 60,000 Ft 1.0 PSI min
Hermetical Seal(Optional)		MIL-STD-883(For Hermetical Seal Unit Only)

Typical Performance Plots


Insertion Loss

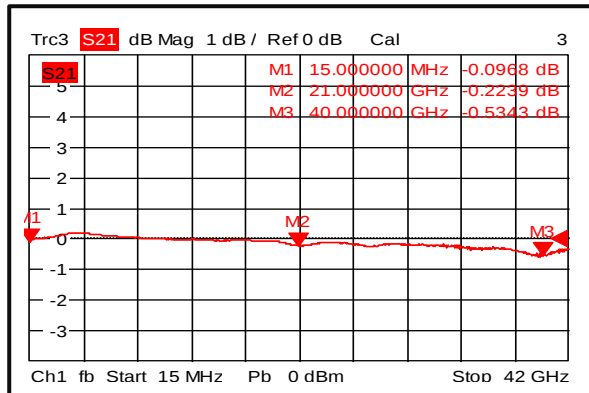


Input VSWR

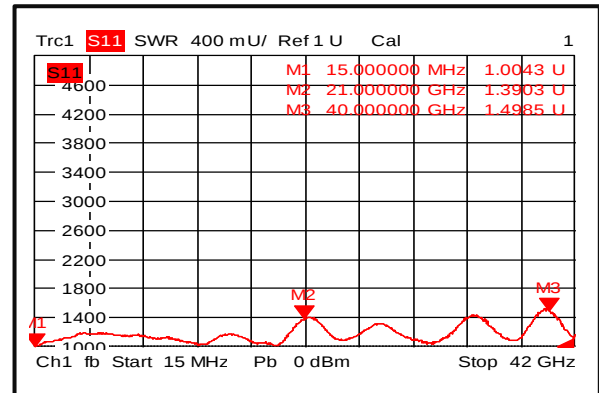

Output VSWR

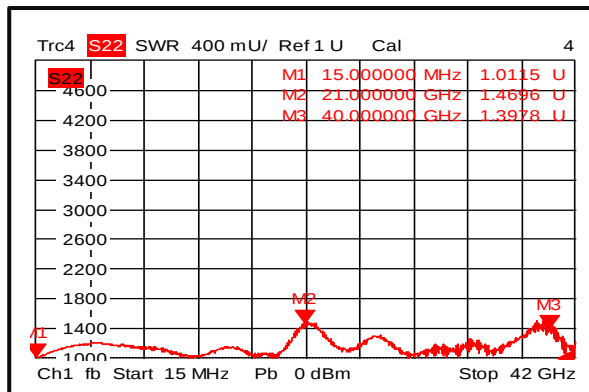




Isolation

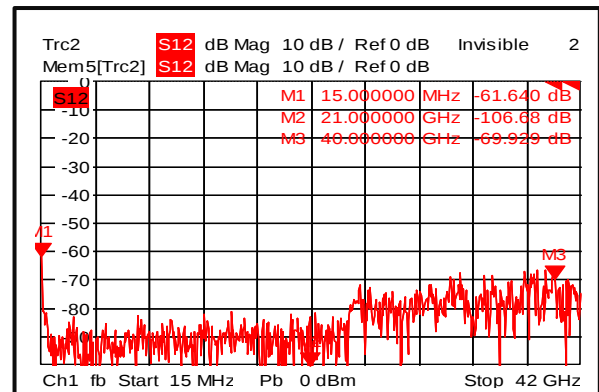

SPDT Reflective Electro-Mechanical Switch DC - 40GHz



+5V TTL Control Type -- (Standard)

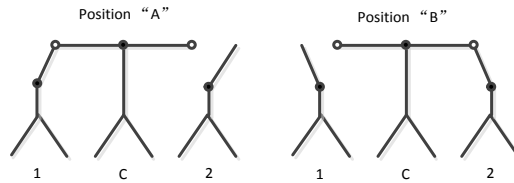

PIN 1 connect ground, PIN 2 connect +24V, PIN3 and PIN4 are control PINS.

TTL Control Type -- (Standard)

		TTL (3.3~5.5V)		Path
PIN1	PIN2	PIN3	PIN4	
GND	+24V/+12V/+5V	TTL	OPEN	PositionA (C↔ 1)
GND	+24V/+12V/+5V	OPEN	TTL	PositionB (C↔ 2)
GND	+24V/+12V/+5V	OPEN	OPEN	Keep the original path
GND	+24V/+12V/+5V	TTL	TTL	Forbidden


Notes:

- When the power path of the switch is in the off state, the switch port that is connected to the load has a max input power of 1W (CW).
- Pin 1 must always be connected to ground. if the negative pole is not connected to power supply ground, catastrophic failure will occur. sources must off
- Before switching, microwave signal must not be present.



Outline Drawing:

All Dimensions in mm [inches]

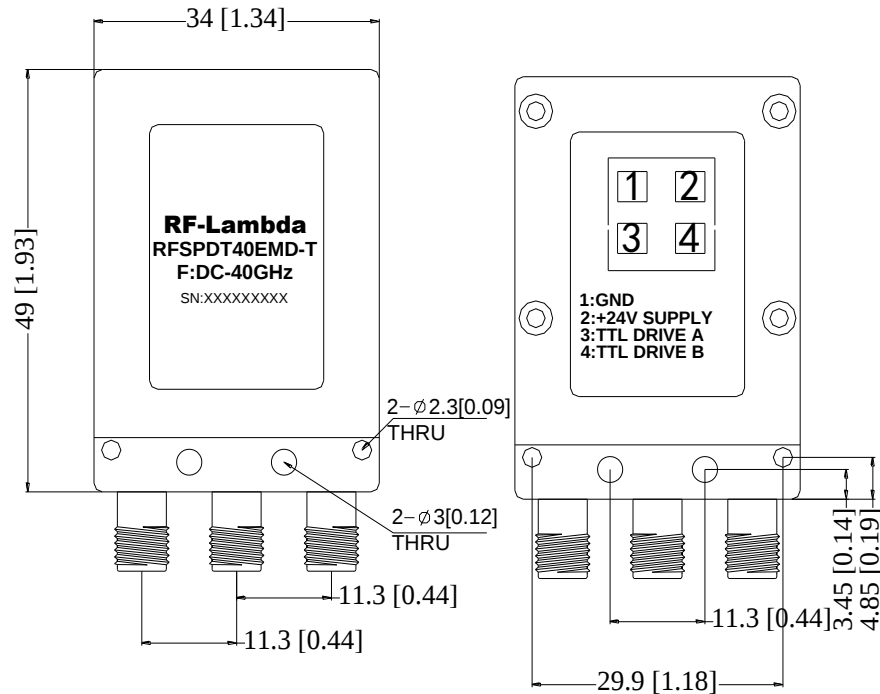

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.