

Ultra Wide Band Mixer (Bi-Directional) 7GHz - 40GHz



Product Description

RMX07G40GA is an ultra wideband mixer with a frequency range of 7 to 40GHz.

The LO power of the mixer is 14dBm. The conversion loss is 14dB.

The operating temperature of this product is -40 to +85°C.

Features

- Ultra Wide Band Mixer
- High Dynamic Range
- Low Noise Figure

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications (T_A=+25°C)

Parameter	Min	Typ	Max	Units
RF Input Frequency	7		40	GHz
LO Input Frequency	7		40	GHz
IF Output Frequency	DC		10	GHz
LO Power		14		dBm
Conversion Loss		14		dB
Input 1dB Compression (P1dB)		-1		dBm
IIP3		9		dBm
Isolation		-50		dB
Weight		0.028Max.		lbs.
RF / LO & IF Connectors		2.92mm-Female / SMA-Female		
Frequency Relationship		RF=IF+LO		
Package		Epoxy Sealed (Standard)		
		Hermetically Sealed (Optional)		

Absolute Maximum Ratings


Parameter		Rating
RF Input Power	RF	+21dBm
	IF	+21dBm
	LO	+25dBm

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

Typical Performance Plots


Conversion Loss

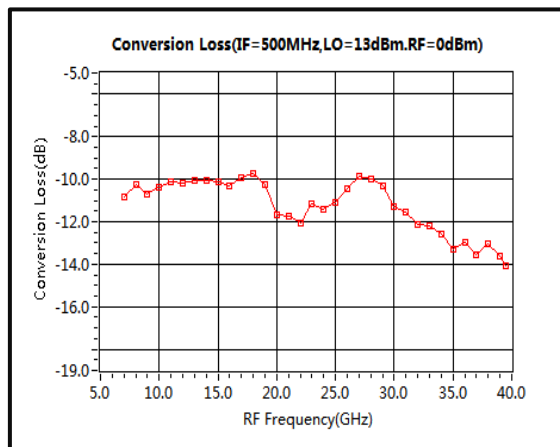


Conversion Loss vs. LO Power

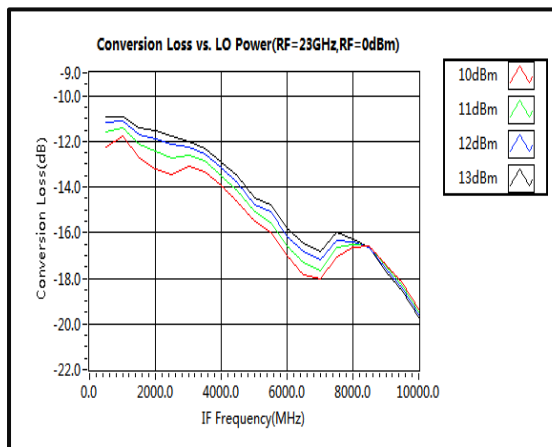


IF Level vs. RF Level(IF=RF-LO)

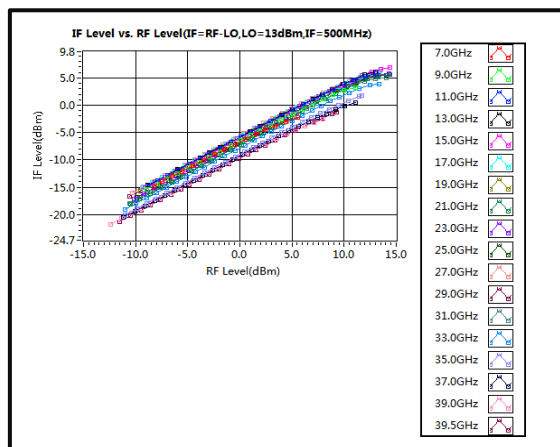


LO-IF Isolation

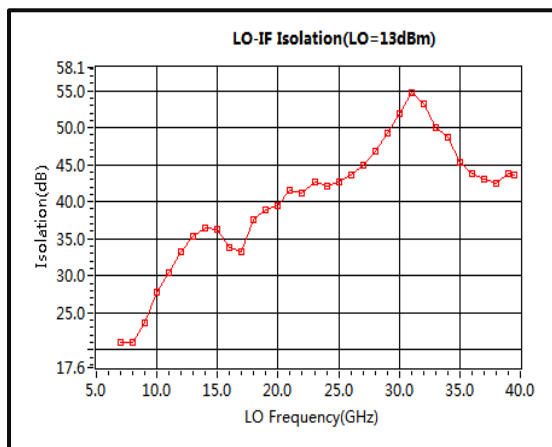

LO-RF Isolation

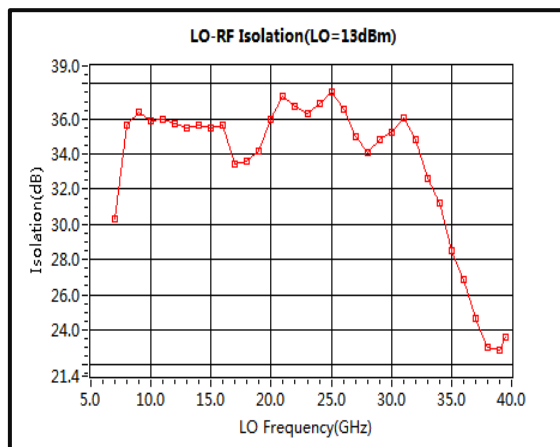


RF-IF Isolation

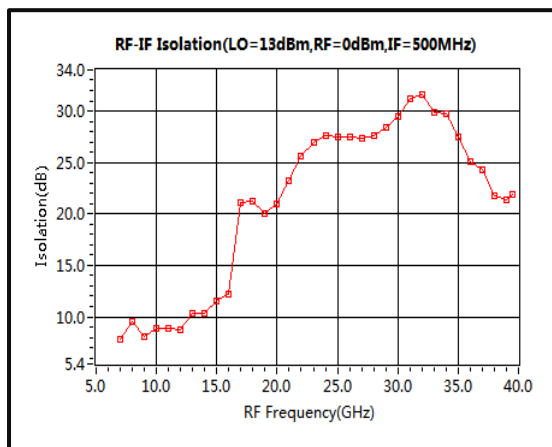


Typical Performance Plots


RF P1dB

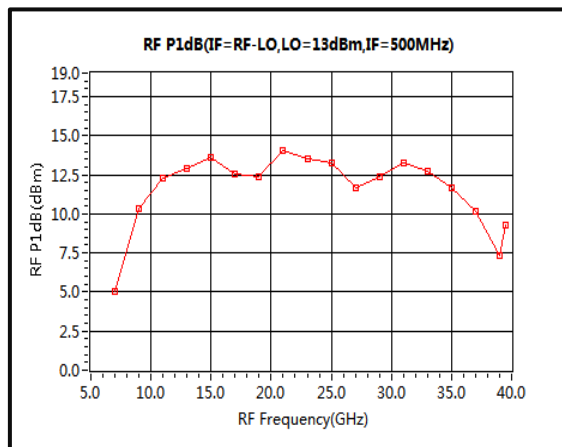

RF IIP3

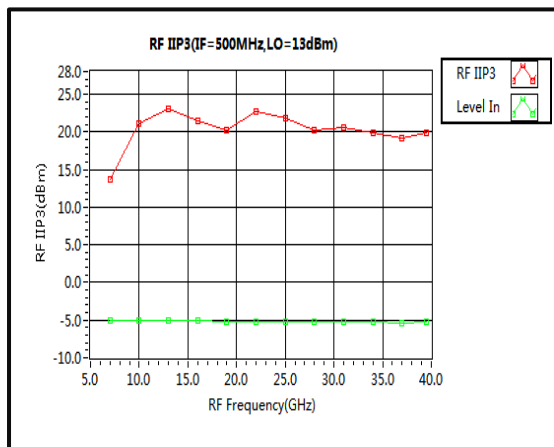


Outline Drawing

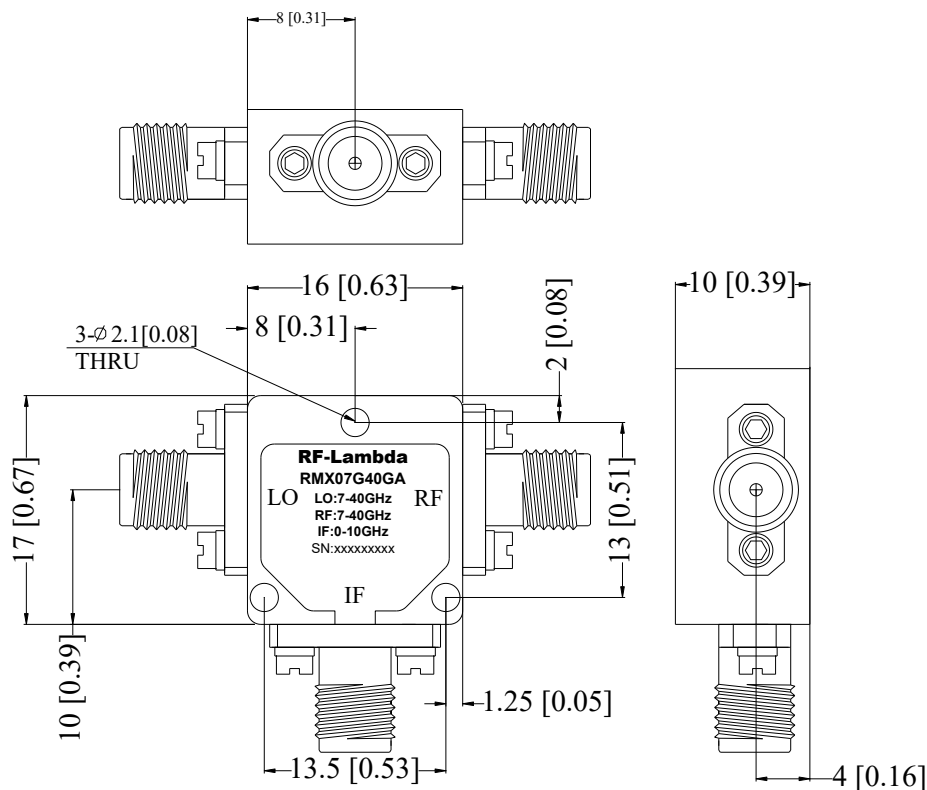

Notes:

1. Package Material: Aluminum
2. Finish: Gold Plated
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.1 [0.004] unless otherwise specified.
5. Standard torque wrench must be used to secure RF connectors.



Additional Information

Documentation

Webpage

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RMX07G40GA	Connectors 2.92mm-Female / SMA-Female	7GHz-40GHz Ultra Wide Band Mixer (Bi-Directional)

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.