



RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RWGCP112SC

Cross-Guide Directional Coupler 6.57 – 9.99GHz

Features

- Four-port configuration cross-guide coupler.
- The coupling level can be custom made ranging from 20 dB to 60 dB. The flange type, connector type and sizes can be customized.



Electrical Specifications, $T_A=25^\circ\text{C}$

Parameters	Min.	Typ.	Max.	Units
Frequency Range	6.57		9.99	GHz
Nominal Coupling	20~60 $\pm$ 1			dB
Directivity	15			dB
Insertion Loss			0.2	dB
VSWR Primary			1.10	: 1
VSWR Secondary			1.25	: 1
Waveguide Type	WR112			
Flange Type	UG138/U			
Input / Output Connectors	N-Female			
Material	Copper/Brass			
Inside Finish	Silver plating			
Outside Finish	Anticorrosion grey paint			

Environmental Specifications

Operational Temperature ($^\circ\text{C}$)	-45 to +85
Storage Temperature ($^\circ\text{C}$)	-55 to +125
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35c, 95%RH at 40 deg c
Shock	20G for 11msec half sine wave, 3 axis both directions

Crossguide Directional Coupler 6.57 – 9.99GHz




RF-LAMBDA

LEADER OF RF BROADBAND SOLUTIONS

RWGCP112SC

Outline Drawing:

All Dimensions in mm [inches]

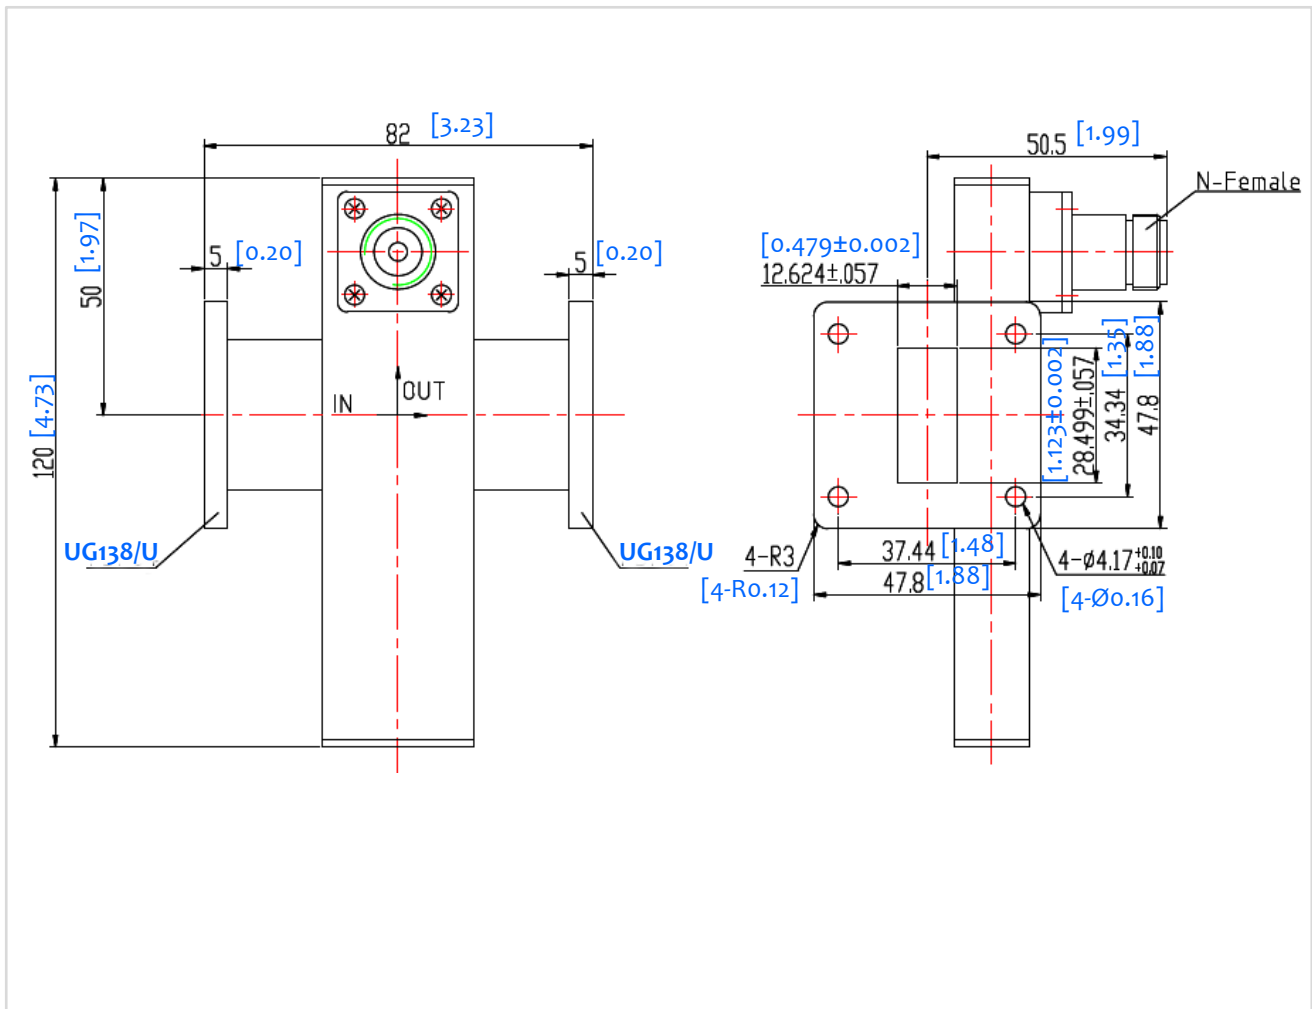

Crossguide Directional Coupler 6.57 – 9.99GHz

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.