

WR22 Waveguide 3-Port Directional Coupler 33GHz - 50GHz



Note: The photo is for illustration purposes only. Please refer to the outline drawing.

Features

- High power handling up to 50W
- Ultra Wide band operation
- High directivity within operational band

Product Description

RWGCP22SG is a WR22 waveguide 3-Port directional coupler with a frequency range of 33 to 50GHz.

The power of this directional coupler is 50W. The nominal coupling is 50dB with a typical directivity of 30dB.

The working temperature of this product is between - 40°C and + 85°C.

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications, TA = +25°C


Parameter	Min	Typ	Max	Units
Frequency Range	33		50	GHz
Nominal Coupling		50		dB
Directivity	30			dB
VSWR Primary			1.08	: 1
VSWR Secondary			1.5	: 1
Power Handling (CW)		50		Watts
Impedance		50		Ω
Input / Output Connectors	2.4mm-Female			
Waveguide Type	WR22			
Flange Type	UG383/U			
Package	Epoxy Sealed (Standard)			
	Hermetically Sealed (Optional)			

Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
*Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


*For vibration testing details please see additional information section.

Outline Drawing

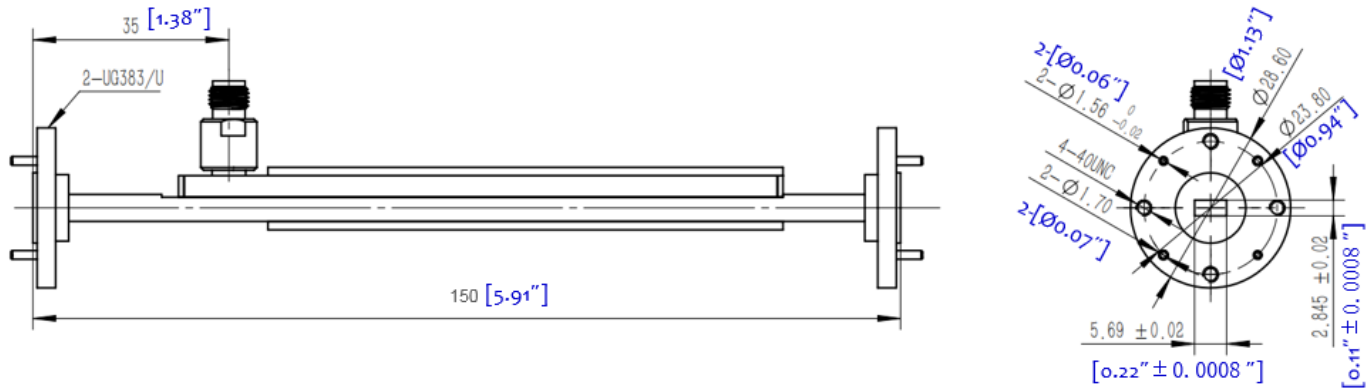

Notes:

1. Package Material: Brass
2. Inside Finish: Gold Plated; Outside Finish: Blue Paint
3. All dimensions are in millimeters [inches].
4. Standard torque wrench must be used to secure RF connectors.



Additional Information

Documentation

Webpage

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RWGCP22SG	Connectors 2.4mm-Female	33GHz-50GHz Waveguide 3-Port Directional Coupler

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.