

SAF-6039031437-12-S1

E Band Scalar Feed Horn Antenna, 60 to 90 GHz, 14 dBi Gain

SAF-6039031437-12-S1 is an E-band scalar feed horn antenna that operates from 60 to 90 GHz. The antenna offers a 14 dBi nominal gain, a typical half power beamwidth 37 degrees on the E-Plane and H-Plane. The antenna has side lobe levels of -25 dB on the E-Plane and H-Plane. The scalar feed horn is equipped with a waveguide transition, model number **SWT-12125-SB**, to transition from a 0.125" diameter circular waveguide to a WR-12 rectangular waveguide that supports linear polarization. The model with 0.125" diameter circular waveguide interface, which supports both circular and linear polarizations, is offered under model number **SAF-6039031437-125-S1**.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	60 GHz		90 GHz
Gain		14 dBi	
3 dB Beamwidth, E-Plane		37°	
3 dB Beamwidth, H-Plane		37°	
Sidelobes, E-Plane		-25 dB	
Sidelobes, H-Plane		-25 dB	
Return Loss		20 dB	
Polarization		Linear	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Antenna Port	WR-12 Waveguide
Flange Type	UG-387/U
Material	Brass
Finish	Gold Plated
Weight	1.5 Oz
Size	2.3" (L) X 0.75" (Ø)
Outline	AF-RE14-125

ECCN

EAR99

FEATURES

- Rectangular Waveguide Interface
- Precisely Machined
- Low Side Lobe Level
- High Return Loss
- Linear Polarization


APPLICATIONS

- Feed Horn for Gaussian Optical Antennas
- Feed Horn for Cassegrain Antennas
- Rapid System Setups
- Engineering Setups


SUPPLEMENTAL DETAILS




Simulated E-Plane Antenna Pattern @ 75 GHz

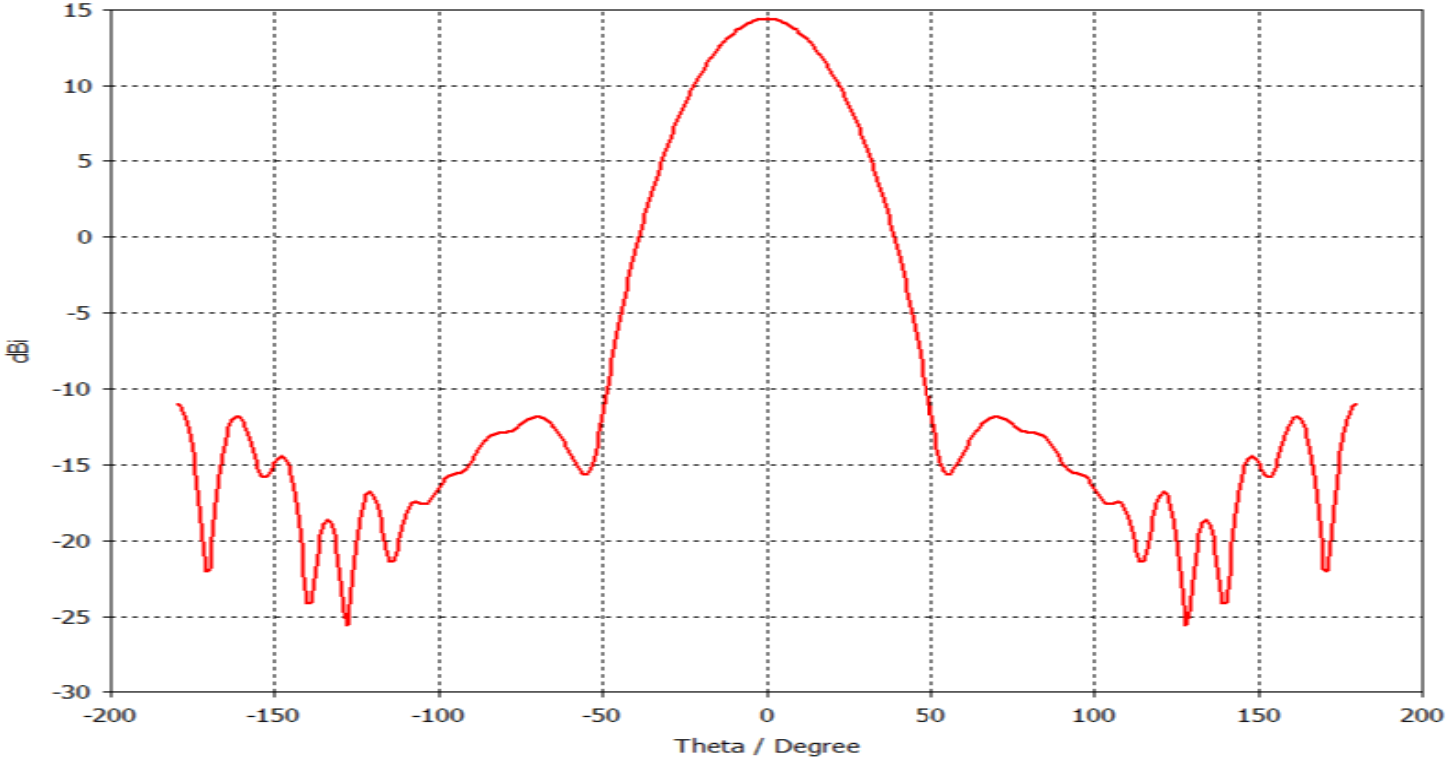

Simulated H-Plane Antenna Pattern @ 75 GHz

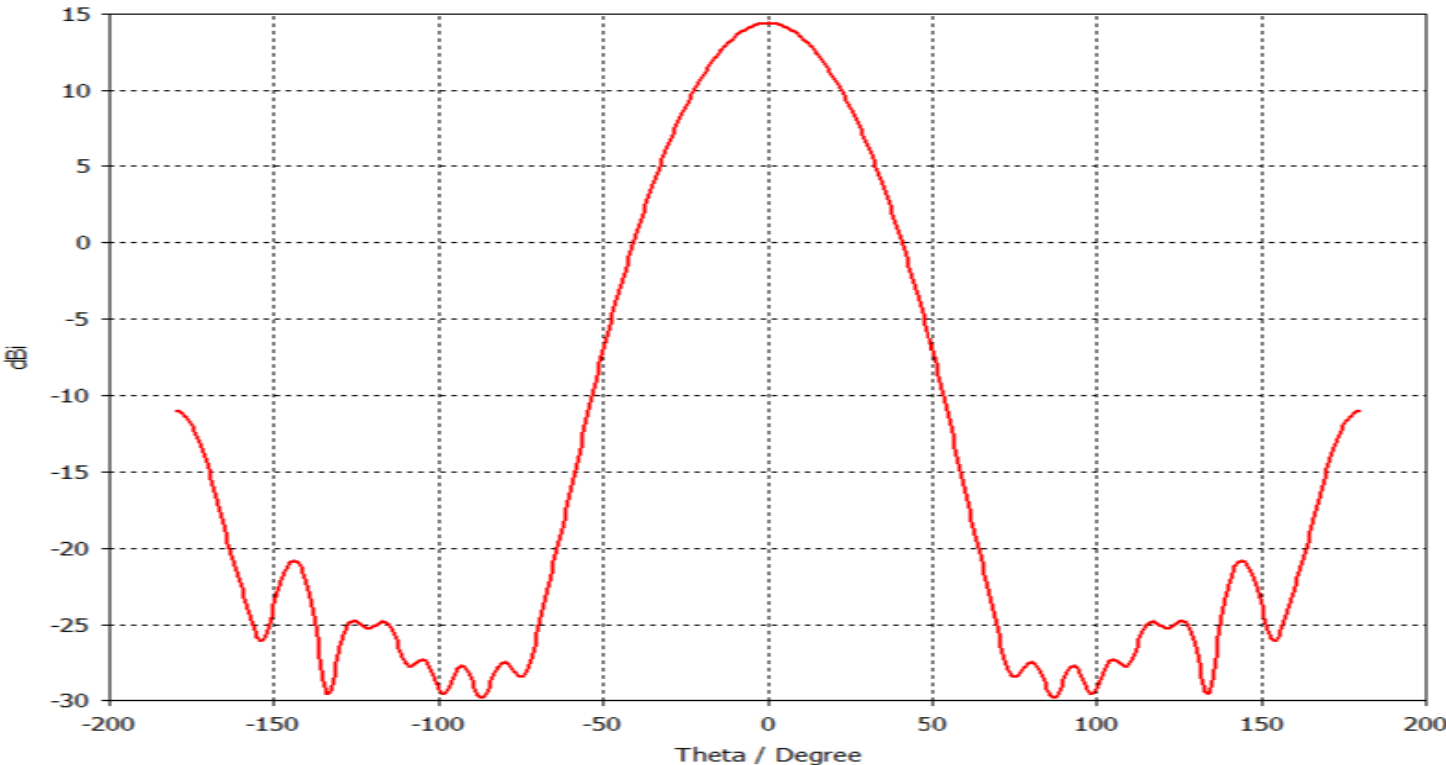


Simulated Gain (dBi) vs. Frequency (GHz)

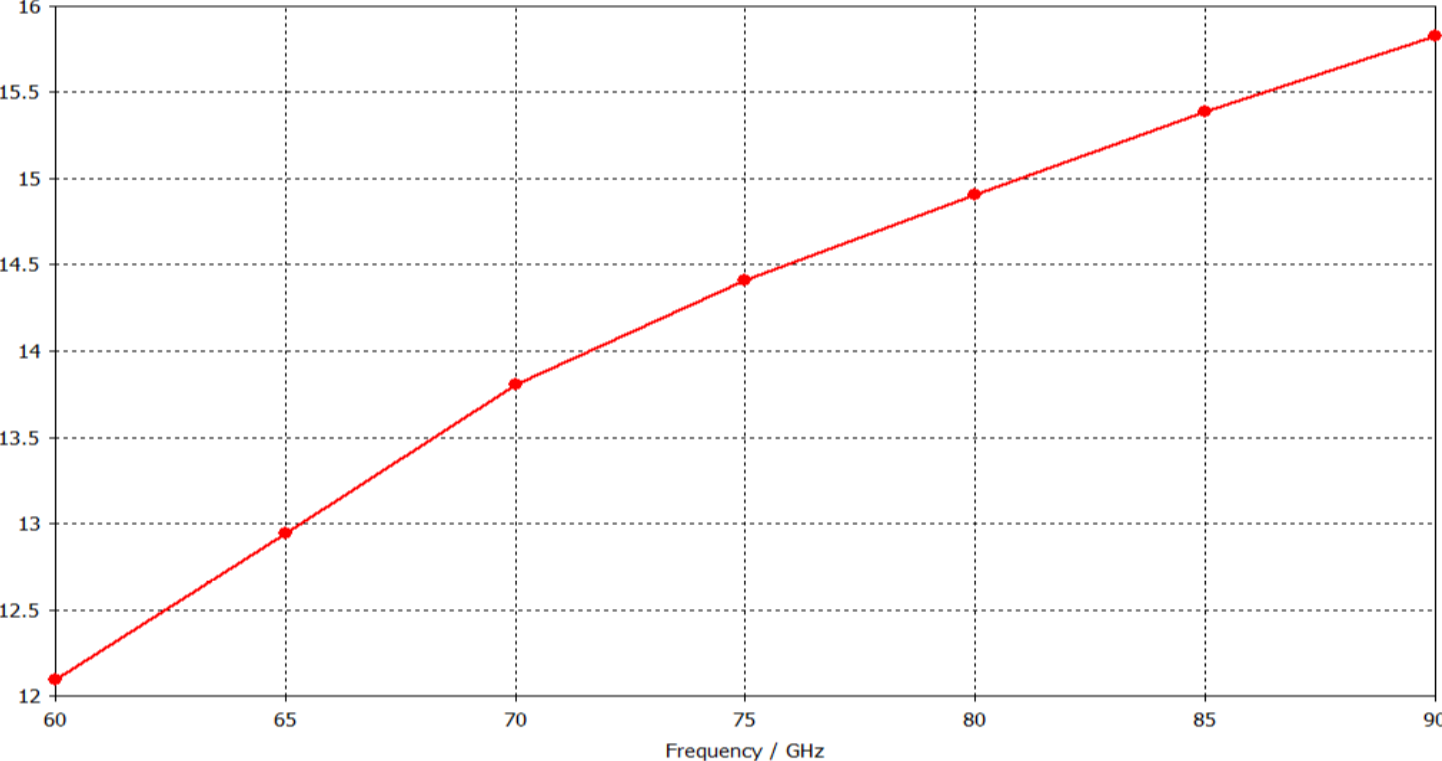

MAKING MILLIMETERWAVE ACCESSIBLE


Measured Return Loss vs. Frequency

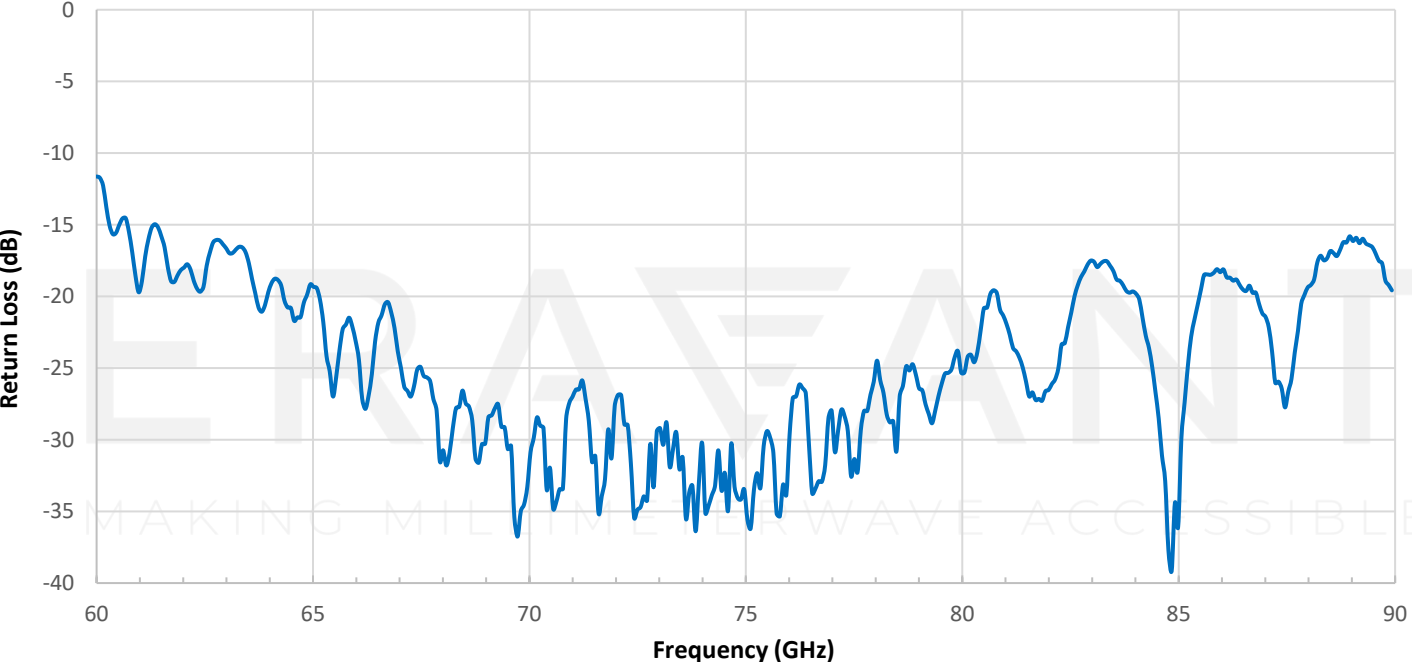

MAKING MILLIMETERWAVE ACCESSIBLE

SAF-6039031437-12-S1

Mechanical Outline: Unless otherwise specified, all dimensions are in inches [millimeters]

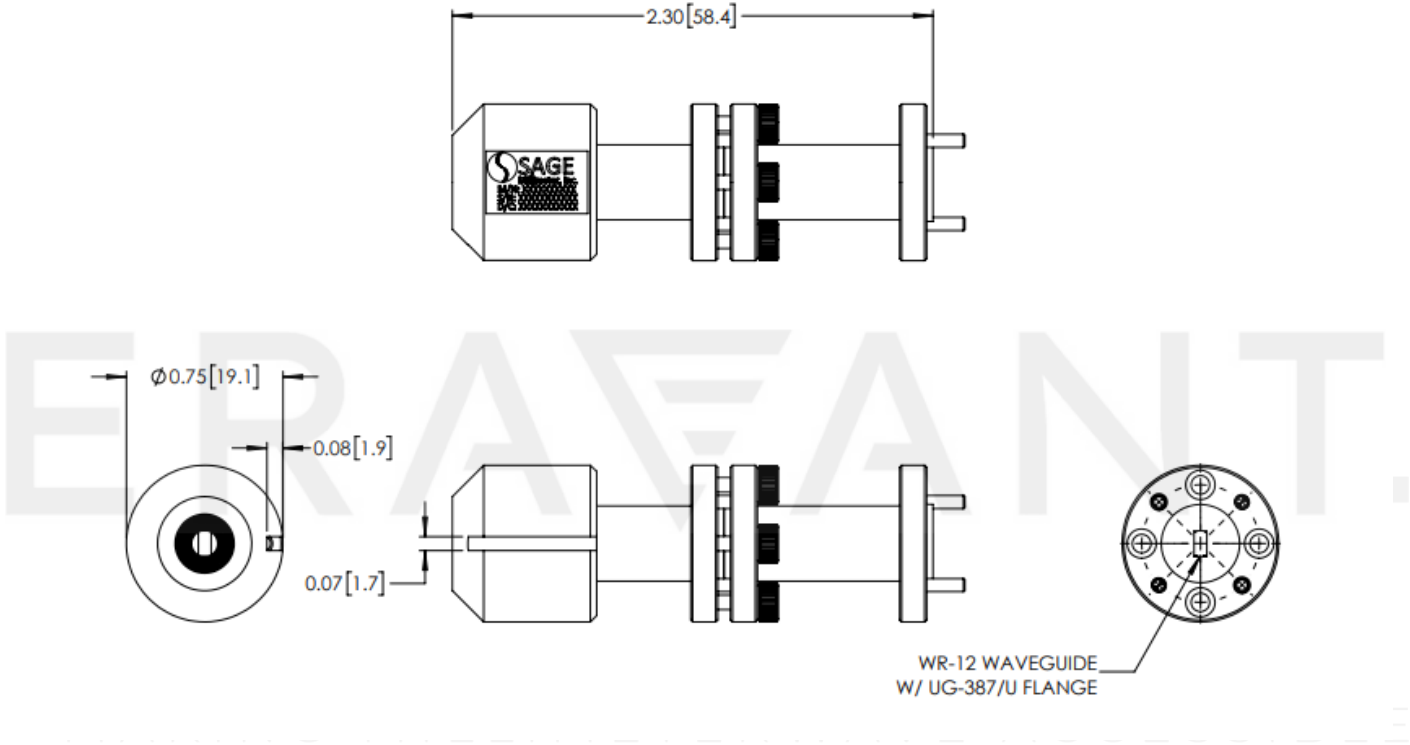

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.
- Any foreign objects in the antenna will cause performance degradation and possible device damage.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE