

SAS-293-31528-F1

Linear to Circular Polarizer, Ka Band, 26 to 33 GHz

SAS-293-31528-F1 is a Ka-band linear to circular polarizer that operates at 29.5 GHz with a ± 3.5 GHz bandwidth. The polarizer offers a typical insertion loss of 0.5 dB, a nominal axial ratio of 1.1, and a typical return loss of 20 dB. The polarizer is fixed and can be used for either right-handed or left-handed polarization based on the direction of the input signal. The polarizer is often combined with Eravant's WR-28 rectangular to $\text{\O}0.315$ " circular waveguide transition ([SWT-28315-SB](#)) and a $\text{\O}0.315$ " circular waveguide conical horn antenna ([SAC-2309-315-S2](#)) or scalar horn antenna ([SAF-2633331725-315-S1](#)) for various system applications.



Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Frequency Range	26 GHz	29.5 GHz	33 GHz
Bandwidth		0.5 GHz	
Axial Ratio		1.1	
Return Loss		20 dB	
Specification Temperature		+25°C	
Operating Temperature	-40°C		+85°C

Mechanical Specifications:

Item	Specification
Waveguide	$\text{\O}0.315$ " Circular Waveguide with UG-599/U-M Flange
Length	2.0"
Material	Aluminum
Finish	Gold Plated
Weight	0.6 Oz
Outline	AS-FAB-315

ECCN

EAR99

FEATURES

- Circular Waveguide Interface
- Low Insertion Loss
- Good Axial Ratio
- LHCP or RHCP


APPLICATIONS

- Antenna Ranges
- Waveguide Polarization Selection
- Radar Systems
- Communication Systems


SUPPLEMENTAL DETAILS



Typical Insertion Loss and Return Loss vs Frequency

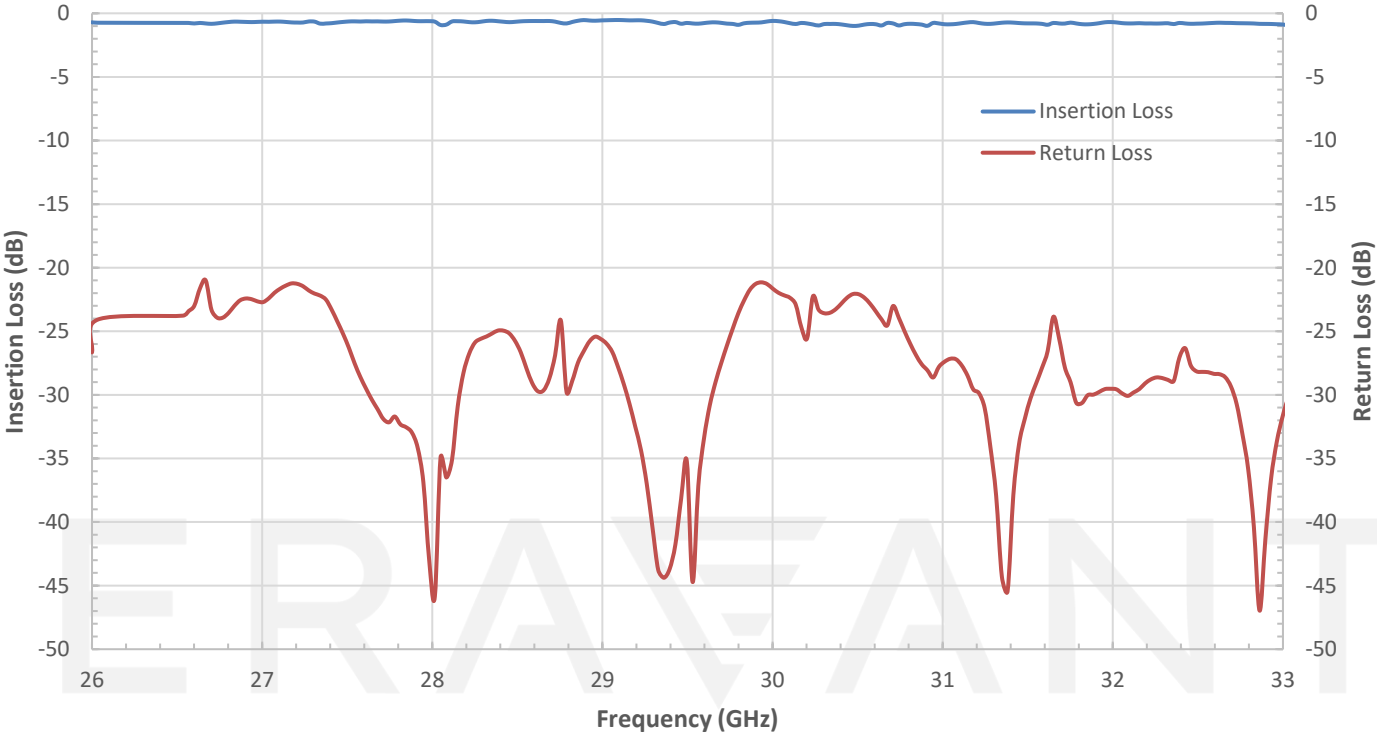


Typical Axial Ratio vs Frequency

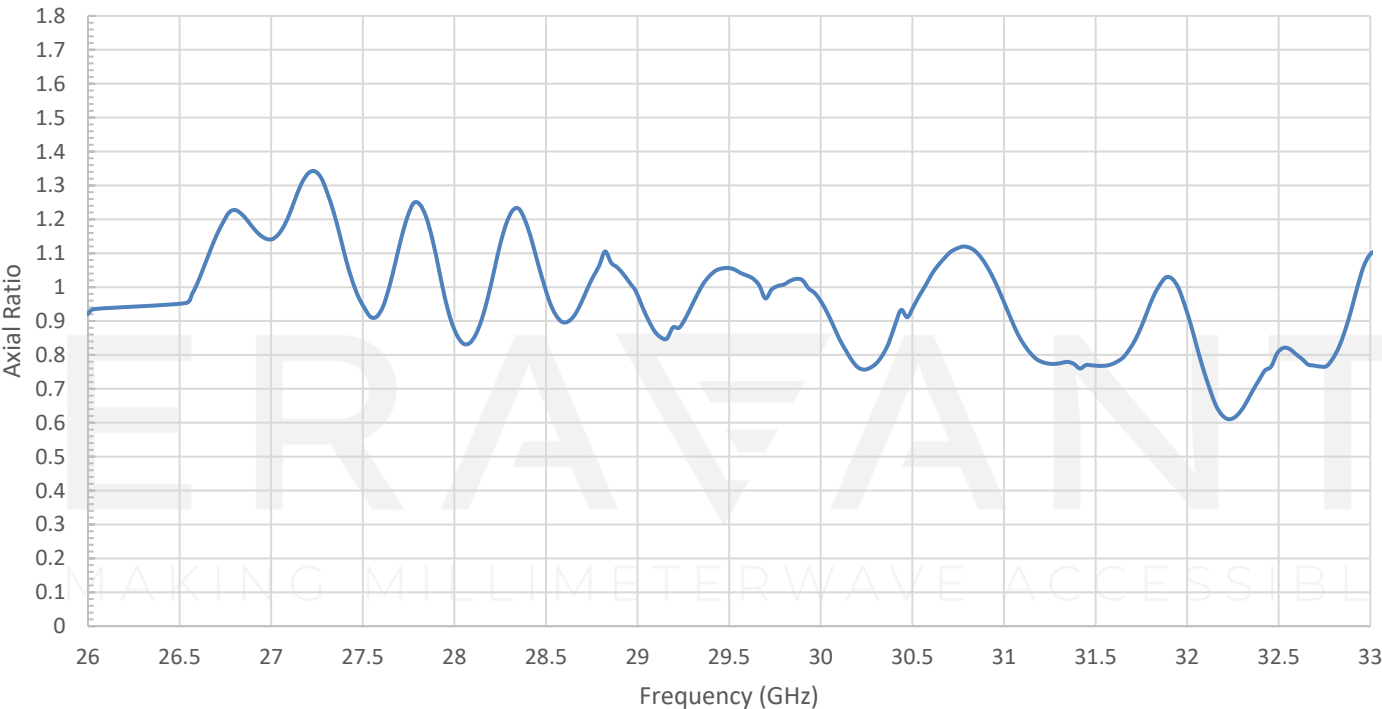

SAS-293-31528-F1

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

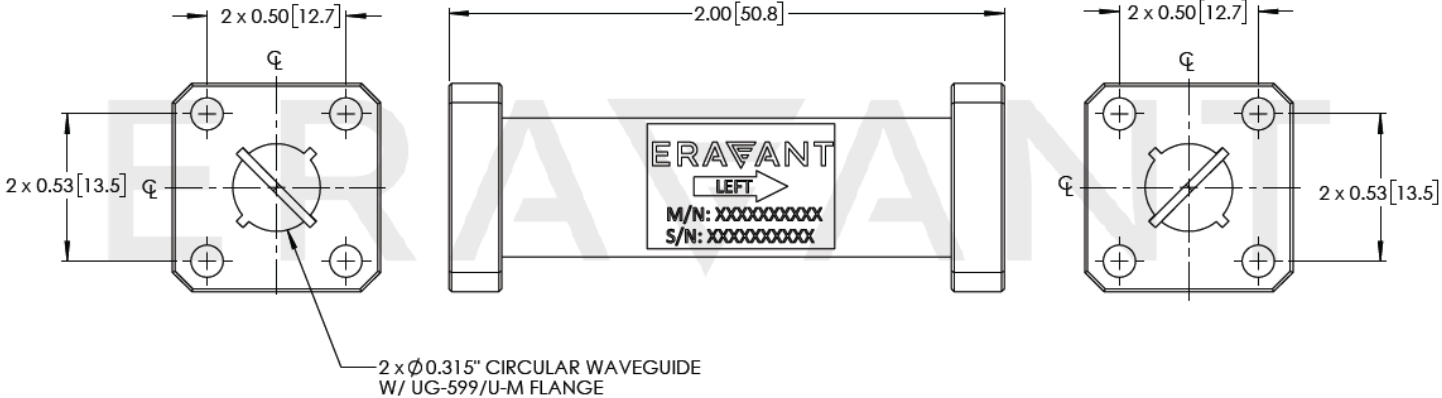

NOTE:

- On condition that test data is provided it is collected from a sample lot. Actual data may vary slightly from unit to unit. All testing is performed under +25 °C room temperature.
- On condition that simulated test data is provided, actual measured data may slightly vary.
- Eravant reserves the right to change the information presented without notice.

CAUTION:

- If a waveguide is present, any foreign objects in the waveguide will cause performance degradation and may damage or destroy the unit.

ERAVANT
MAKING MILLIMETERWAVE ACCESSIBLE

LHCP and RHCP Polarization Configuration Notes and Diagram:

- The polarizer's product label indicates the direction of **Left-Handed Circular Polarization (LHCP)**.
- An example configuration diagram is provided below. The diagram indicates the input and output ports and the orientation in which the polarizer is to be attached to the rest of the components to obtain a **LHCP** signal at the output port.
- The polarizer can be configured to obtain a **Right-Handed Circular Polarized (RHCP)** signal at the output port by reversing the input and output ports as shown in the second diagram.

