

W-Band Mechanically Tuned Gunn Oscillator, 110 GHz, ± 0.5 GHz Tuning

Description:

Model SOM-1141310-10-S1 is a W-band, mechanically tuned Gunn oscillator that utilizes a high performance InP Gunn diode and proprietary cavity design to deliver +10 dBm typical power. The oscillator features a frequency tuning range of 109.5 to 110.5 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a self-locking set screw for frequency trimming. Models with a micrometer for lab and test bench applications are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency	109.5 GHz	110.0 GHz	110.5 GHz
Power Output		+10 dBm	
Mechanical Tuning Range		± 0.5 GHz*	
Bias Tuning Range (+9.8 to +10.2 V _{DC})		± 100 MHz	
Bias Voltage		+10.0 V _{DC}	+10.5 V _{DC}
Bias Current		250 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

*Note: Actual tuning bandwidth may be wider, ± 1.0 GHz typical.

Mechanical Specifications:

Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Anti-cocking Flange
External Bias	SMA (F)
Mechanical Tuning	Self-Locking Set Screw
Body Material	Aluminum
Finish	Gold Plated
Weight	3.0 Oz
Outline	OM-SW-A-C




W-Band Mechanically Tuned Gunn Oscillator, 110 GHz, ± 0.5 GHz Tuning

Typical Measured Data:

Tuner Position	Frequency (GHz)	Power (dBm)
1/4 Clockwise	109.4	10.3
Factory Set	110.0	10.2
1/2 Counter Clockwise	110.6	10.3

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

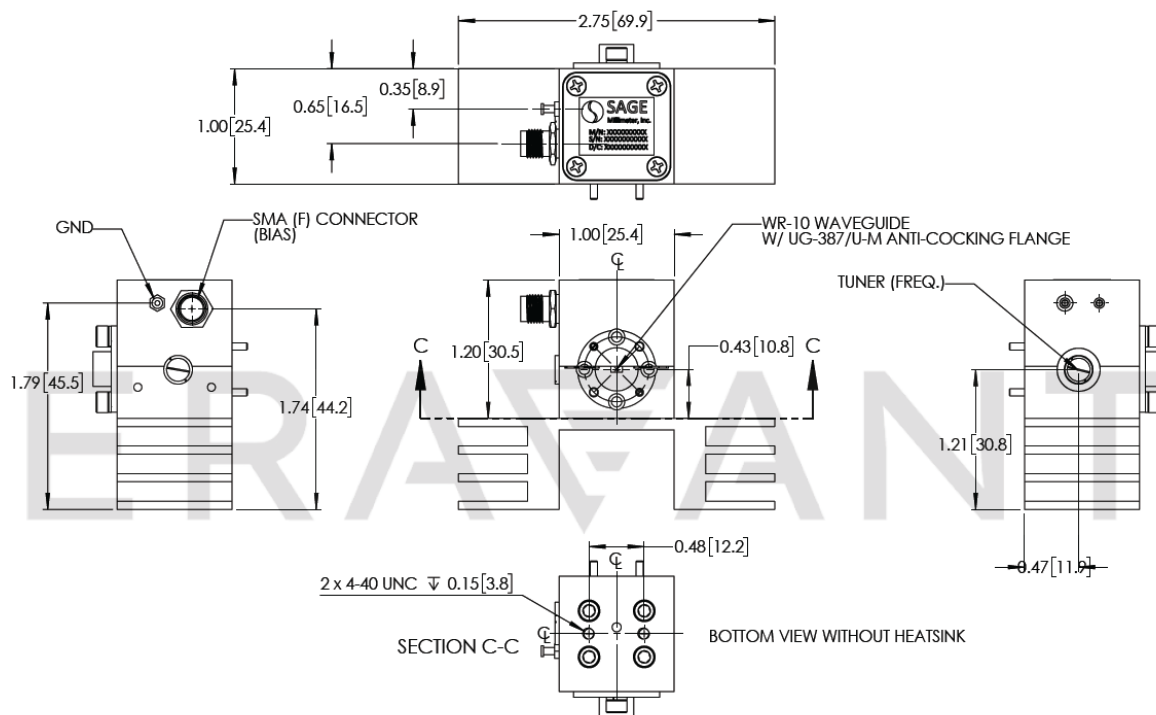

W-Band Mechanically Tuned Gunn Oscillator, 110 GHz, ± 0.5 GHz Tuning

Note:


- All data is presented using a limited sample lot, actual data may vary unit to unit.
- The data given above was tested under case temperature **35°C**.
- The Eravant Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in the appendix
- The optional AM/FM Modulator **SOR-M5** can be ordered separately to further enhance the functionality of the Gunn oscillator. The outline of the modulator is also shown in the appendix.
- The bias tuning feature can be used for electrical tuning and phase lock loop applications.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+10.5 Volts**.
- The case temperature of the device should never exceed **+50°C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix:

The Outline of the Gunn Oscillator Regulator Model SOR-R3

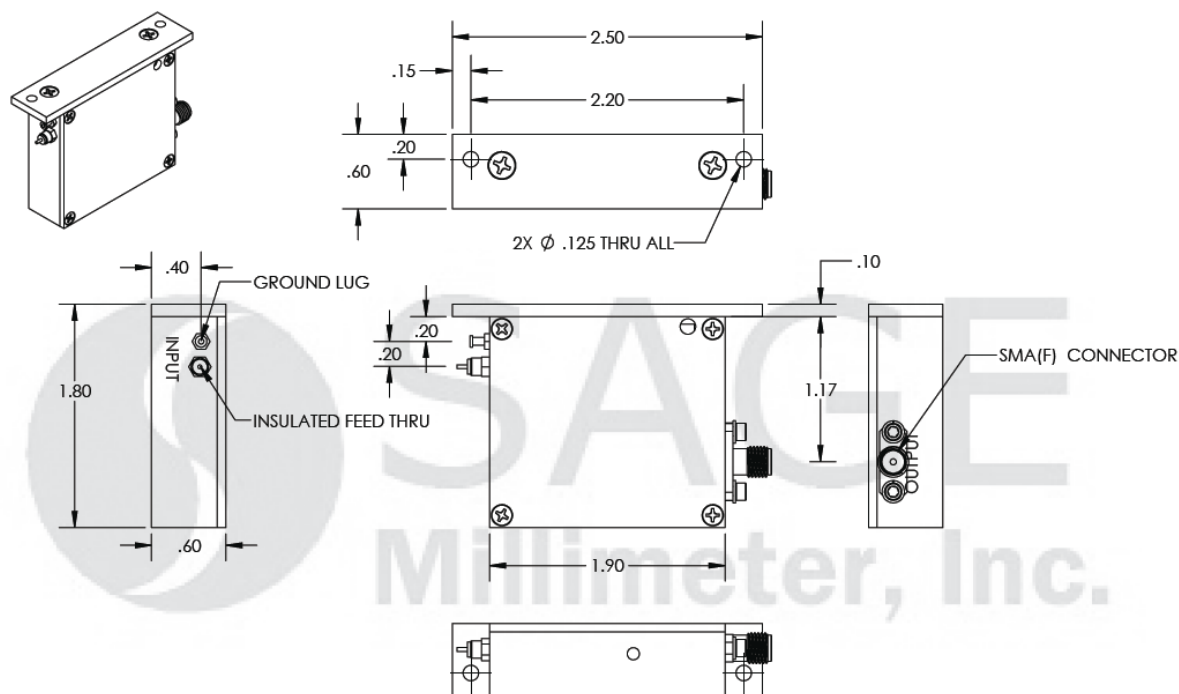

W-Band Mechanically Tuned Gunn Oscillator, 110 GHz, ± 0.5 GHz Tuning

The Outline of the Gunn Oscillator Regulator Model SOR-M5.

