

W-Band Mechanically Tuned Gunn Oscillator, 2 GHz Tuning Bandwidth

Description:

Model SOM-90302317-10-M1 is a W-Band, mechanically tuned Gunn oscillator that utilizes a high-performance GaAs Gunn diode and proprietary cavity design to deliver +17 dBm typical power. The oscillator features a frequency tuning range of 89 to 91 GHz and delivers low AM/FM noise and harmonic emissions. Compared to its counterparts, such as multiplier-based sources, the Gunn oscillator is a lower cost and cleaner source. The Gunn oscillator's frequency can also be tuned by varying the bias voltage, which is useful for phase-locking and electrical-tuning applications. The Gunn oscillator is equipped with a micrometer for quick frequency tuning and test bench applications. Models with a self-locking set screw for system integration are available under a different model number. The performance of the oscillator can be further enhanced by adding an optional isolator, Gunn oscillator modulator/regulator and temperature heater.



Features:

- Low AM/FM Noise and Harmonics
- Bias Tunable

Applications:

- Test Sources
- Signal Generation
- Lab Test Setups

Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		90 GHz	
Power Output	+16 dBm	+17 dBm	
Mechanical Tuning Range		±1 GHz	
Bias Tuning Range (+4.0 to +5.0 V _{DC})		±100 MHz	
Bias Voltage		+4.0 V _{DC}	+5.0 V _{DC}
Bias Current		750 mA	
Specification Temperature		+25°C	
Operating Temperature	0°C		+50°C

Mechanical Specifications:


Item	Specification
RF Port	WR-10 Waveguide with UG-387/U-M Flange
DC Bias	SMA (F)
Mechanical Tuning	Micrometer
Body Material	Aluminum
Finish	Gold Plated
Weight	3.6 Oz
Outline	OM-MW-A-C




W-Band Mechanically Tuned Gunn Oscillator, 2 GHz Tuning Bandwidth

Typical Frequency and Power Output vs. Micrometer Reading

Bias: +3.9 Vdc/704 mA

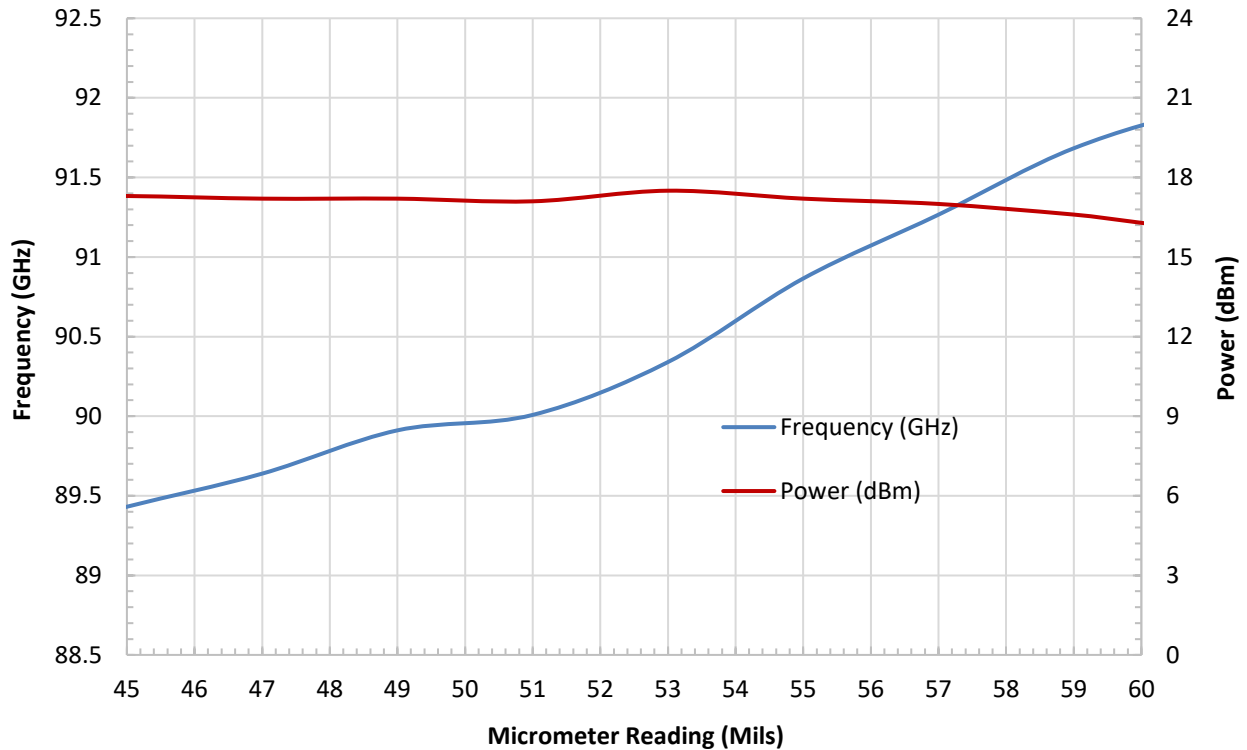

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches)

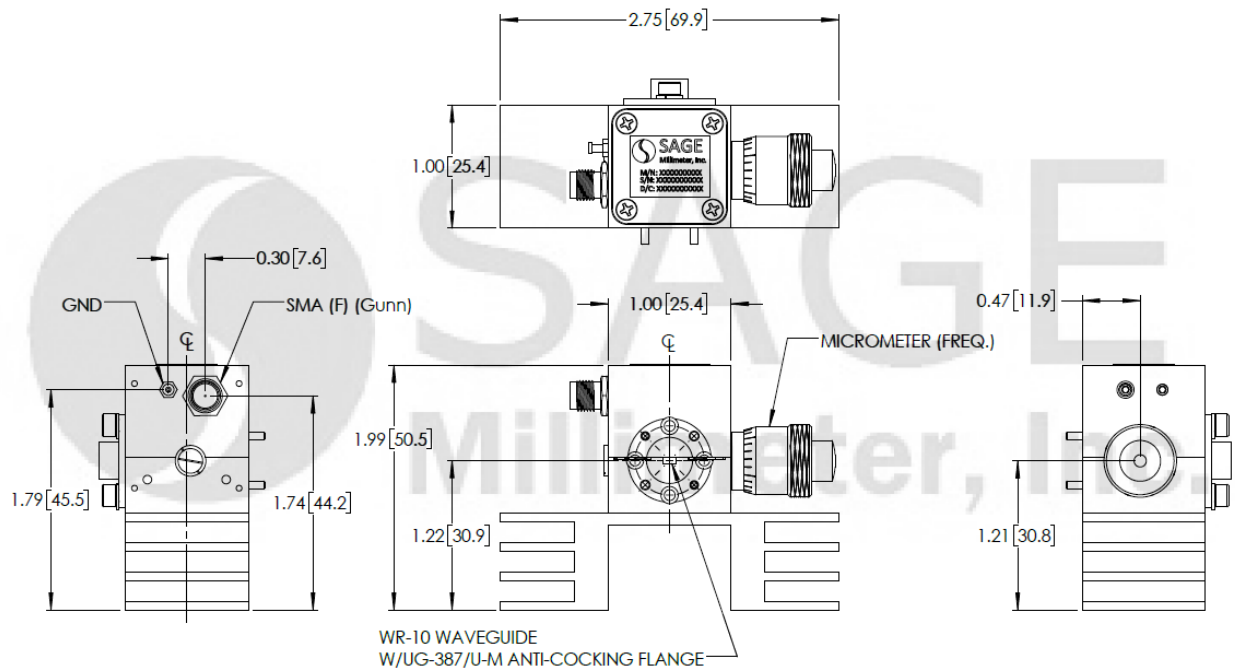

www.sagemillimeter.com | 3043 Kashiwa Street, Torrance, CA 90505
Phone: 424-757-0168 | Fax: 424-757-0188 | Email: sales@sagemillimeter.com



W-Band Mechanically Tuned Gunn Oscillator, 2 GHz Tuning Bandwidth

Note:

- All data is presented using a limited sample lot, actual data may vary unit to unit.
- The data given above was tested under case temperature **+35 °C**.
- Always set micrometer reading to approximately **90.0 GHz** when turning on the oscillator to avoid wrong mode operation.
- The SAGE Millimeter Gunn oscillator regulator **SOR-R3** is highly recommended for over voltage and reverse bias protection. The outline of the model SOR-R3 is shown in below.
- The bias tuning feature can be used for electrical tuning or FM modulation and phase lock loop applications.
- AM modulation can be achieved by turn on/off the oscillator via bias port with the modulation rate up to 1 kHz.
- SAGE Millimeter, Inc. reserves the right to change the information presented without notice.

Caution:

- Reversing polarity will destroy the device.
- Bias voltage should never exceed **+5.0 Volts**.
- The case temperature of the device should never exceed **+50 °C**. Use an additional heatsink or fan if necessary.
- Proper torque, 8.0 ± 0.15 inch-pounds (0.92 ± 0.05 Nm), should be applied. **SAGE Millimeter torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will destroy the device.

Appendix: The Outline of the Gunn Oscillator Regulator Model SOR-R3

