


LB-110265-20-C-SFSP0 Multi Octave Horn Antenna 11-26.5GHz 20dB Gain SMA Female

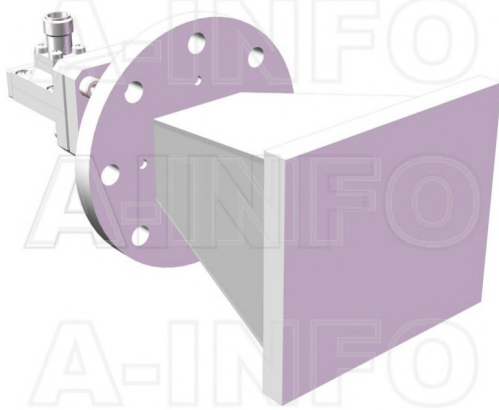

Multi Octave Horn Antenna Operating From 11GHz to 26.5GHz With a Nominal 20dB Gain With SMA Female Connector

Product Information

SKU	LB-110265-20-C-SFSP0
-----	----------------------

Description

Multi octave horn antenna LB-110265-20-C-SFSP0, operating from 11 to 26.5GHz with a nominal 20dB gain and low VSWR 1.5:1 with SMA Female output connector. The model LB-110265-20-C-SFSP0 has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 50W continuously and 1000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This multi octave horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification


Electrical Specification		Interface	
Frequency, Min (GHz)	11	Output Type	Coaxial
Frequency, Max (GHz)	26.5	Connector	SMA
Waveguide Type	Double Ridge	Connector Gender	Female
Waveguide Size EIA WRD	WRD110	Mechanical Specification	
Gain, Typ (dBi)	20	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Min (Deg.)	9	Finish	Gold Plated and Chemical Conversion Coating, Gray Paint
3dB Beamwidth, E-Plane, Max (Deg.)	23	Size, W (mm)	81
3dB Beamwidth, H-Plane, Min (Deg.)	10	Size, H (mm)	70
3dB Beamwidth, H-Plane, Max (Deg.)	26	Size, L (mm)	166
Cross Pol. Isolation, Typ (dB)	40	Weight, (kg)	0.29
VSWR, Typ	1.5:1		
Impedance, (Ohm)	50		
Power Handling, CW, (W)	50		
Power Handling, Peak, (W)	1000		

Additional Information


Application	Outdoor, Waterproof and Dustproof, Fixed	Solution for	Gain Reference Antenna Measurement Far-field Measurement System Intergration
-------------	--	--------------	---

Typical Test Results

Gain

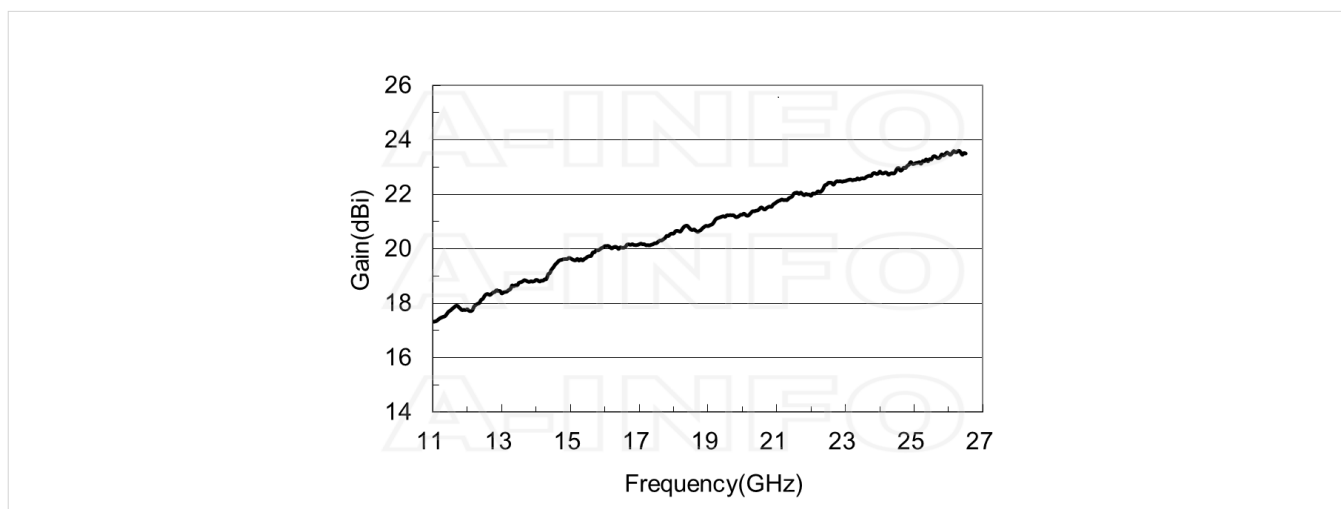


Antenna Factor

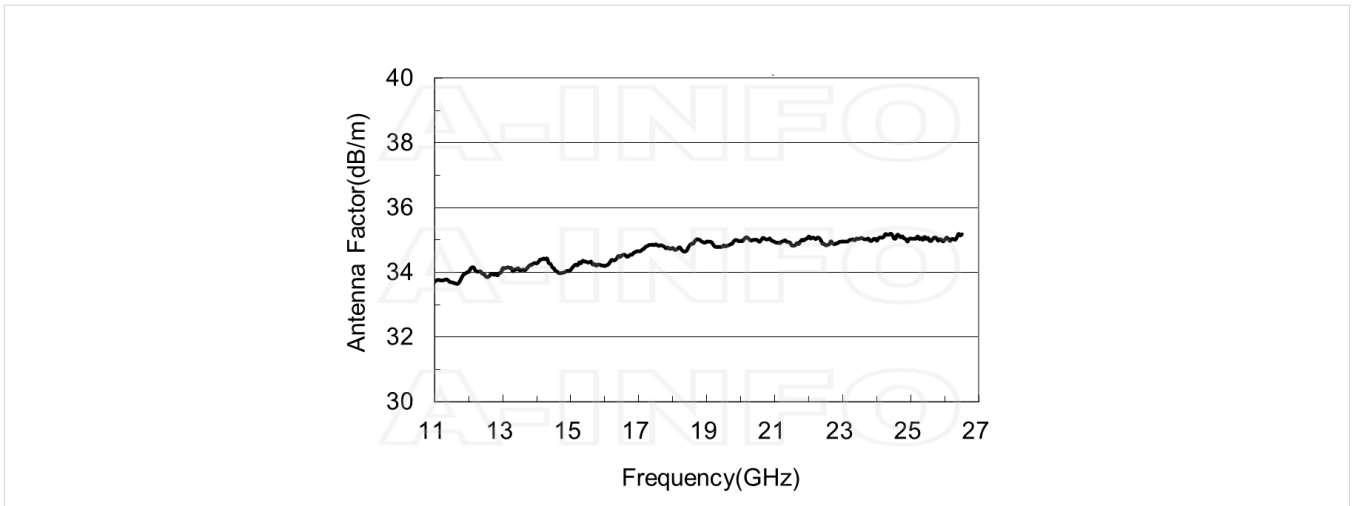


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	AF(dB/m)
11.0	17.32	33.72
12.0	17.78	34.01
13.0	18.36	34.13
14.0	18.86	34.27
15.0	19.65	34.08
16.0	20.10	34.19
17.0	20.17	34.65
18.0	20.56	34.76
19.0	20.83	34.96
20.0	21.25	34.98
21.0	21.72	34.93
22.0	21.95	35.11
23.0	22.49	34.96
24.0	22.84	34.98
25.0	23.12	35.05
26.0	23.50	35.01
26.5	23.50	35.18


Cross Polarization Isolation

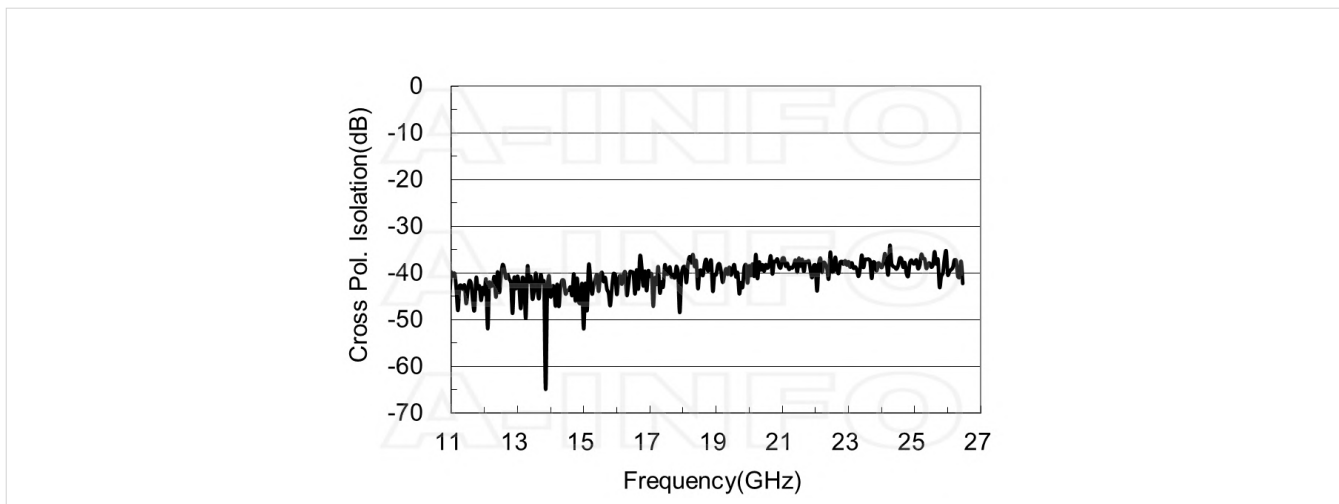


VSWR

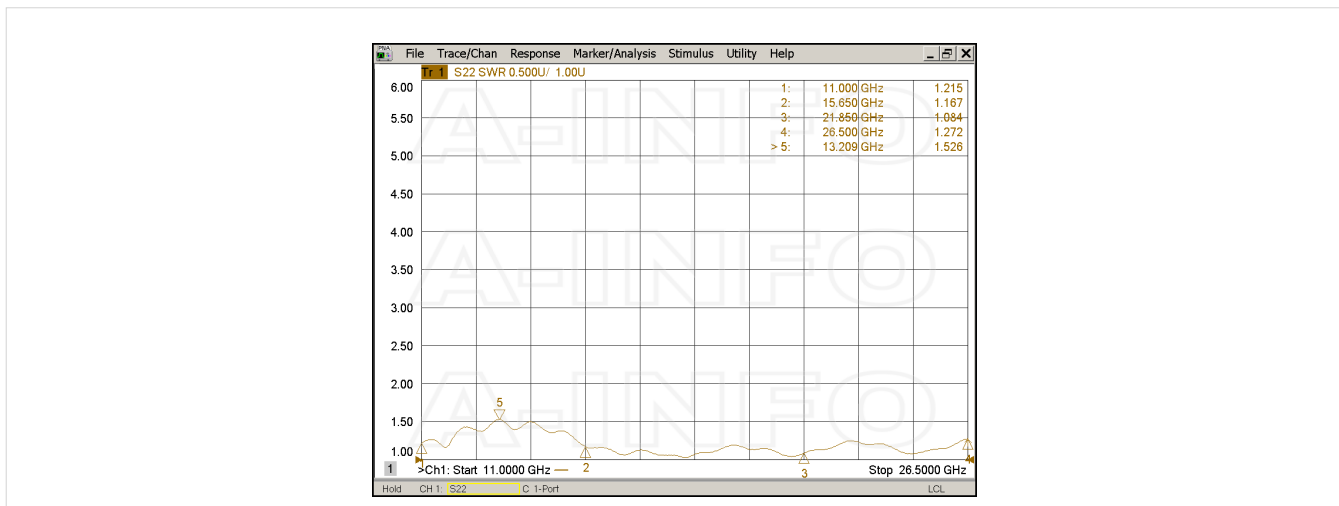


Pattern

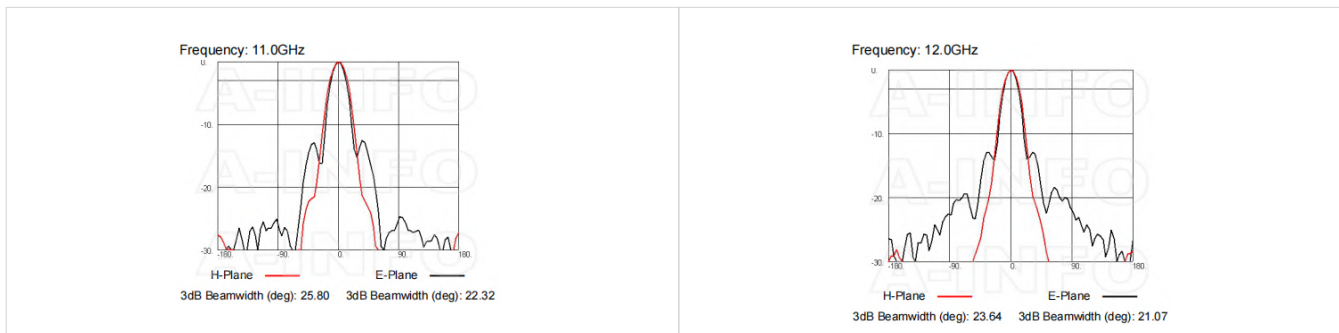


Frequency: 13.0GHz




Frequency: 14.0GHz




Frequency: 15.0GHz




Frequency: 16.0GHz




Frequency: 17.0GHz




Frequency: 18.0GHz




Frequency: 19.0GHz




Frequency: 20.0GHz




Frequency: 21.0GHz

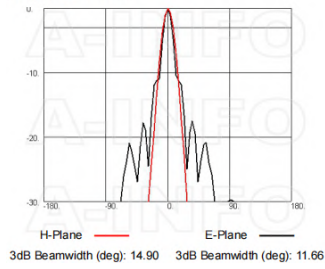


Frequency: 22.0GHz




Frequency: 23.0GHz




Frequency: 24.0GHz




Frequency: 25.0GHz



Frequency: 26.0GHz



Frequency: 26.5GHz



Related Products



Carrying Case_LB-110265-20-C AI Alloy Carrying Case



SM-SM-A050-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A050-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1000 Flexible Cable Assembly 1000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-1500 Flexible Cable Assembly 1500mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-2000 Flexible Cable Assembly 2000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-3000 Flexible Cable Assembly 3000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-5000 Flexible Cable Assembly 5000mm DC- 26.5GHz SMA Male to SMA Male



SM-SM-A080-10000 Flexible Cable Assembly 10000mm DC- 26.5GHz SMA Male to SMA Male




SM-SM-A080-20000 Flexible Cable Assembly 20000mm DC- 26.5GHz SMA Male to SMA Male

Similar Products



LB-110265-20-A Multi Octave Horn Antenna 11-26.5GHz 20dB Gain Double Ridge Waveguide Interface



LB-110265-20-ASPO Multi Octave Horn Antenna 11-26.5GHz 10dB Gain Double Ridge Waveguide Interface



LB-110265-20-C-SF Multi Octave Horn Antenna 11-26.5GHz 20dB Gain SMA Female

About this Datasheet

<ul style="list-style-type: none"> ● Product Information <p>Product Link: https://www.ainfoinc.com/lb-110265-20-c-sfsp0-multi-octave-horn-antenna-11-26-5-ghz-20db-gain-sma-female Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved</p>	<ul style="list-style-type: none"> ● Contact Us <p>Address: 60 Tesla, Irvine, CA 92618, USA</p> <p>Website: www.ainfoinc.com</p> <p>Email: sales@ainfoinc.com</p>	<ul style="list-style-type: none"> ● Phone & Fax <p>Phone: +1-949-639-9688 +1-949-639-9608</p> <p>Fax: +1-949-639-9670</p>
---	--	---