

LB-180400-15-C-KF_AI Multi Octave Horn Antenna 18-40GHz 15dB Gain
2.92mm Female



Multi Octave Horn Antenna Operating From 18GHz to 40GHz With a Nominal 15dB Gain With 2.92mm Female Connector

Product Information

SKU	LB-180400-15-C-KF_AI
-----	----------------------

Description

Multi octave horn antenna LB-180400-15-C-KF_AI, operating from 18 to 40GHz with a nominal 15dB gain and low VSWR 1.5:1 with 2.92mm Female output connector. The model LB-180400-15-C-KF_AI has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 20W continuously and 40W peak power. Constructed of lightweight corrosion-resistant aluminum, the antenna will provide years of trouble-free indoor and outdoor service. This multi octave horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification

Electrical Specification		Interface	
Frequency, Min (GHz)	18	Output Type	Coaxial
Frequency, Max (GHz)	40	Connector	2.92mm(K)
Waveguide Type	Double Ridge	Connector Gender	Female
Waveguide Size EIA WRD	WRD180	Mechanical Specification	
Gain, Typ (dBi)	15	Figure	C Type
Polarization	Linear	Body Material	Al
3dB Beamwidth, E-Plane, Min (Deg.)	20	Finish	Gold Plated and Chemical Conversion Coating, Gray Paint
3dB Beamwidth, E-Plane, Max (Deg.)	45	Size, W (mm)	32
3dB Beamwidth, H-Plane, Min (Deg.)	16	Size, H (mm)	28.6
3dB Beamwidth, H-Plane, Max (Deg.)	51	Size, L (mm)	71
Cross Pol. Isolation, Typ (dB)	35	Weight, (kg)	0.07
VSWR, Typ	1.5:1		
Impedance, (Ohm)	50		
Power Handling, CW, (W)	20		
Power Handling, Peak, (W)	40		

Additional Information

Application	General Purpose Indoor & Outdoor, Fixed	Solution for	Gain Reference Antenna Measurement Far-field Measurement System Intergration
-------------	---	--------------	---

Outline Drawing

2.92mm-Female Output (P/N: LB-180400-15-C-KF_AI)



2.92mm-Female Output with Round Mounting Bracket (Option, P/N: LB-180400-10-C-MB)




2.92mm-Female Output with L Type Mounting Bracket (Option, P/N: LB-180400-10-C-MBL)




Typical Test Results

Gain

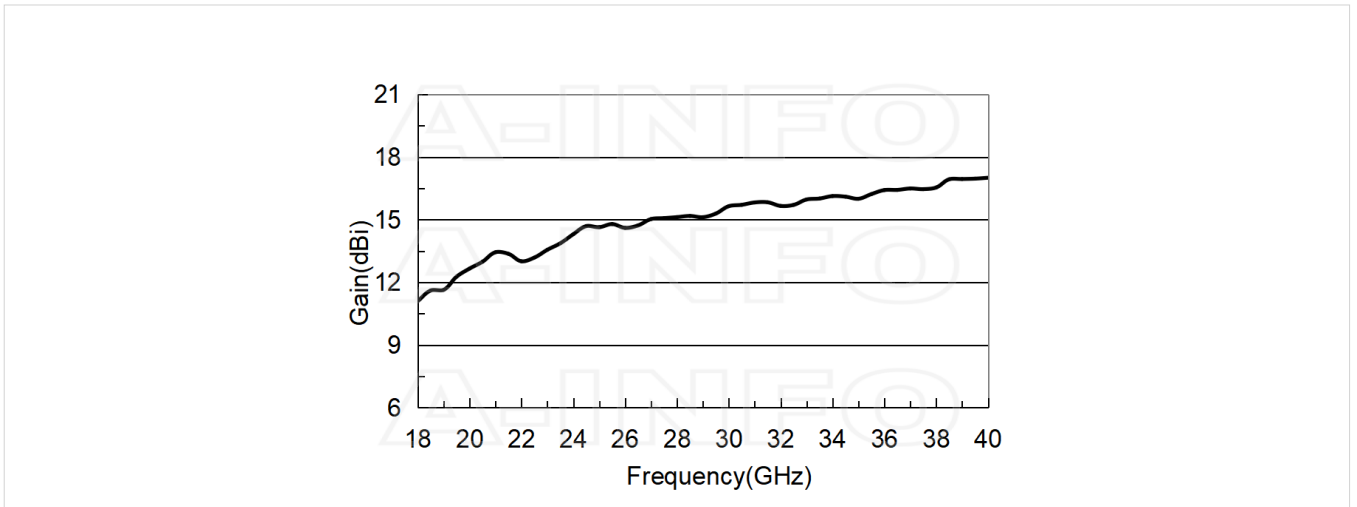


Antenna Factor

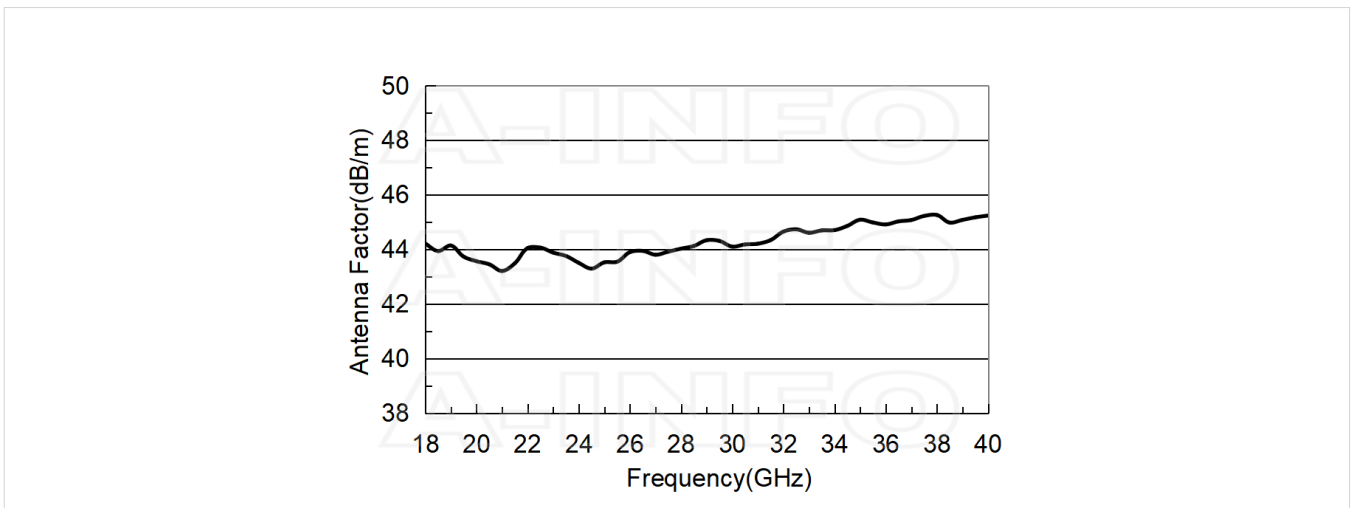


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	Antenna Factor(dB/m)
18.0	11.10	44.22
20.0	12.66	43.57
22.0	13.01	44.05
24.0	14.31	43.51
26.0	14.61	43.90
28.0	15.12	44.03
30.0	15.65	44.10
32.0	15.66	44.65
34.0	16.13	44.71
36.0	16.42	44.92
38.0	16.54	45.26
40.0	17.01	45.24


Cross Polarization Isolation

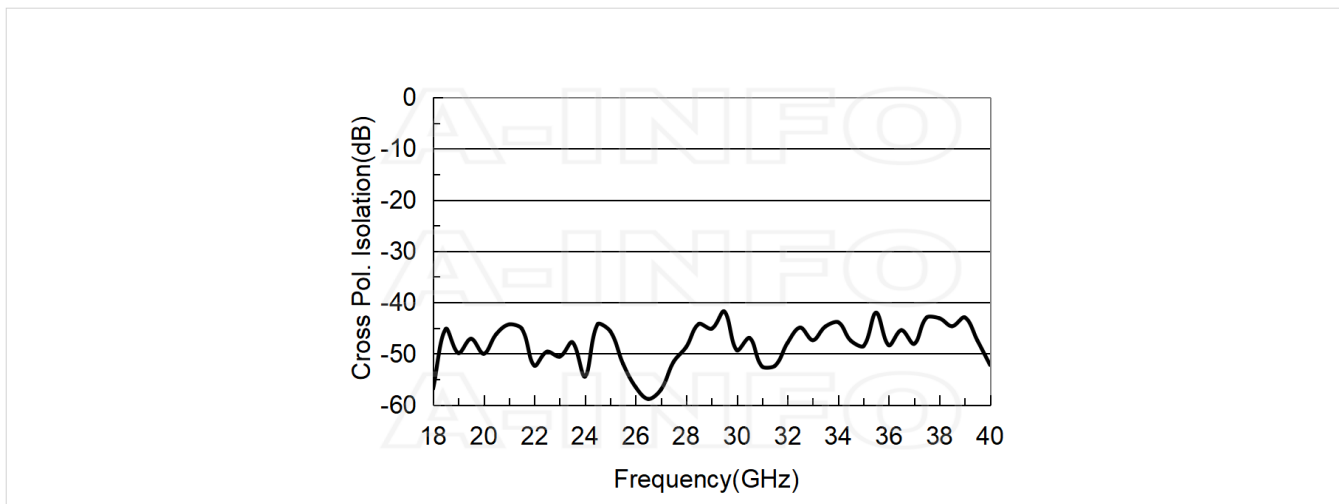


VSWR






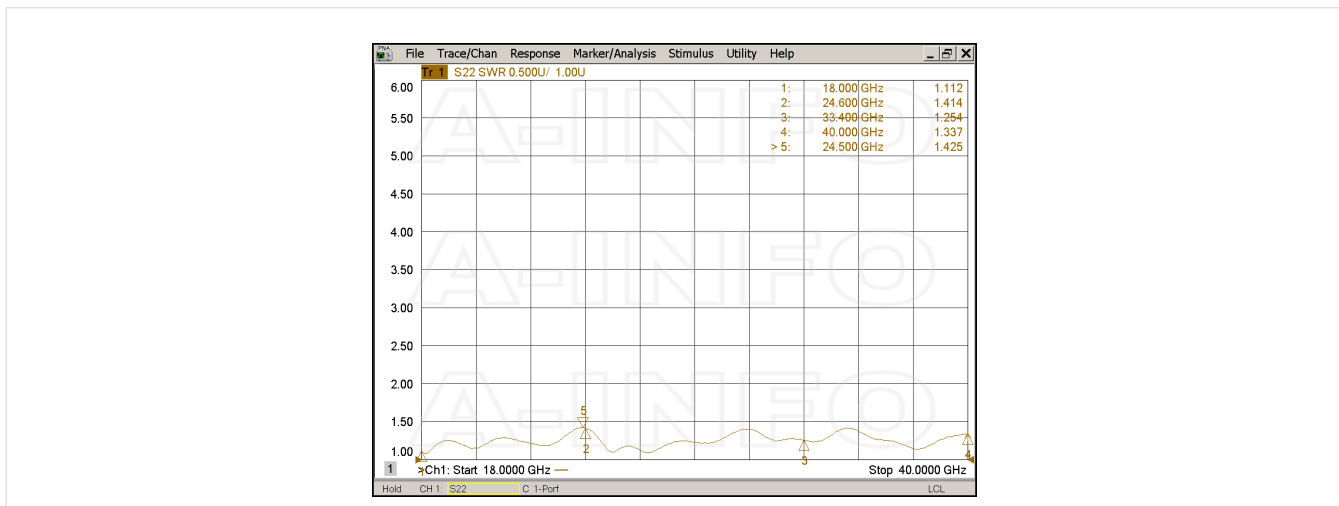


Beamwidth

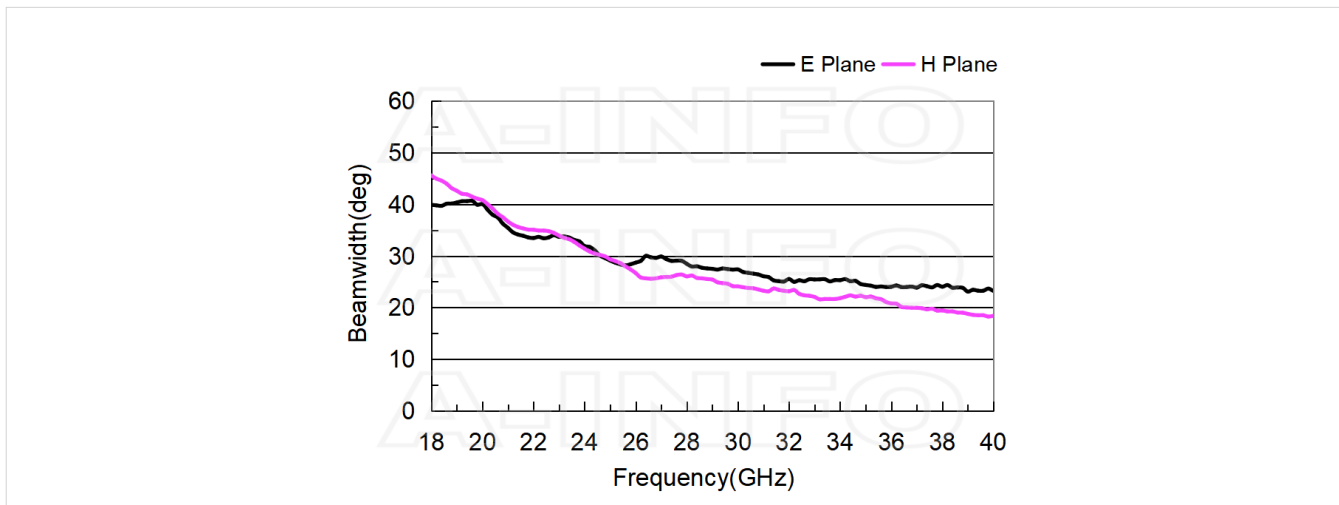

Pattern

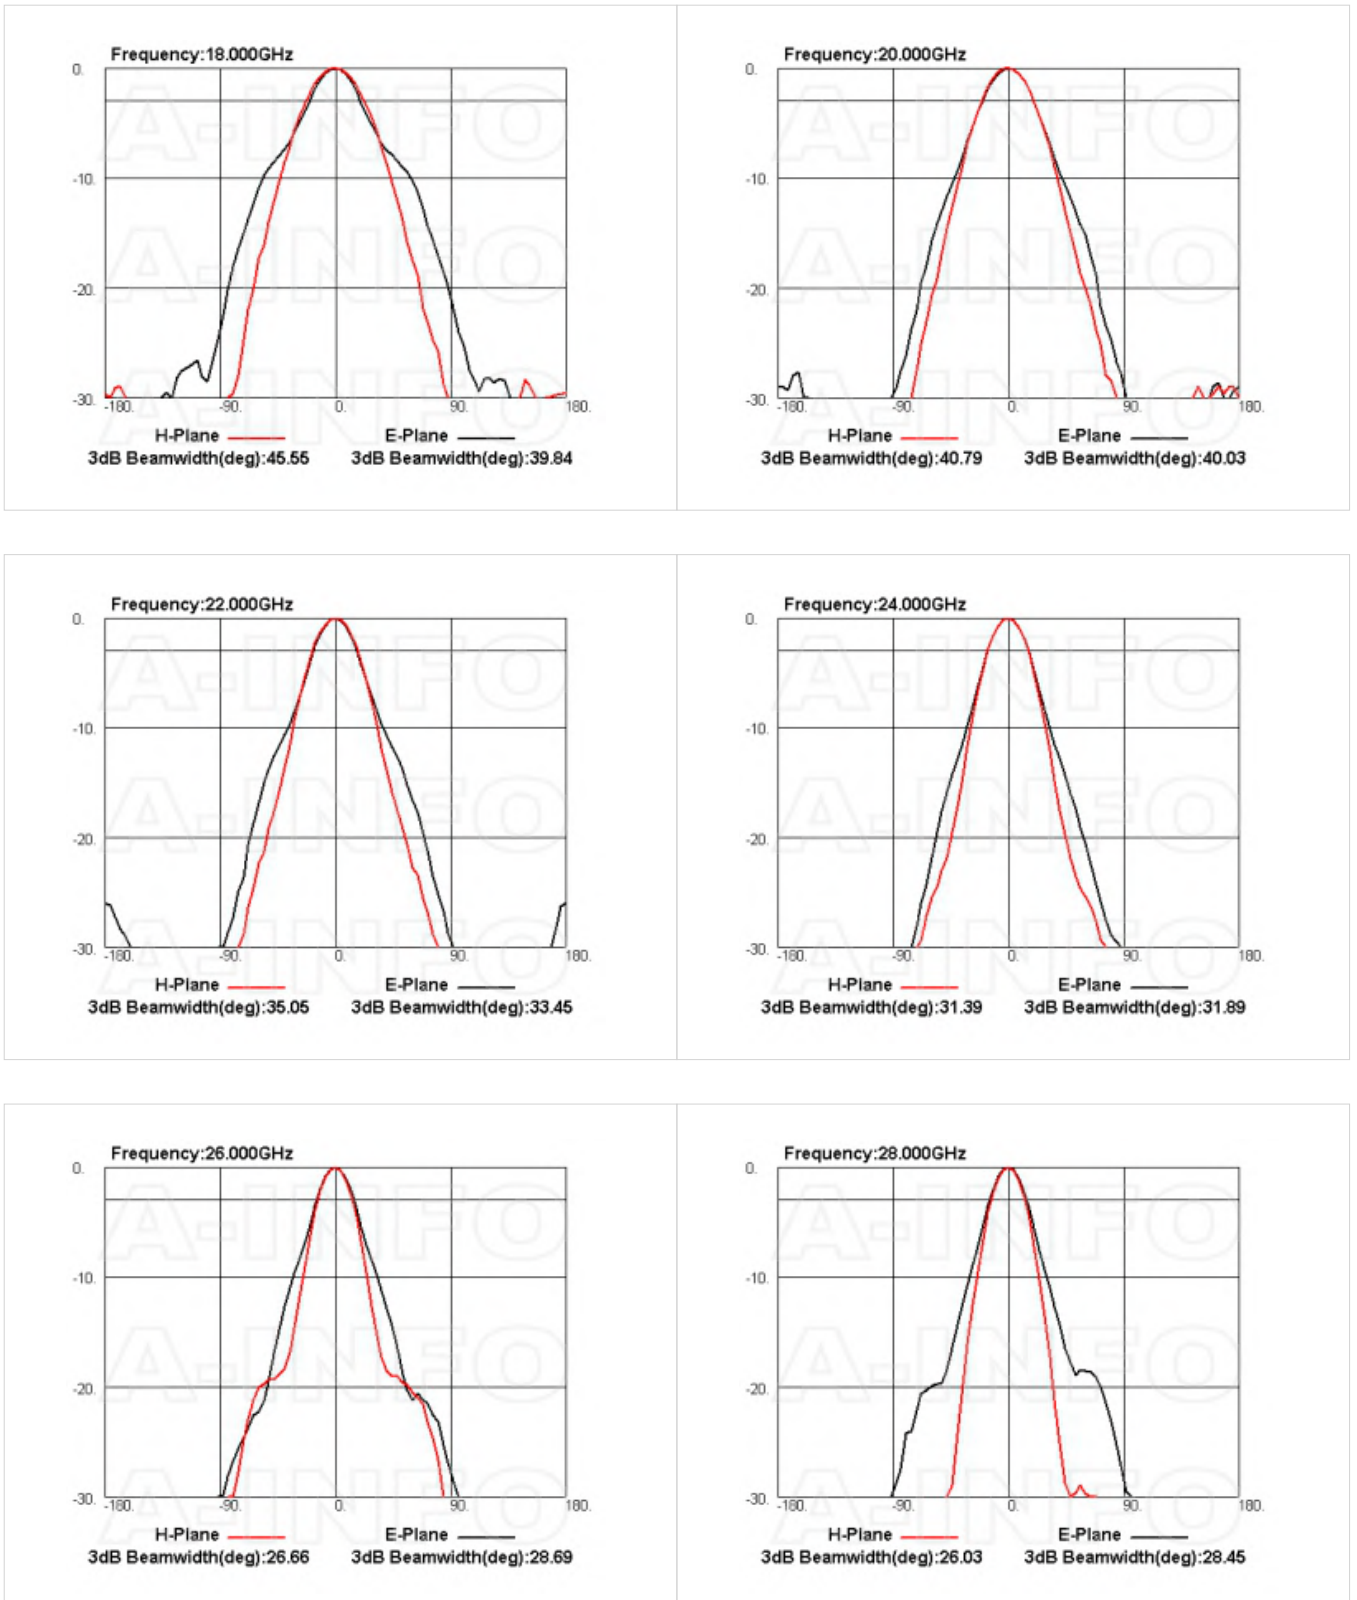

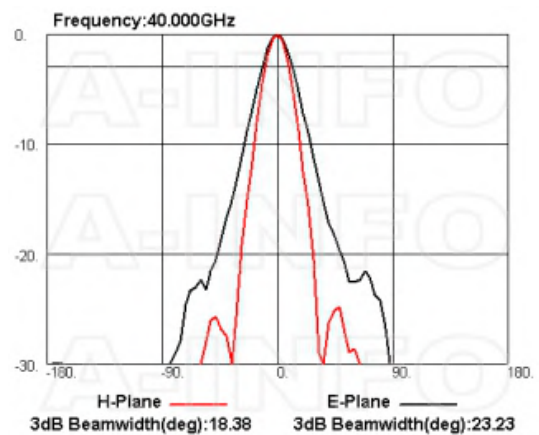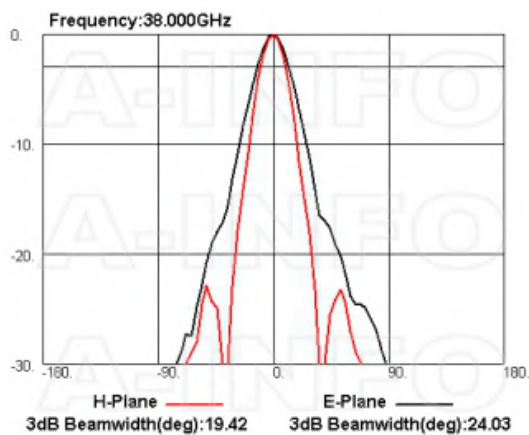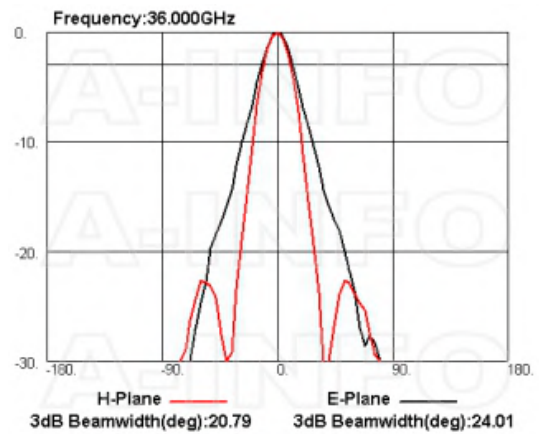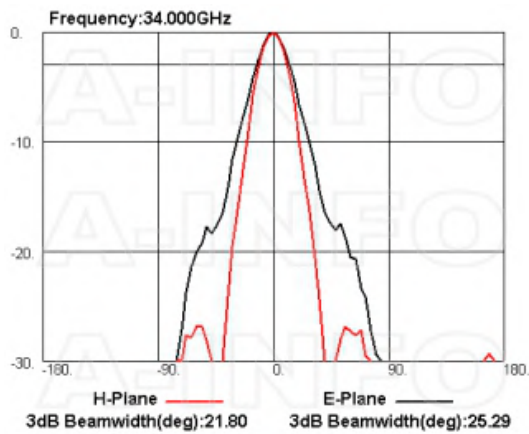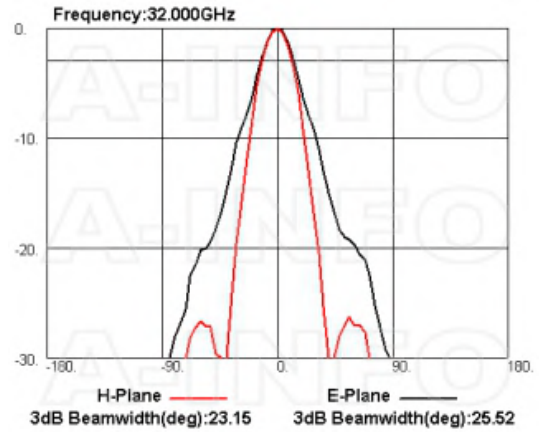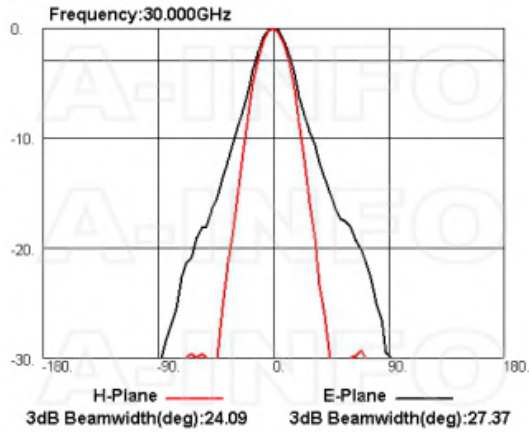

Related Products



LB-180400-10-C-MB Round Type Mounting Bracket



LB-180400-10-C-MBL L Type Mounting Bracket



Tripod_15Kg AI Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



Carrying Case_LB-180400-15 AI Alloy Carrying Case



2.92M-2.92M-A050-500 Flexible Cable Assembly 500mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-1000 Flexible Cable Assembly 1000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-1500 Flexible Cable Assembly 1500mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-2000 Flexible Cable Assembly 2000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-3000 Flexible Cable Assembly 3000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-5000 Flexible Cable Assembly 5000mm DC-40GHz 2.92mm Male to 2.92mm Male



2.92M-2.92M-A050-10000 Flexible Cable Assembly 10000mm DC-40GHz 2.92mm Male to 2.92mm Male

Similar Products



LB-180400-15-A_AI Multi Octave Horn Antenna 18-40GHz 15dB Gain Double Ridge Waveguide Interface



LB-180400-15-C-2.4F_AI Multi Octave Horn Antenna 18-40GHz 15dB Gain 2.4mm Female

About this Datasheet

<ul style="list-style-type: none"> ● Product Information Product Link: https://www.ainfoinc.com/lb-180400-15-c-kf-ai-multi-octave-horn-antenna-18-40-ghz-15db-gain-2-92mm-female Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved 	<ul style="list-style-type: none"> ● Contact Us Address: 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com 	<ul style="list-style-type: none"> ● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---