


LB-60180-25-C-NFSPO Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain N Type Female

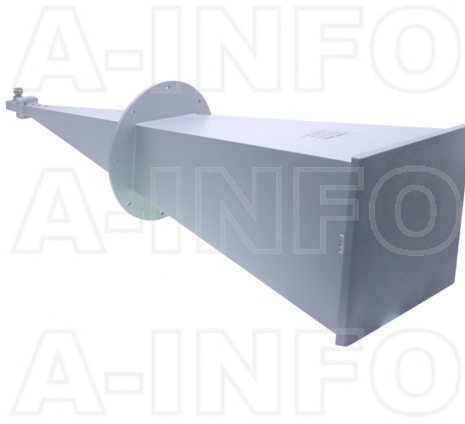

Multi Octave Horn Antenna Operating From 6.0GHz to 18GHz With a Nominal 25dB Gain With N Type Female Connector

Product Information

SKU	LB-60180-25-C-NFSPO
-----	---------------------

Description

Multi octave horn antenna LB-60180-25-C-NFSPO, operating from 6.0 to 18.0GHz with a nominal 25dB gain and low VSWR 1.5:1 with N Type Female output connector. The model LB-60180-25-C-NFSPO has uniform gain through its frequency span, providing efficient performance characteristics and directionality. It can handle 150W continuously and 3000W peak power. Constructed of lightweight corrosion-resistant aluminum, the horn comes with a specially designed weatherproof radome which provides excellent protection against the rain and dust but has very little loss across the full operating frequency band. This multi octave horn antenna is linearly polarized and ideally suited for EMI testing, direction finding, surveillance, antenna gain and pattern measurements and other applications.

Technical Specification

Electrical Specification	
Frequency, Min (GHz)	6
Frequency, Max (GHz)	18
Waveguide Type	Double Ridge
Waveguide Size EIA WRD	WRD650
Gain, Typ (dBi)	25
Polarization	Linear
3dB Beamwidth, E-Plane, Min (Deg.)	5
3dB Beamwidth, E-Plane, Max (Deg.)	14
3dB Beamwidth, H-Plane, Min (Deg.)	6
3dB Beamwidth, H-Plane, Max (Deg.)	15
Cross Pol. Isolation, Typ (dB)	30
VSWR, Typ	1.5:1
Impedance, (Ohm)	50
Power Handling, CW, (W)	150
Power Handling, Peak, (W)	3000

Interface	
Output Type	Coaxial
Connector	N Type
Connector Gender	Female
Mechanical Specification	
Figure	C Type
Body Material	Al
Size, W (mm)	241
Size, H (mm)	200
Size, L (mm)	752


Additional Information

Application	Outdoor, Waterproof and Dustproof, Fixed
-------------	--


Solution for	Gain Reference Antenna Measurement Far-field Measurement System Intergration
--------------	---

Outline Drawing


N-Female Output with Radome (Option, P/N: LB-60180-25-C-NFSPO, Application Outdoor)

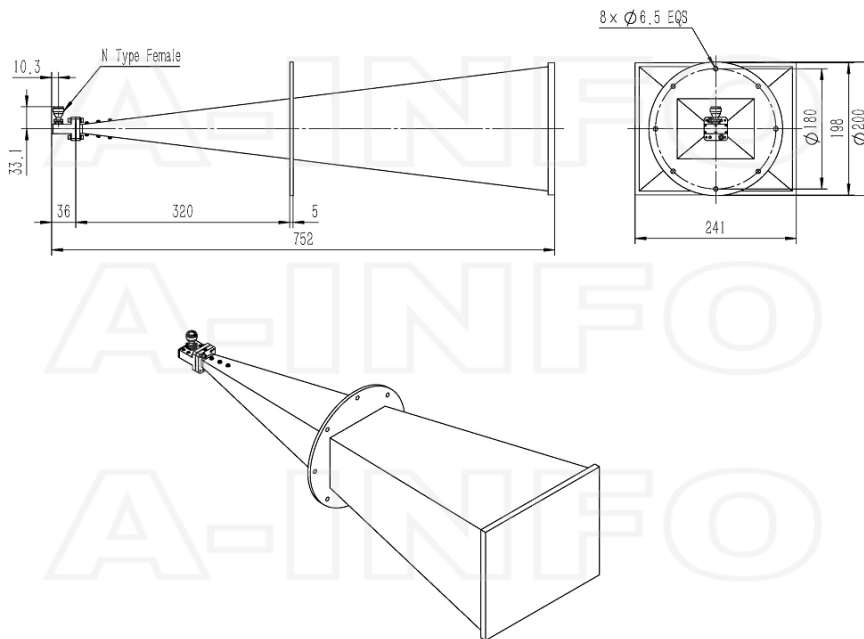

N-Female Output with Round Mounting Bracket & Radome (Option, P/N: LB-90-25-MB2 & LB-60180-25-C-NFSPO, Application Outdoor)

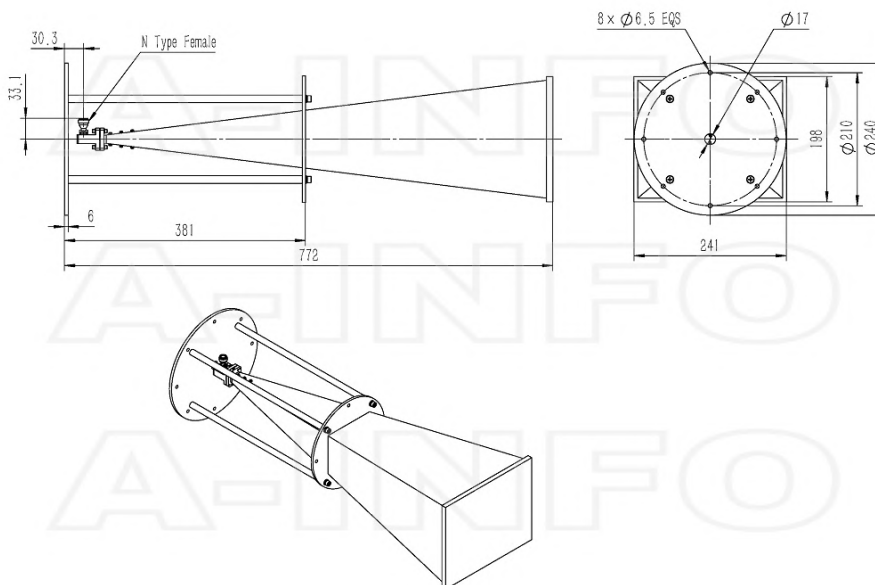


N-Female Output with L Type Mounting Bracket & Radome (Option, P/N: LB-90-25-L2 & LB- 60180-25-C-NFSPO, Application Outdoor)

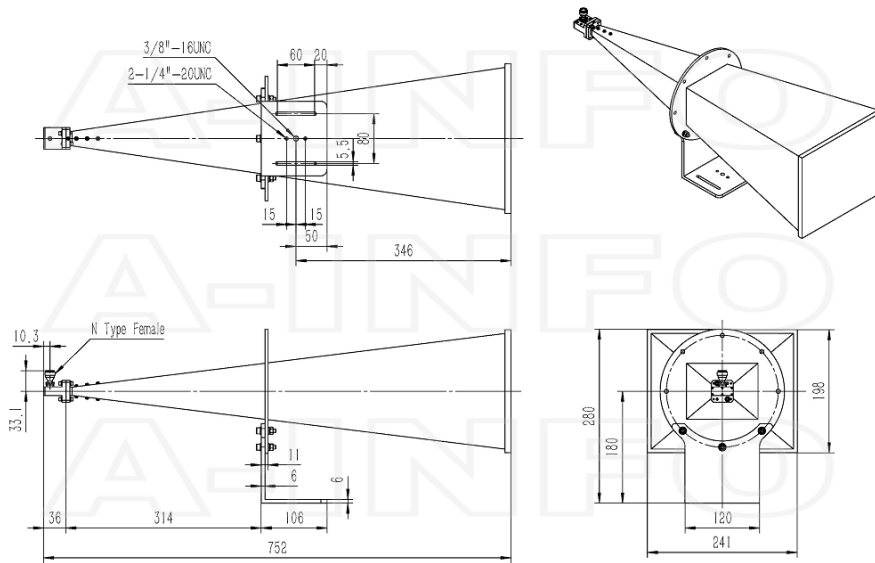


Typical Test Results

Gain

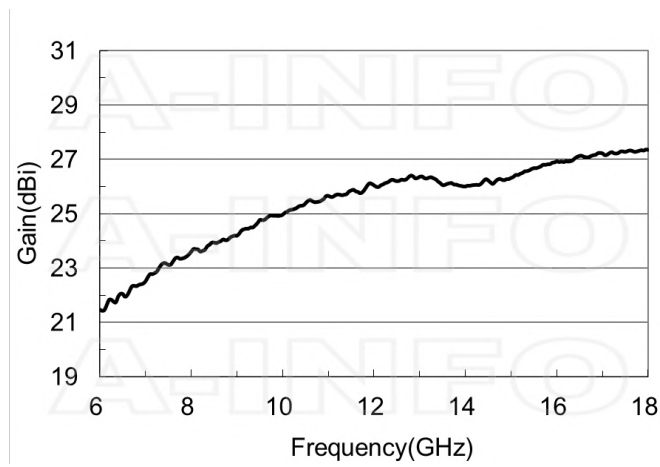


Antenna Factor

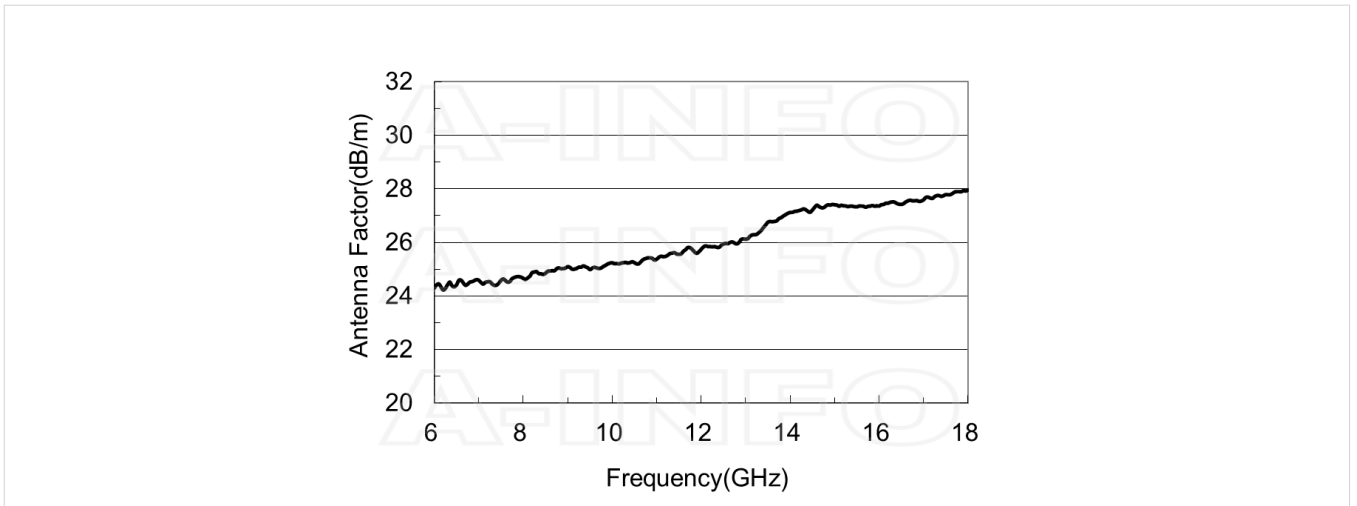


Antenna Factor (Table)

Frequency(GHz)	Gain(dBi)	AF(dB/m)
6.0	21.47	24.30
7.0	22.52	24.59
8.0	23.61	24.66
9.0	24.20	25.10
10.0	24.97	25.24
11.0	25.66	25.38
12.0	26.05	25.75
13.0	26.36	26.13
14.0	26.01	27.12
15.0	26.32	27.41
16.0	26.93	27.36
17.0	27.22	27.59
18.0	27.35	27.96


Cross Polarization Isolation

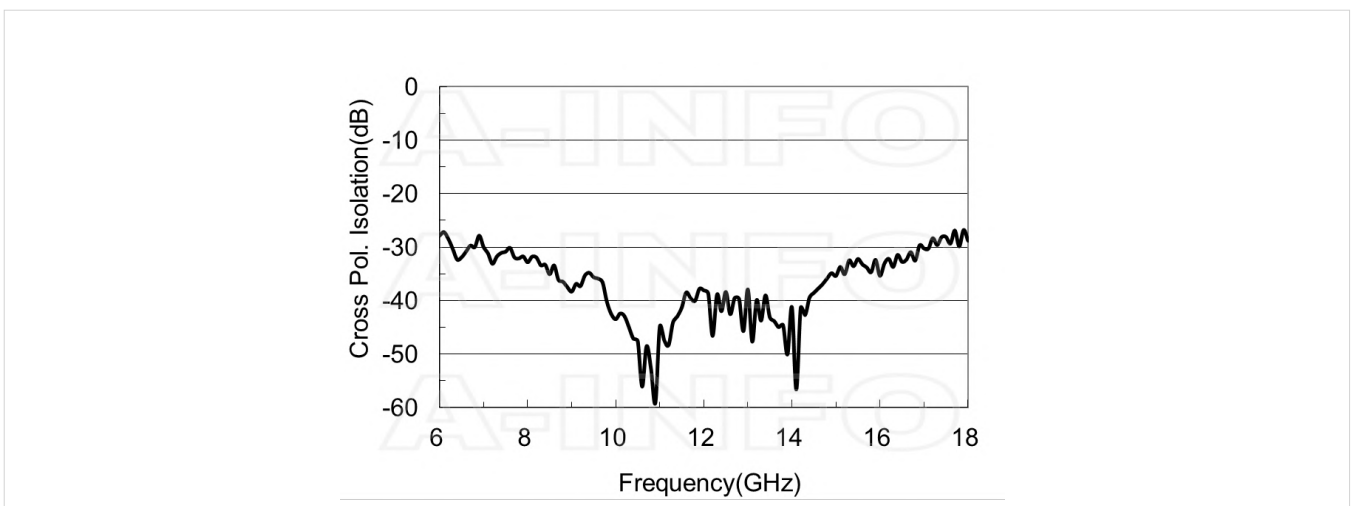


VSWR






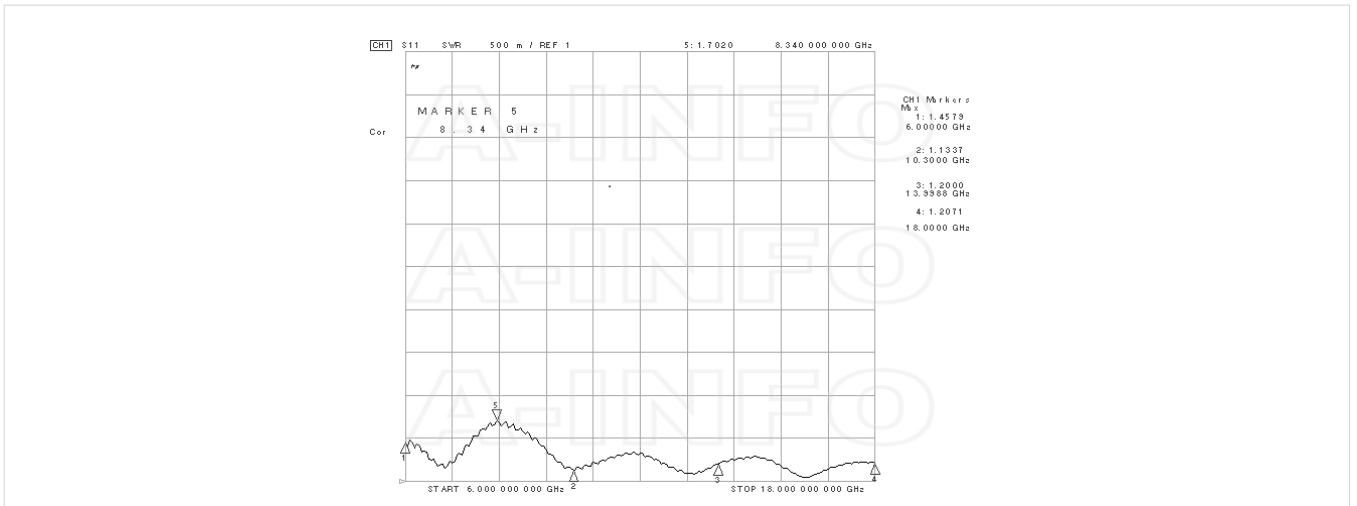







Beamwidth

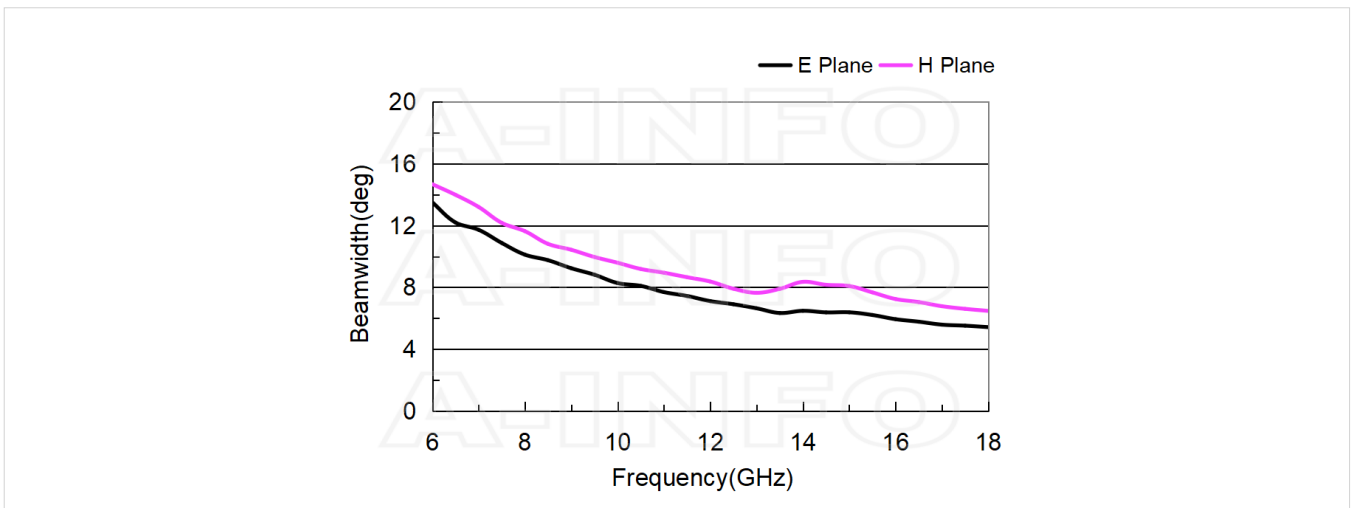

Pattern

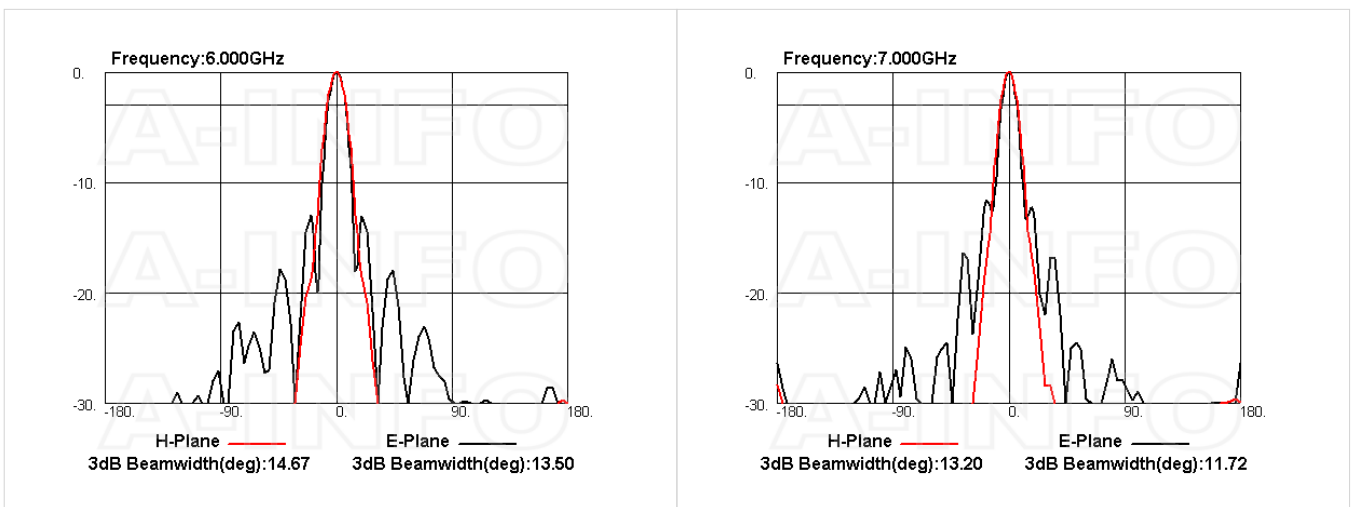

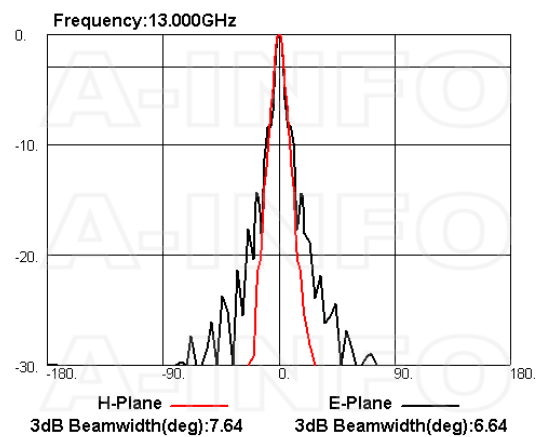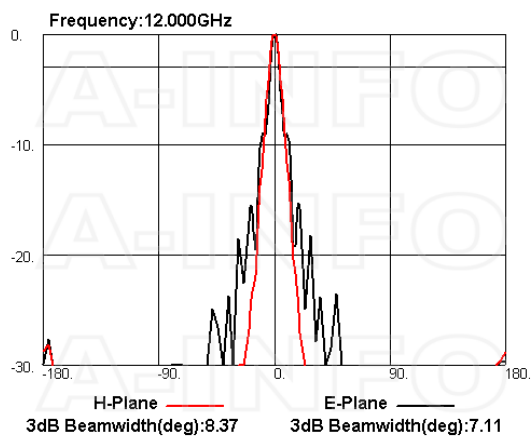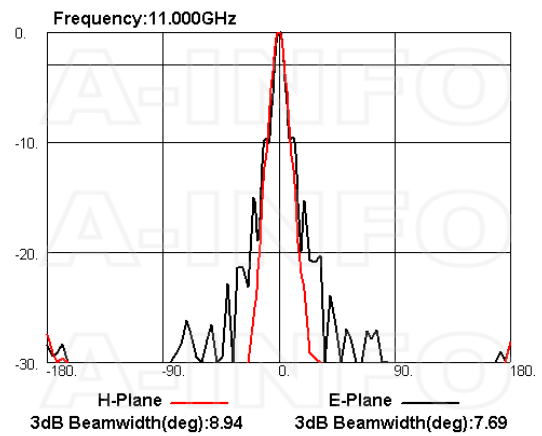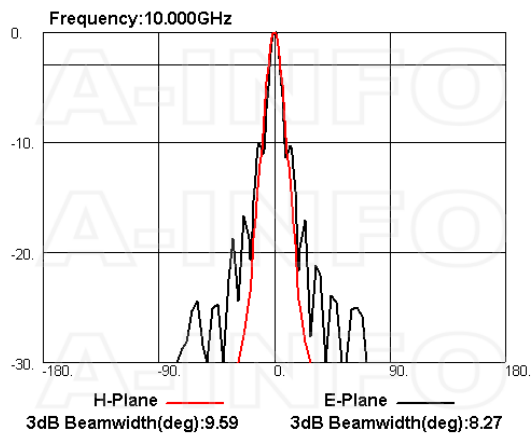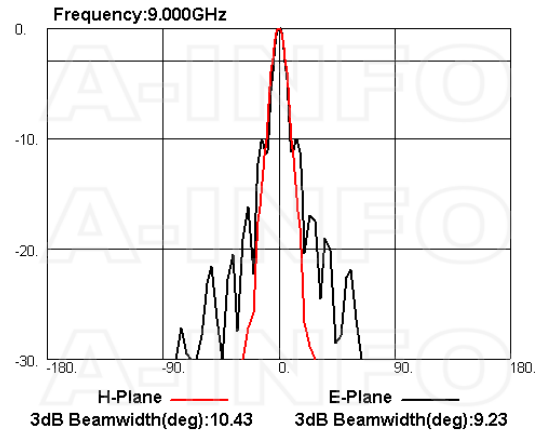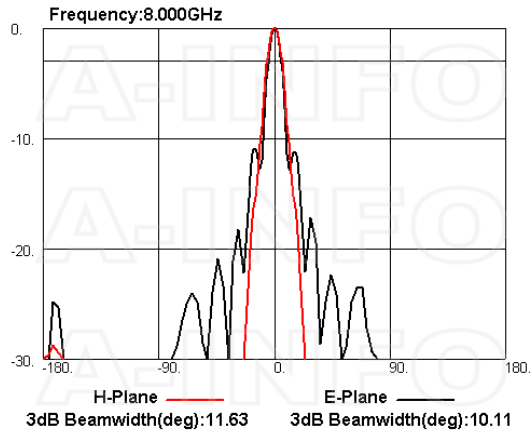

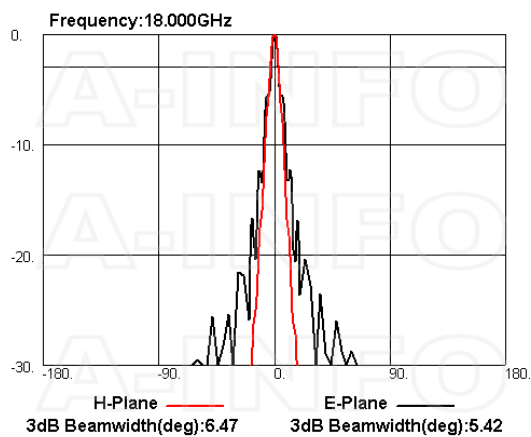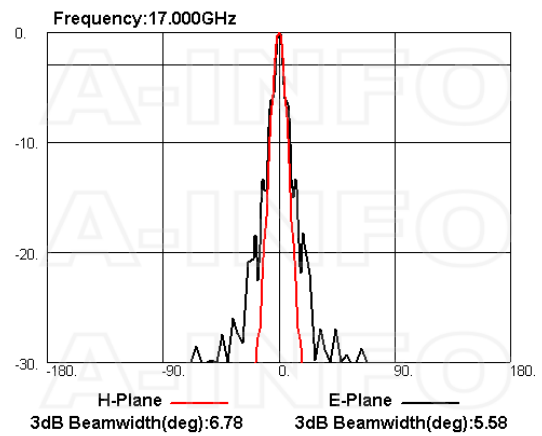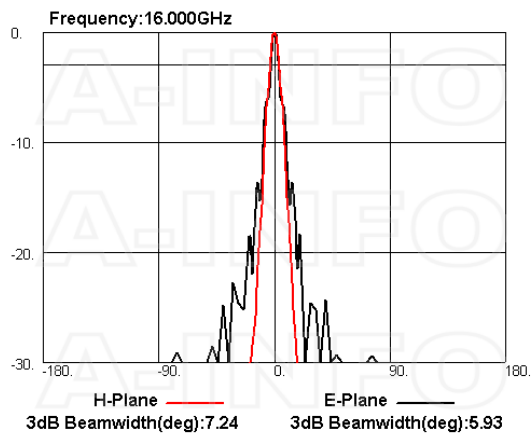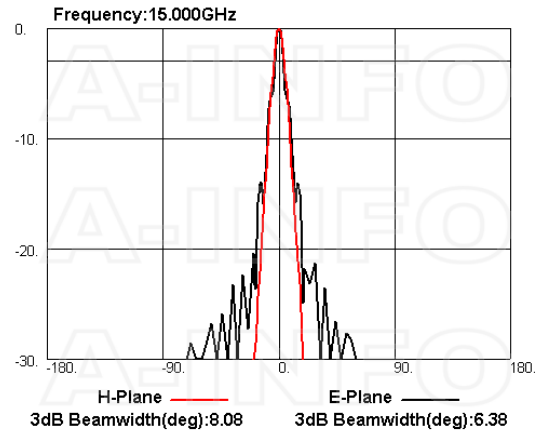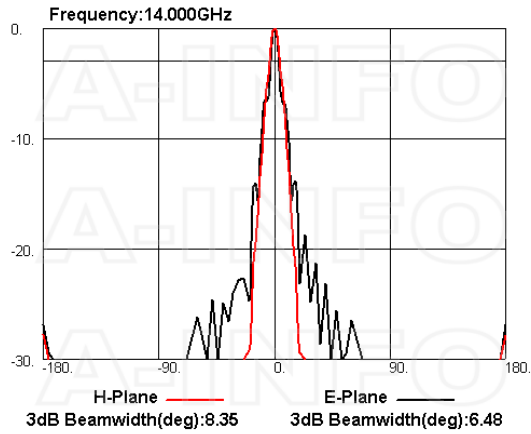

Related Products



LB-90-25-MB2 Round Type Mounting Bracket



LB-90-25-L2 L Type Mounting Bracket



Tripod_15Kg Al Alloy Tripod



3033HL Wooden Tripod



3033QM Wooden Tripod Metalfree



NM-NM-A050-1000 Flexible Cable Assembly 1000mm DC-18GHz N Male to N Male



NM-NM-A050-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A050-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A050-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A050-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A050-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male



NM-NM-A050-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male



NM-NM-A100-500 Flexible Cable Assembly 500mm DC-18GHz N Male to N Male



NM-NM-A100-1000 Flexible Cable Assembly 1000mm DC-18GHz N Male to N Male



NM-NM-A100-1500 Flexible Cable Assembly 1500mm DC-18GHz N Male to N Male



NM-NM-A100-2000 Flexible Cable Assembly 2000mm DC-18GHz N Male to N Male



NM-NM-A100-3000 Flexible Cable Assembly 3000mm DC-18GHz N Male to N Male



NM-NM-A100-5000 Flexible Cable Assembly 5000mm DC-18GHz N Male to N Male



NM-NM-A100-10000 Flexible Cable Assembly 10000mm DC-18GHz N Male to N Male



NM-NM-A100-20000 Flexible Cable Assembly 20000mm DC-18GHz N Male to N Male

Similar Products



LB-60180-25-A Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain Double Ridge Waveguide Interface



LB-60180-25-ASPO Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain Double Ridge Waveguide Interface




LB-60180-25-C-NF Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain N Type Female



LB-60180-25-C-SF Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain SMA Female



LB-60180-25-C-SFSPO Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain SMA Female



LB-60180-25-C-HNF Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain High Power N Type Female



LB-60180-25-C-HNFSPO Multi Octave Horn Antenna 6.0-18.0GHz 25dB Gain High Power N Type Female

About this Datasheet

<ul style="list-style-type: none"> ● Product Information Product Link: https://www.ainfoinc.com/lb-60180-25-c-nfsपो-multi-octave-horn-antenna-6-0-18-0-ghz-25db-gain-n-type-female Data subject to change without notice. © A-INFO INC. 2024. All Rights Reserved 	<ul style="list-style-type: none"> ● Contact Us Address: 60 Tesla, Irvine, CA 92618, USA Website: www.ainfoinc.com Email: sales@ainfoinc.com 	<ul style="list-style-type: none"> ● Phone & Fax Phone: +1-949-639-9688 +1-949-639-9608 Fax: +1-949-639-9670
---	--	---