



HI-Q[®] Compact Opto-Electronic Oscillator (Compact OEO) offers extremely low phase noise, low vibration and acceleration sensitivity.

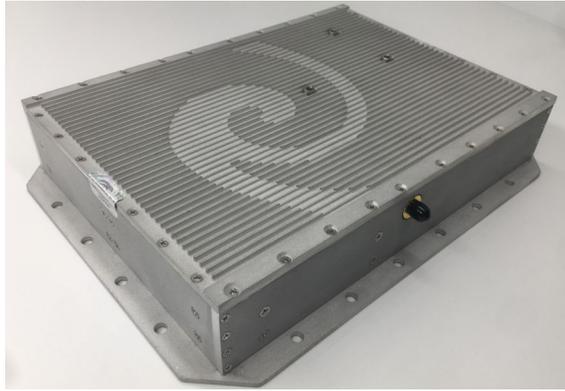

The unique design of the HI-Q[®] Compact OEO is based on the photonic generation of spectrally pure signals at RF and millimeter wave frequencies that enable OEwaves' signal sources to scale to higher frequencies with little to no penalty in phase noise performance.

The high performance of the COEO allows for clean and precise phase noise measurement, manifold enhancement of military radar system visibility, stable clocking and increased channel capacity of communications systems by an order of magnitude. Compact OEO facilitates high capacity and high frequency future wireless communication systems. This level of performance enables manufacturers to retrofit current systems as well as architect capabilities to address new markets.

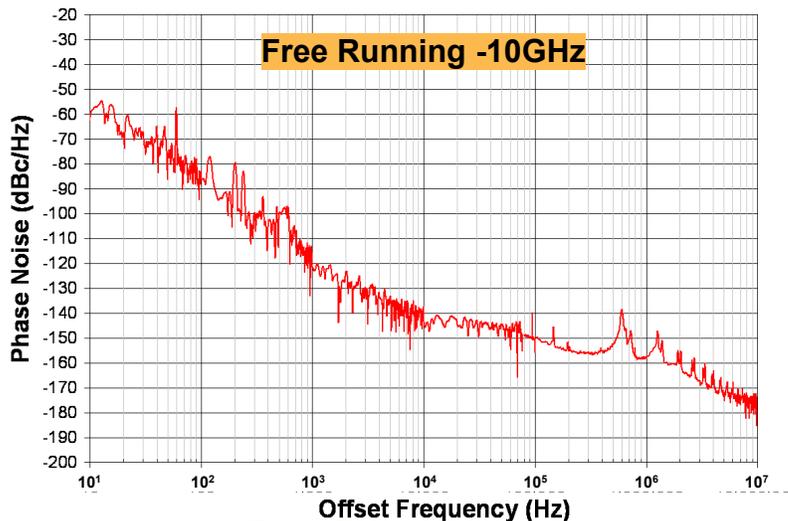

FEATURES

- Low Phase Noise/Jitter
- Low Spurious Content
- Frequency Scalability
- EMI Tolerant
- High Stability
- Low Vibration / Acceleration Sensitivity

APPLICATIONS

- Radar Systems
- Stable Clocking
- Communication
- Tele/Satellite Communication
- Wireless Networks
- Analog to Digital Conversion

HI-Q[®] Compact OEO offers phase noise performance better than -138 dBc/Hz at 10 kHz offset from the carrier

HI-Q[®] COMPACT OPTO-ELECTRONIC OSCILLATOR (COMPACT OEO)

OE3700

SPECIFICATIONS

Fixed Output Frequency	8 – 12 GHz	Consult factory for frequencies > 12 GHz
Accuracy	50 kHz	Free running
Repeatability	2 kHz	Free running
RF Output Power	+10 dBm	Consult factory for other levels
SSB Phase Noise	-45 dBc/Hz @ 10 Hz -83 dBc/Hz @ 100 Hz -115 dBc/Hz @ 1 kHz -138 dBc/Hz @ 10 kHz -140 dBc/Hz @ 100 kHz -153 dBc/Hz @ 1 MHz -168 dBc/Hz @ 10 MHz	Consult factory for higher performance
Timing Jitter – RMS	8 fs (100 Hz to 100 MHz)	Consult factory for jitter < 8 fs
Harmonics	-40 dBc	
Spurious ($f_{\text{offset}} < 100$ Hz)	-60 dBc	
Spurious (100 Hz < $f_{\text{offset}} < 1$ kHz)	-80 dBc	
Spurious ($f_{\text{offset}} > 1$ kHz)	-85 dBc	
Short Term Stability	2×10^{-10} @ 1 s	Constant case temperature
Thermal Stability	< 1 ppm/°C	
Vibration / Acceleration Sensitivity	5×10^{-11} /g	
Operating Temperature Range	15°C to 50°C	
Power Consumption	28 W	@ 25°C
Package Size	110 in ³	Consult factory for other options
Package Weight	5.5 lb	
Input / Output Connector	DC/Control: 26-Pin DB RF In (Ref): SMA (F) RF Out: SMA (F)	Consult factory for other options

OPTIONS

Optical Output - Power	-3 dBm	
PLL – Loop Bandwidth	10 – 200 Hz	
Reference Input Frequency	10 MHz or 100 MHz	Consult factory for other options

Note: These specifications are subject to change without notice due to OEwaves ongoing development cycles. This product line is covered by one or more of the following U.S. patents: 5,204,640; 5,723,856; 5,777,778; 5,929,430; 6,594,061; 6,762,869; 7,173,749. Other patents pending.



+1.626.351.4200
sales@oewaves.com
www.oewaves.com

RIDE THE WAVE OF INNOVATION

465 N. Halstead Street, Suite 140 Pasadena, CA 91107

PDS-0008_C