


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
5181	C	SEE DAR	DG	9-14
7539	D	SEE DAR	DG	3-19
9656	E	SEE DAR	TJD	4-24

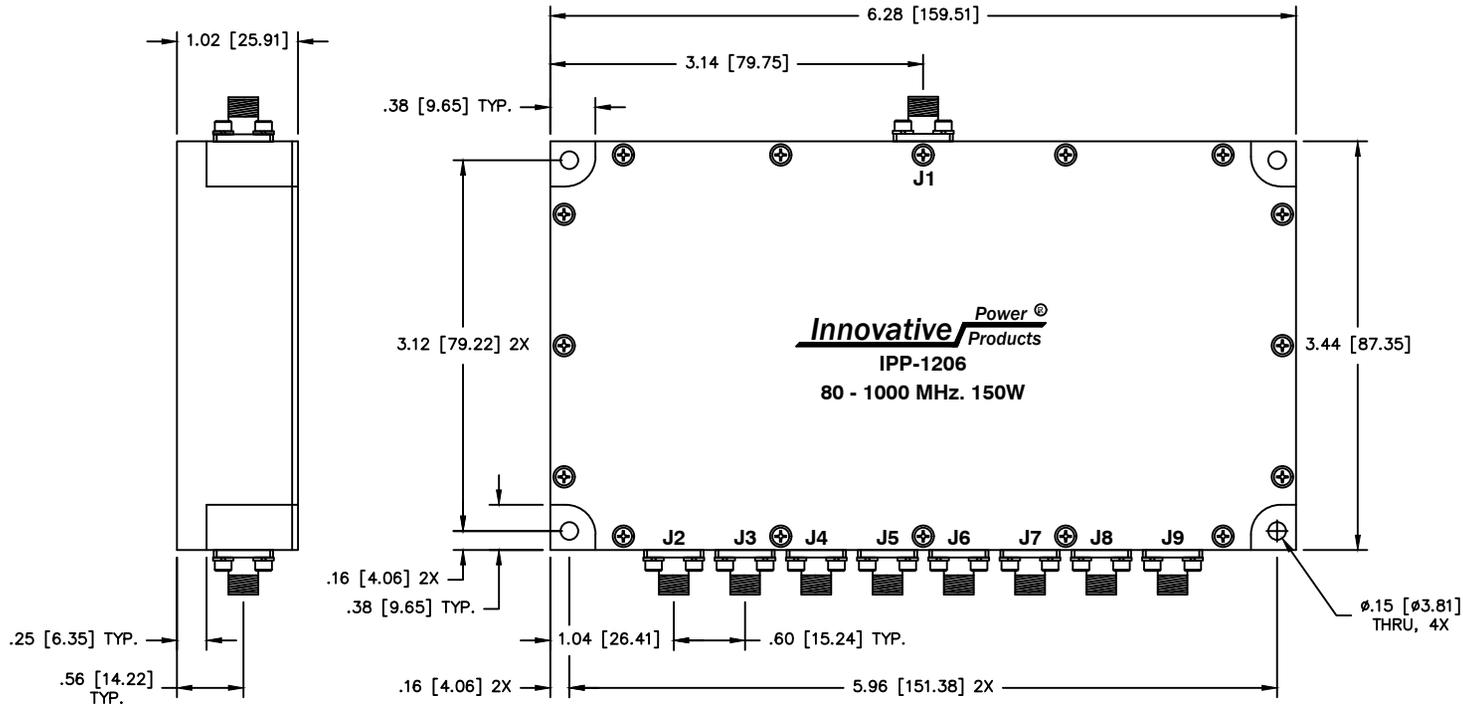

NOTES:

- CONNECTORS: J1 - J9 TYPE "SMA" FEMALE.
- RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	80 - 1000 MHz.
INSERTION LOSS:	< 1.0 dB
VSWR:	< 1.25:1
AMPLITUDE BALANCE:	±0.20 dB
PHASE BALANCE:	±5°
POWER:	150 WATT
ISOLATION:	10 dB
TEMPERATURE:	-55°C TO 85°C

MATERIAL	AL. ALLOY 6061-T651	DWN S.Cornell	DATE 8-31-12	Innovative Power® Products		
FINISH	CHEM FILM CLEAR PER MIL-DTL-5541, TYPE 2, REV F, CLASS 3 ROHS COMPLIANT	ENG DG	DATE 8-12			
TOLERANCE	.xx ±.02 [.50] .xxx ±.005 [.127] ANG. ±1/2°	MANUF	DATE	TITLE OUTLINE 8 - WAY 80 - 1000 MHz 150 WATT		
		CAGE CODE: 437R2				
		SHEET 1 OF 1	SCALE 1:1	SIZE B	P/N IPP-1206	REV. E