


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7198	A	INITIAL RELEASE	DG	6-18

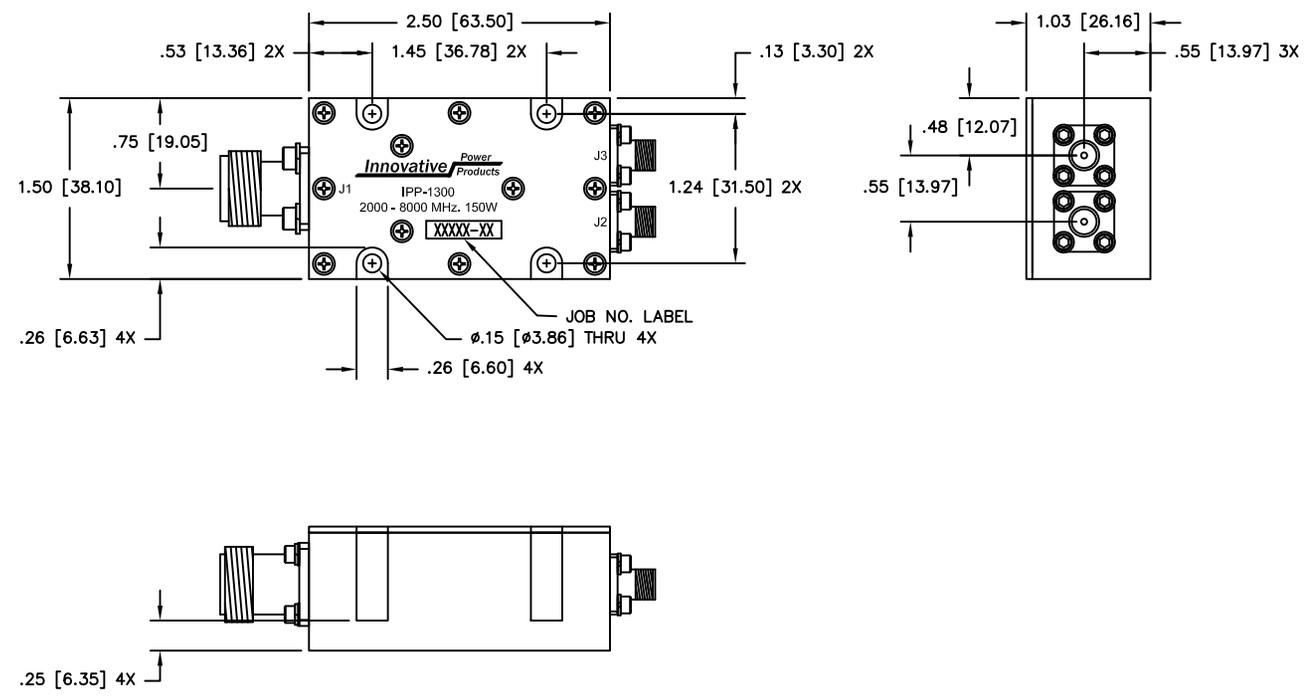

NOTES:

- CONNECTORS: J1: TYPE "N" FEMALE
J2-J3: TYPE "SMA" FEMALE
- RoHS COMPLIANT

ELECTRICAL SPECIFICATIONS

FREQUENCY:	2000 – 8000 MHz.
INSERTION LOSS:	< 0.55 dB
VSWR:	< 1.30:1
ISOLATION:	NON-ISOLATED
AMPLITUDE BALANCE:	±0.25 dB
PHASE BALANCE:	±6°
POWER:	150 WATT
TEMPERATURE:	-55°C TO +85°C

MATERIAL AL. ALLOY 6061-T651	DWN S.Cornell	DATE 6-1-18	Innovative <i>Power</i> <i>Products</i>		
	ENG DG	DATE 6-18			
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290, .0003 MIN. SEMI-BRIGHT	MANUF	DATE	TITLE OUTLINE		
	CAGE CODE: 437R2		2 - WAY 2000 - 8000 MHz 150 WATT		
TOLERANCE .xxx ±.005 [.127] IN [MM] .xx ±.02 [.50] ANG. ±1/2°	SHEET OF 1 1	SCALE 1:1	SIZE B	P/N IPP-1300	REV. A