


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
7477	1	PRE-RELEASE	DG	2-19

PRELIMINARY

DIMENSIONS AND SPECIFICATIONS
ARE SUBJECT TO CHANGE UNTIL
INITIAL RELEASE OF DRAWING.

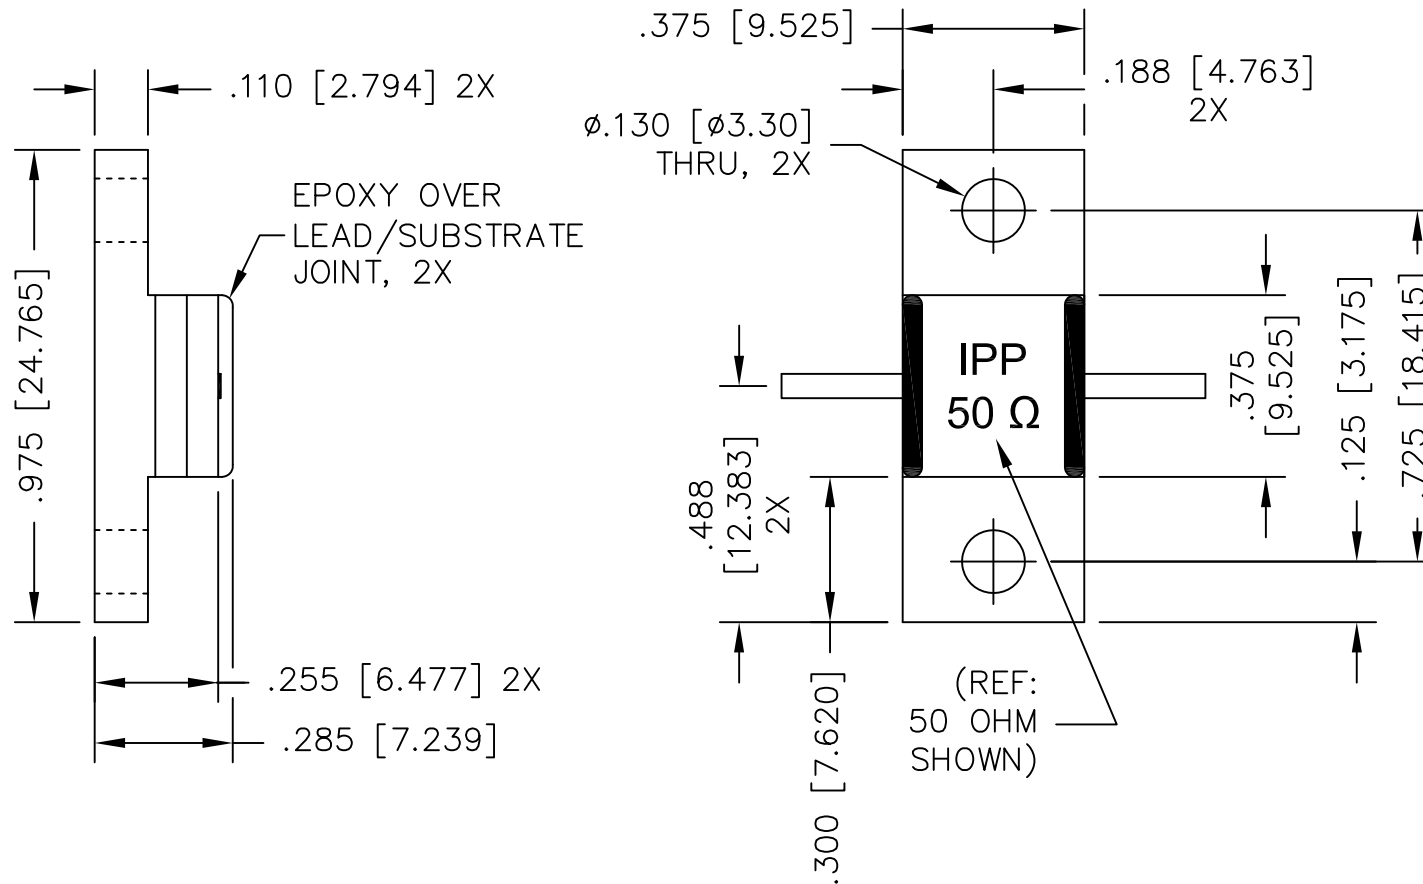


NOTES:

1. LEAD MATERIAL: 99.99% PURE SILVER, .050 [1.270] WIDE x .005 [.127] THICK x .250 [6.350] MIN. LONG.
2. LEAD FINISH: GOLD PLATE PER MIL-G-45204, TYPE 3, GRADE A, 20 MICRO-INCHES MAX.
3. SUBSTRATE MATERIAL: AIN FLANGE MATERIAL: COPPER PLATING: NICKEL
4. LEAD(S) WELDED TO SUBSTRATE.
5. THICK FILM.
6. RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

INPUT POWER: 200 WATT
CAPACITANCE: 2.1 pF

POWER DERATING CURVE

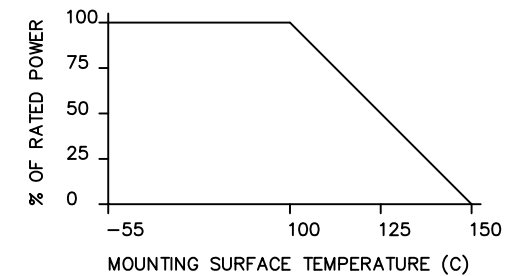

PART NO.	VALUE	TOLERANCE
IPP-RN213LC-25	25 OHMS	+/- 5%
IPP-RN213LC-50	50 OHMS	+/- 5%
IPP-RN213LC-100	100 OHMS	+/- 5%
IPP-RN213LC-200	200 OHMS	+/- 5%

MATERIAL SEE NOTES	DWN S.Cornell	DATE 2-6-19	<i>Innovative</i> <i>Power</i> <i>Products</i>			
	ENG DG	DATE 2-19				
FINISH SEE NOTES	MANUF	DATE	TITLE RESISTOR, AIN, LOW C, 200 WATT, FLANGE			
	CAGE CODE: 437R2					
TOLERANCE IN [MM] .XX ±.02 [.50] .XXX ±.010 [.254]	SHEET 1	OF 1	SCALE 4:1	SIZE B	P/N IPP-RN213LC-XXX	REV. 1