


C806

Fundamental Tuner (0.6-8GHz)

General


Since 1989 Focus Microwaves manufactures wideband coaxial programmable (slide screw) impedance tuners from 100MHz up to 120GHz. Focus' fundamental tuners were designed with versatility in mind. The C (Computer Controlled Microwave Tuner) family of tuners have one to three wideband probes enabling very wideband frequency coverage making it ideal for high power applications as well as wideband noise applications.

The very long lasting RF probes used in the tuner are also designed for optimal tuning accuracy, free of spurious resonances. The combination of multiple probes provide ultra wideband coverage in one single tuner. All Focus tuners are LAN controlled and include on-board impedance synthesis firmware (iTuner).

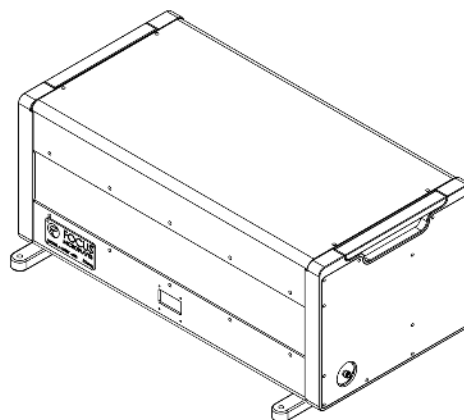


Model	Freq. Range (GHz)	Connector Type	VSWR	Maximum Power* (W, CW)	Repeatability (min, dB/ typical, dB)	Weight (lbs)	Length (in)
C806	0.6 - 8.0	3.5 mm	0.6 to 1.0 GHz > 50:1 1.0 to 8.0 GHz > 80:1	93	-40/-50	25	17.232



VSWR Lo/Hi

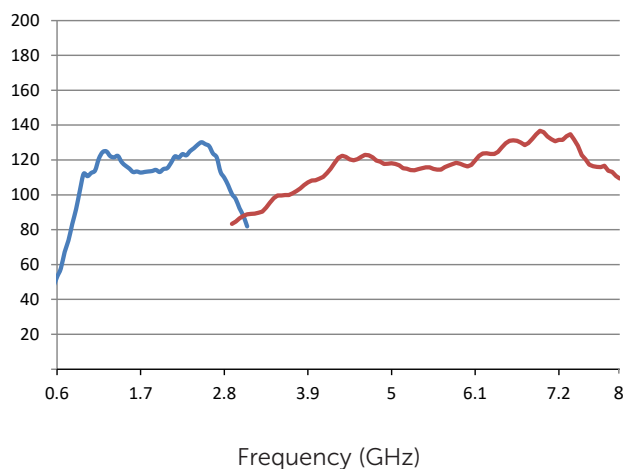

Insertion Loss (dB) (Probe withdrawn)

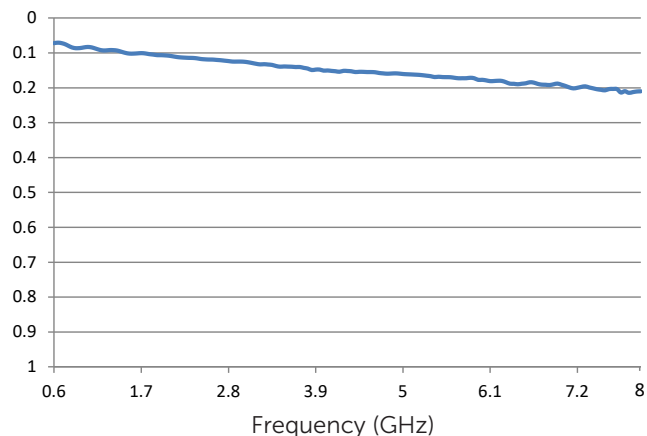

Dimensions

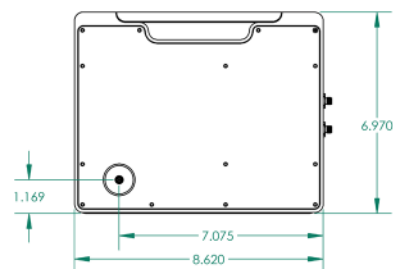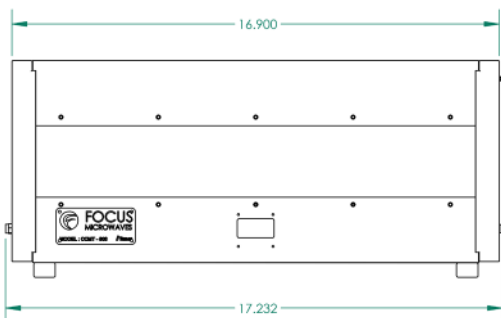

*at 8GHz (connector limited)

DS-C806-V03

Automatic Measurement Systems



4555 Chemin du Bois-Franc, Saint-Laurent, QC. H4S 1A8, Canada
T: (514) 684-4554 F: (438) 380-4068 W: www.focus-microwaves.com

The information contained in this leaflet can change without prior notice, all rights reserved.