

WR10 Absorptive Coaxial SP2T Switch 75GHz-110GHz



Note: Photo is for illustration purposes only.
Please refer to outline drawing.

Features

- TTL compatible driver included
- Fast Switching Speed
- Low Power Cold Switching
- Insertion Loss 13dB
- Isolation 25dB Typical
- 50 Ohm Matched

Product Description

RFSP2TA75110GW10 is a waveguide absorptive coaxial single pole double throw switch with a frequency range of 75 to 110GHz.

The maximum power input of this switch is 15dBm. The insertion loss is 13dB with a typical isolation of 25dB.

The product features fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), Vdd = +5V/-5V, TTL = 0 / +5V

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		75-90			90-110		GHz
Insertion Loss		13			17		dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ °C
Isolation		25			25		dB
Input VSWR			3		3		: 1
Output VSWR			3		3		: 1
RF Input Power			15			15	dBm
DC Power Dissipation		0.8			0.8		W
IIP3		35			32		dBm
Switching Speed			350Typ				ns
Bias Current (+5V / -5V)			10/10 Max.				mA
Weight			/ Max.				lbs
Impedance			50				Ω
Input / Output Connectors					WR10		
Package					Epoxy Sealed (Standard)		
					Hermetically Sealed (Optional)		

Absolute Maximum Ratings

Parameter	Rating
Biasing	+5V±10%/-5V±10%


* TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged.

Environmental Specifications and Test Standards


Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight <=20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)

** For vibration testing details please see additional information section.

Outline Drawing

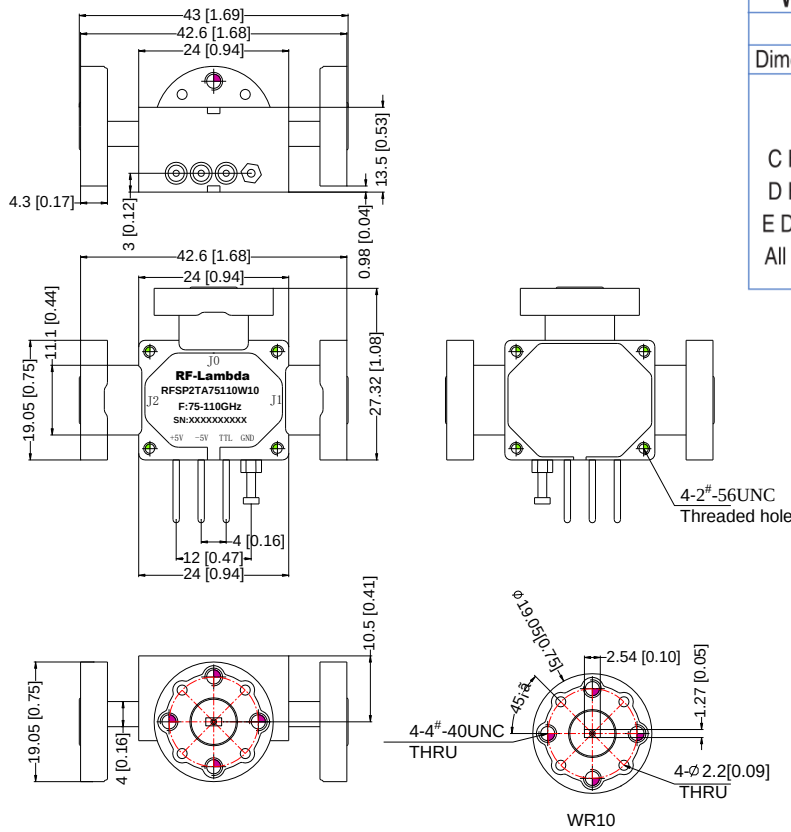


WR10	WG27	R900
UG387/U		
Dimensions	inches	mm
A	0.750	19.05
B	0.563	14.29
C Holes	4-40 UNC-2B	
D Holes	0.063	1.613
E Dowels	0.061	1.555
All Holes	0.563	14.29



Truth Table

TTL Control Voltage	Low(0)=0~0.8V
THRESHOLD	High(1)=2.8~5V
Control Input TTL	State
1	J0-J1
0	J0-J2
Control Pin	Customization available upon request



Notes:

1. Package Material: Aluminum
2. Finish: Gold Plated
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.1 [0.004] unless otherwise specified.
5. Standard torque wrench must be used to secure RF connectors.

Additional Information

Documentation

Webpage

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP2TA75110GW10	Connectors 1.0mm-Female	75GHz-110GHz WR10 SP2T PIN Diode Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.