

WR12 Reflective Coaxial SP2T Switch 60GHz-90GHz



Product Description

RFSP2TR6090GW12 is a WR12 reflective coaxial single pole double throw switch with a frequency range of 60 to 90GHz.

The maximum input power of this switch is 23dBm. The insertion loss is 4.5dB with a typical isolation of 35dB.

The product features fast switching speed, low insertion loss and high isolation.

The working temperature of this product is between - 40°C and + 85°C

Features

- Wide Band Operation 60 - 86GHz
- Functional Bandwidth : 50 - 90GHz
- Fast Switching Speed
- Low Power Cold Switching
- Insertion Loss 4.5dB Typical
- Isolation 35dB Typical
- 50 Ohm Matched

Typical Applications

- Wireless Infrastructure
- Military and Aerospace Applications
- Test Instrumentation
- Radar Systems
- 5G Wireless Communications
- Microwave Radio Systems
- TR Modules
- Research and Development
- Cellular Base Stations

Electrical Specifications(TA = +25°C), Vdd = +5V/-5V, TTL = 0 / +5V

Parameter	Min	Typ	Max	Min	Typ	Max	Units
Frequency Range		60-75		75-86 (Functional to 90)			GHz
Insertion Loss		4.5	5.5		5.5	7.0	dB
Insertion Loss Temperature Coefficient		0.003			0.003		dB/ °C
Isolation	30	35		24	27		dB
Input VSWR		2.2	3		2.2	3	: 1
Output VSWR		2.5	3		2.5	3	: 1
RF Input Power (CW)			23			23	dBm
DC Power Dissipation		0.3			0.3		W
IIP3		45			45		dBm
Switching Speed		100			100		ns
Bias Current (+5V / -5V)			50/20Max.				mA
Weight			0.053 Max.				lbs
Impedance			50				Ω
Input / Output Connectors				WR12			
Package	Epoxy Sealed (Standard)						
	Hermetically Sealed (Optional)						

Absolute Maximum Ratings

Parameter	Rating
Biasing	+5V±10%/-5V±10%

* TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged.


Environmental Specifications and Test Standards

Parameter	Description
Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Thermal Shock	-40°C → +85°C (5 Cycles / 10 hours)
**Random Vibration	MIL-STD-202G Table 214-I, Test Condition Letter C 1.5 Hours Per Axis
High Temperature Burn In	Temperature +85°C for 72 Hours
Shock	1. Weight >20g, 50g half sine wave for 11ms, Speed variation 3.44m/s 2. Weight ≤20g, 100g Half sine wave for 6ms, Speed variation 3.75m/s 3. Total 18 times (6 directions, 3 repetitions per direction).
Altitude	Standard: 30,000 Ft (Epoxy Sealed Controlled Environment) Optional: Hermetically Sealed (60,000 ft. 1.0 PSI min)
Hermetically Sealed (Optional)	MIL-STD-883 (For Hermetically Sealed Units)


** For vibration testing details please see additional information section.

Typical Performance Plots


Insertion Loss @+25°C

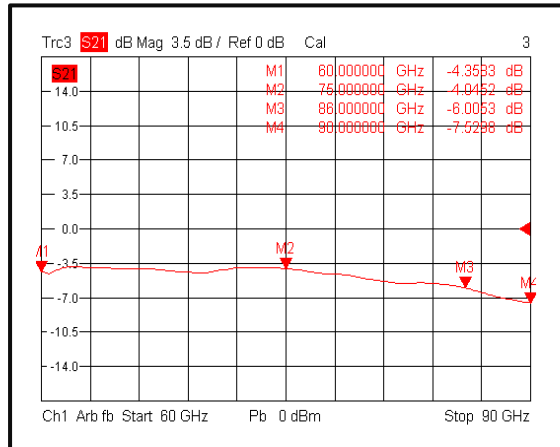


Input VSWR @+25°C

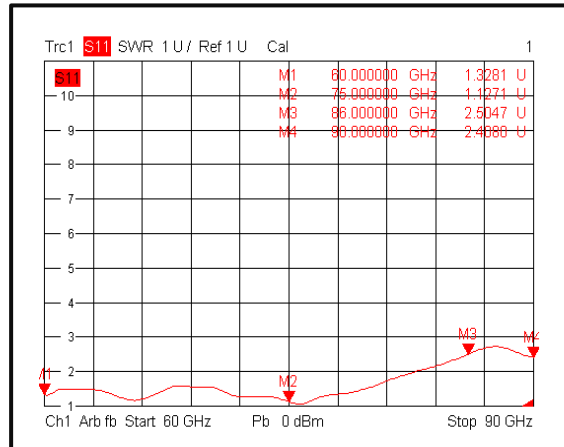


Output VSWR @+25°C

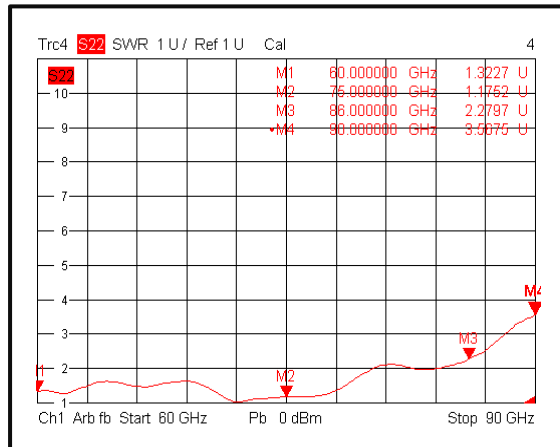


Isolation @+25°C

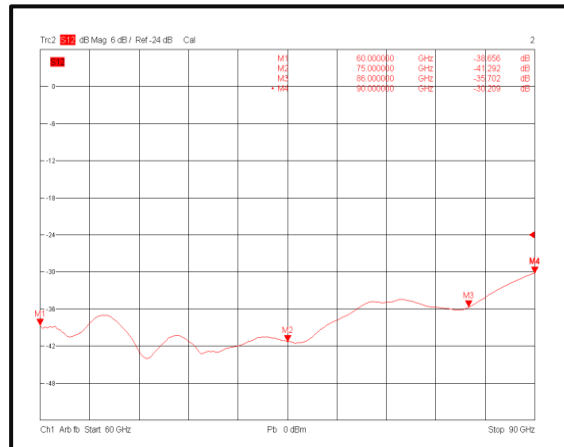

Insertion Loss @-40°C

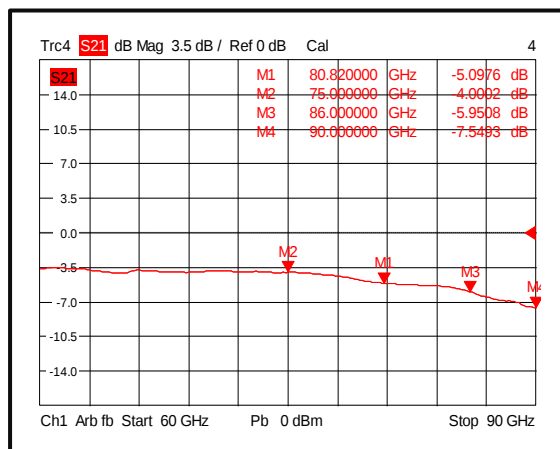


Input VSWR @-40°C

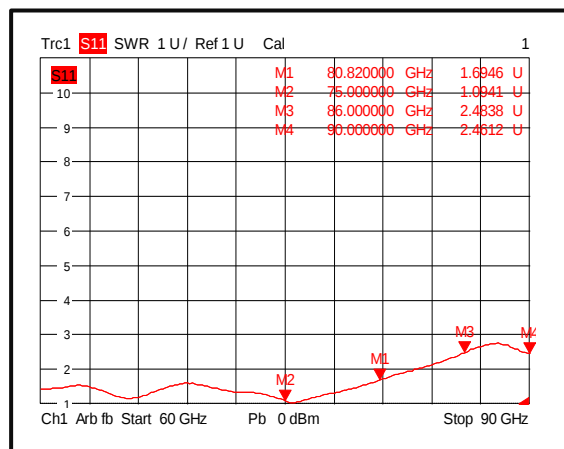


Typical Performance Plots


Output VSWR @-40°C

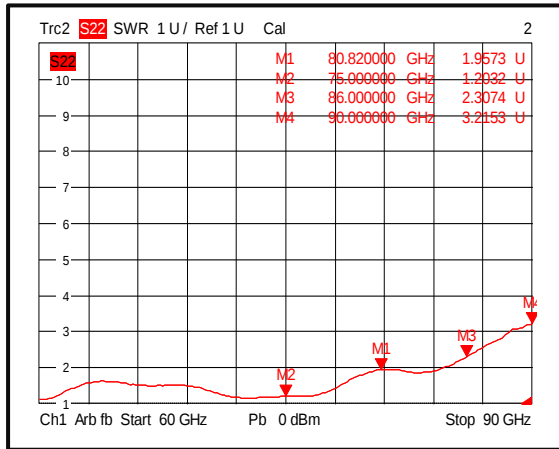


Isolation @-40°C

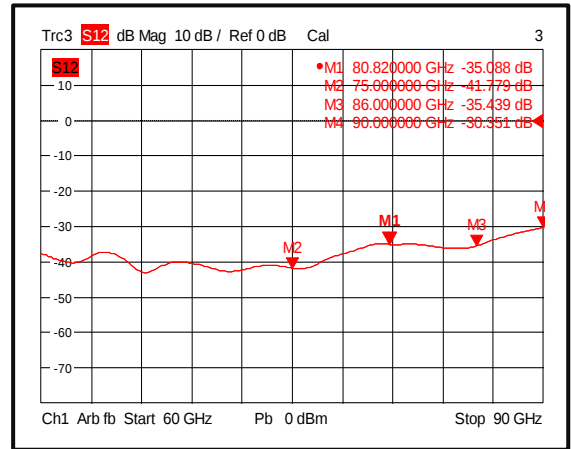


Insertion Loss @+85°C

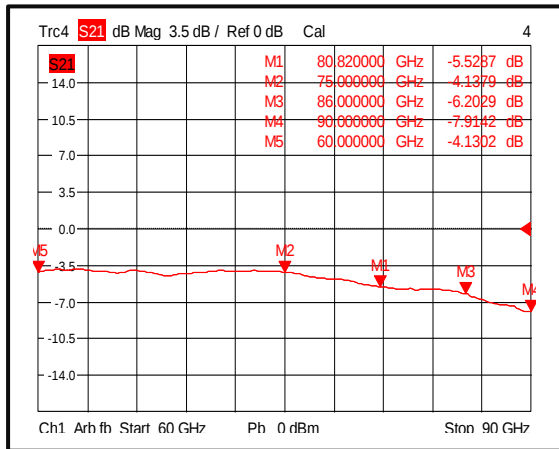


Input VSWR @+85°C

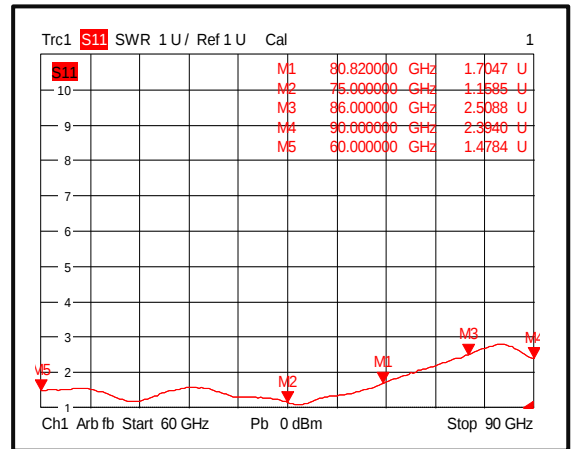


Output VSWR @+85°C

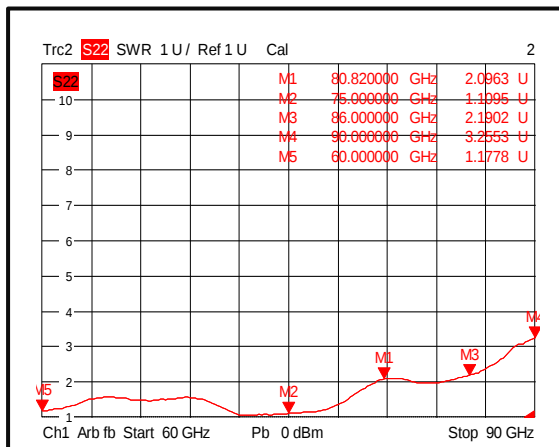


Isolation @+85°C

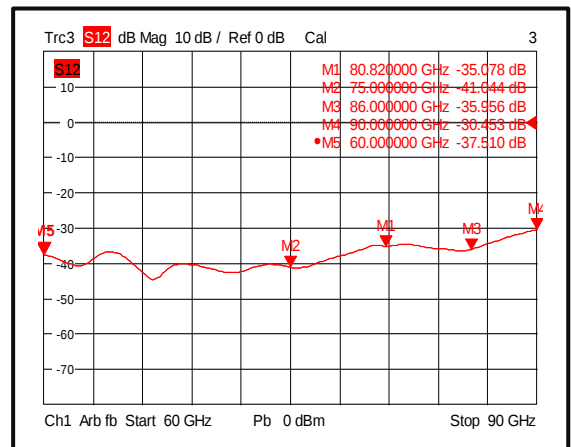

Outline Drawing

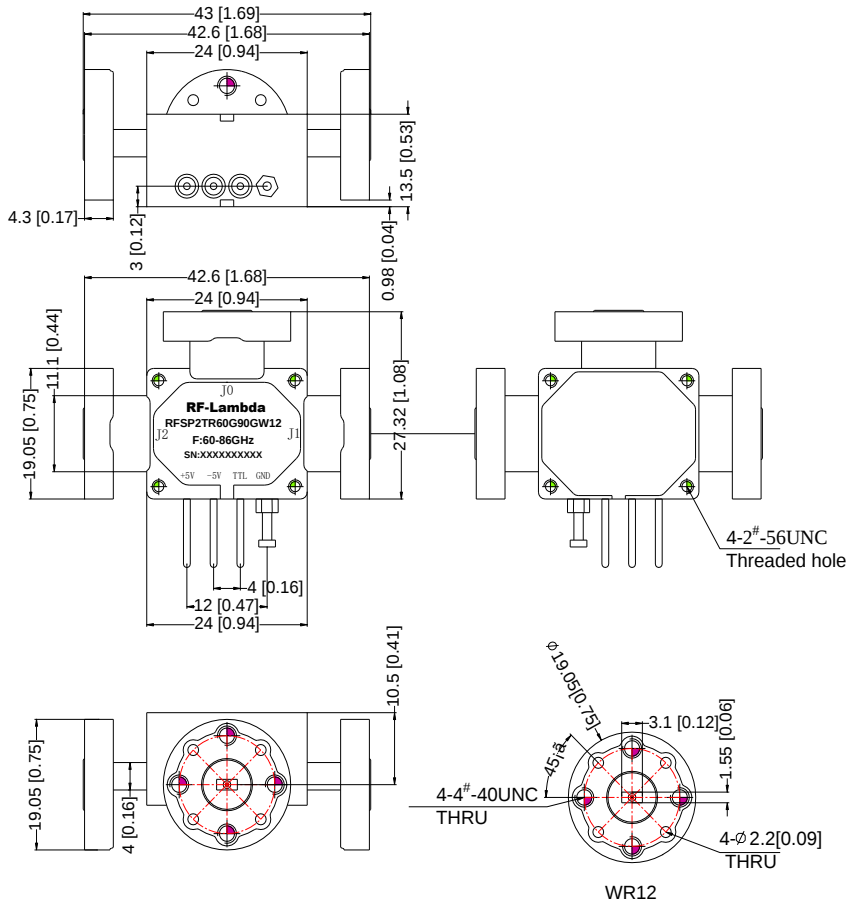


	WR12	WG26	R740
	UG387/U		
Dimensions	inches	mm	
A	0.750	19.05	
B	0.563	14.29	
C Holes	4-40 UNC-2B		
D Holes	0.063	1.613	
E Dowels	0.061	1.555	
All Holes	0.563	14.29	



Truth Table		
TTL Control Voltage	Low(0)=0~0.8V	
	High(1)=2.8~5V	
Control	Input TTL	Signal Path State
0		J0-J1
1		J0-J2
Control Pin Customization available upon request		

Notes:

1. Package Material: Aluminum
2. Finish: Gold Plated
3. All dimensions are in millimeters [inches].
4. Housing Tolerances ± 0.1 [0.004] unless otherwise specified.
5. Standard torque wrench must be used to secure RF connectors.



Additional Information

Documentation

Webpage

ESD Policy

https://rflambda.com/pdf/rflambda_esd_control.pdf

Connector Torque Specifications

https://www.rflambda.com/pdf/Torque_Specifications.pdf

Random Vibration Test Standard

https://www.rflambda.com/pdf/rflambda_random_vibration_MIL-STD-202G.pdf

Ordering Information

Part Number	Modification	Description
RFSP2TR6090GW12	WR12	60GHz-90GHz SP2T PIN Diode Switch

Important Notice

The information contained herein is believed to be reliable. RF-Lambda makes no warranties regarding the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for any of the information contained herein. RF-Lambda assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for RF-Lambda products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. RF-Lambda products are not warranted or authorized for use as critical components in medical, life-saving, or life sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.